

IQeye Alliance-mini

H.264 Megapixel Dome IP Camera

Features

- > Resolutions up to HD1080p
- > H.264 Main Profile + MJPEG Compression
- > 60 fps @ SD480p, 30 fps @ HD1080p
- > Varifocal, Wide and Telephoto Lens Options
- > Two-Way Audio with Built-in Microphone
- > 3-Axis Gimbal
- > Lightgrabber™ II Low-light Feature
- > Power-over-Ethernet
- > Cast-Aluminum
- > Direct-to-Storage (DTS)
- > ONVIF and PSIA Compliant
- > 5 Year Warranty

World's first varifocal mini dome, the Alliance-mini offers exceptional image quality in a tiny, versatile and attractive package. It is available in interior vandal models from VGA to HD1080p megapixel resolutions, making it one of the smallest professional high-resolution surveillance cameras available today. At only 2.78 inches in height, the Alliance-mini is designed for discreet indoor use, ideal for retail, education, gaming and healthcare environments. These ultra lightweight cameras easily mount to ceilings or walls, and the true 3-axis gimbal, locking shroud and Power-over-Ethernet design saves time and money on installation and maintenance. The Alliance-mini supports streaming audio, allowing two-way communication between the camera and remote/monitoring locations. The Alliance-mini includes black and beige trim rings for convenience. Options include pendant mount and gang box adapter accessory kits, varifocal, wide and telephoto lenses.



IQ inVision 



BOCK OPTRONICS INC
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6, Canada
Tel: (416)-674-2804 Fax: (416)-674-1827
Website: www.bockoptronics.ca
E-mail: sales@bockoptronics.ca

IQeye Alliance-mini

H.264 Megapixel Dome IP Camera



Specifications

Video

Compression	H.264 and MJPEG
H.264 Profile	Main
Sensor	1/3" CMOS
JPEG Compression Quality Settings	User Configurable
Shutter Speed	Auto/Programmable/Fixed
Image Settings	Saturation, Contrast, Brightness, Sharpness, Lightgrabber™ II
Exposure	User Configurable
White Balance	Auto/Programmable
Backlight Compensation	Auto

Features

Motion Detection	User Configurable Windows
Time Lapse Recording	User Configurable
Event Based Recording	User Configurable
Flip and Rotate	180, Horizontal, Vertical
Audio Support	Two-way G.711 PCM 8 kHz
IQapps and Utilities	IQaccess, IQfinder, IQmanager, IQevent, Direct-to-Storage (DTS)

Network

Supported Protocols	TCP/IP, HTTP, HTTPS, DHCP, UDP, RTP, RTSP, DNS, ARP, ICMP, NTP, UPnP, ZeroConf, APIPA, UDP multicast, SNMP, FTP, SMTP, Telnet, CIFS
---------------------	---

Password Protection	Secure Multi-level
---------------------	--------------------

Input/Output

Input Power	Power over Ethernet 802.3af Class 2
-------------	-------------------------------------

Power Consumption	< 4.0W (typical)
-------------------	------------------

AC Lighting	50 Hz/60 Hz Selectable
-------------	------------------------

Network Interface	RJ45 10Base-T/100Base-TX
-------------------	--------------------------

Audio I/O	Built-in Microphone, Mic/Line in, Line out
-----------	--

Misc

Approvals	FCC, CE, UL, cUL
-----------	------------------

Temperature Range	32° F to 104° F, 0° C to 40° C
-------------------	--------------------------------

Weight (grams)	298 g
----------------	-------

Warranty	5 years
----------	---------


Lens Options	B7* Wide Angle Varifocal Lens 1/2.7" M12, 3-6mm, F2.0 F1 Wide Angle Lens 1/3" M12, 4.2 mm, F1.8 F2 Wide Angle Lens 1/3" M12, 2.8 mm, F2.6 F3 Telephoto Lens 1/3" M12, 8 mm, F1.8 F4 Wide Angle Lens 1/3" M12, 3.6 mm, F1.8
--------------	--

Accessories	IQD4-PB Pendant Mount Black IQD-GBA Gang Box Adapter
-------------	---


Product Configurations

Part Number	Max Resolution	Max Framerate	Min Illumination	Compatible Lens
IQD30SV	SD480p - 720 x 480	60 fps	Color: 0.1 lux	B7 F1, F2, F3
IQD31SV	HD720p - 1280 x 720	30 fps	Color: 0.1 lux	B7, F1, F2, F3
IQD32SV	HD1080p - 1920 x 1080	30 fps	Color: 0.2 lux	B7*, F1, F3, F4

Dimensions

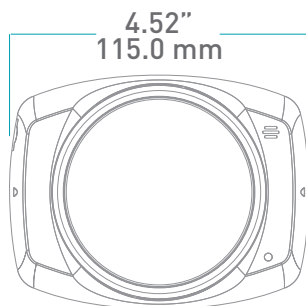

Top

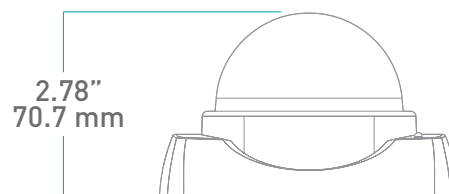

Side

*IQD32SV-B7 Lens Note: Adjusting the Field-of-View (FoV) wider than the maximum specified by IQinVision can result in vignetting.