

Compact 4.8 mm focal length C-mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this wide angle lens is ideal for challenging mapping solutions. The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed. As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered.

Another option is the High-end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 6 mm, 8 mm, 12 mm, 17 mm, 23 mm and 35 mm.



Cinegon 1.8/4.8

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Cinegon 1.8/4.8
Type	-0902 -0912 -1902 -0903
Focal Length [mm]	4.8
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	1.8 ... 8
NA	0.28
Interface	C-Mount
Working distance [mm]	∞ - 37
AoV [°]	95
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M62 x 0.75 with adapter
Dimensions L x D [mm]	47.3 x 50.0

Name	Cinegon 1.8/4.8
Weight [g]	134
Storage temperature [°C]	-25 ... +70
f'_{eff} [mm]	4.98
S_F [mm]	13.16
S'_F [mm]	13.17
HH' [mm]	35.70
$\beta'P$	6.568
S_{EP} [mm]	13.92
S'_{AP} [mm]	-19.53
Σd [mm]	45.65
ID	1001955
ID Ruggedized	1058930
ID Motorized p-iris	1061448
ID High-end 3D	1062311

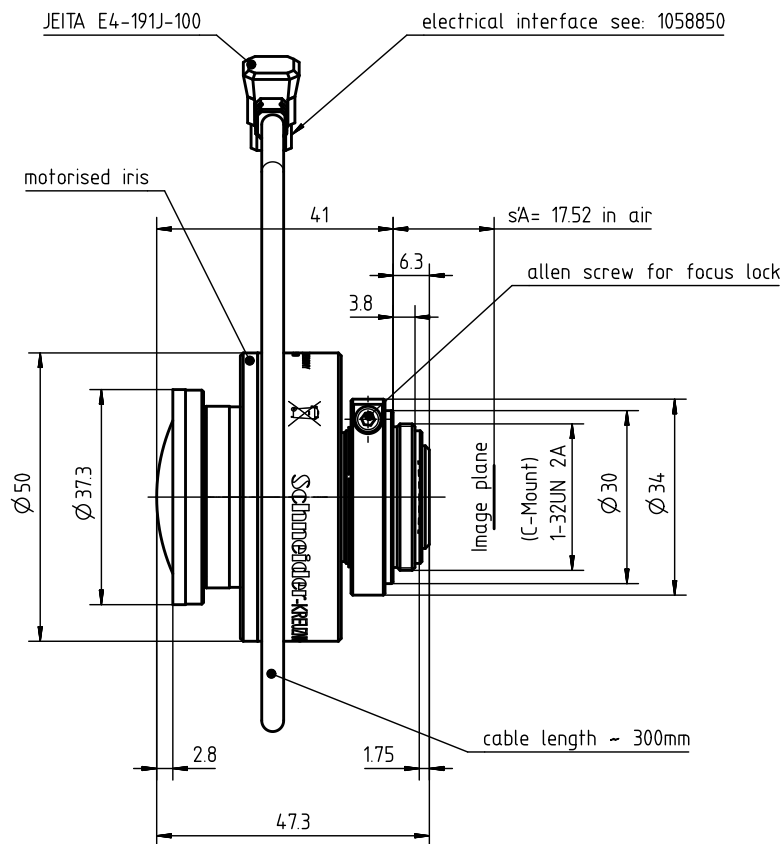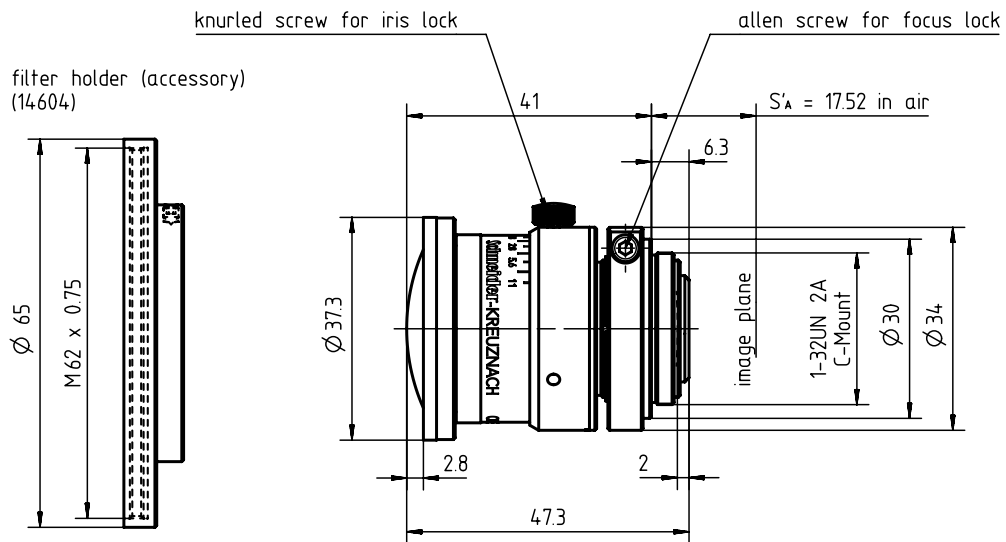


Motorized p-iris


Distortion vs. Image Height

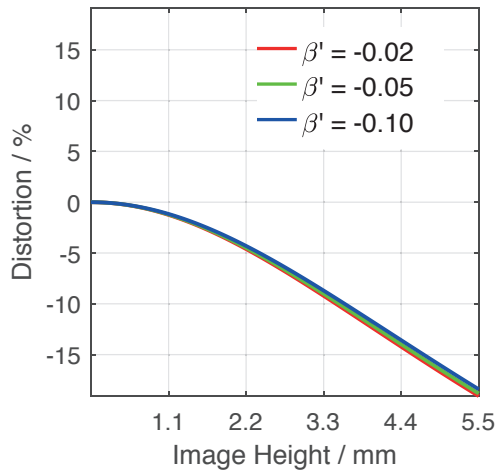


Transmittance vs. Wavelength

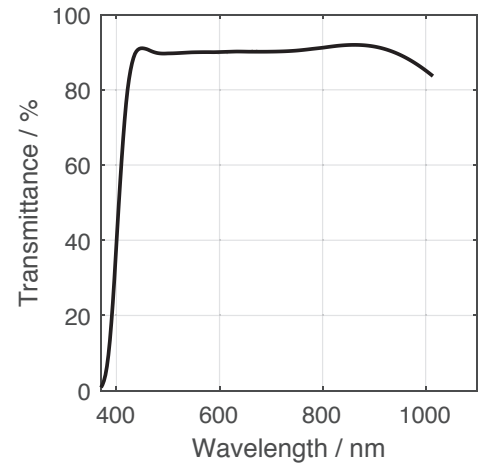

Relative Illumination vs. Image Height

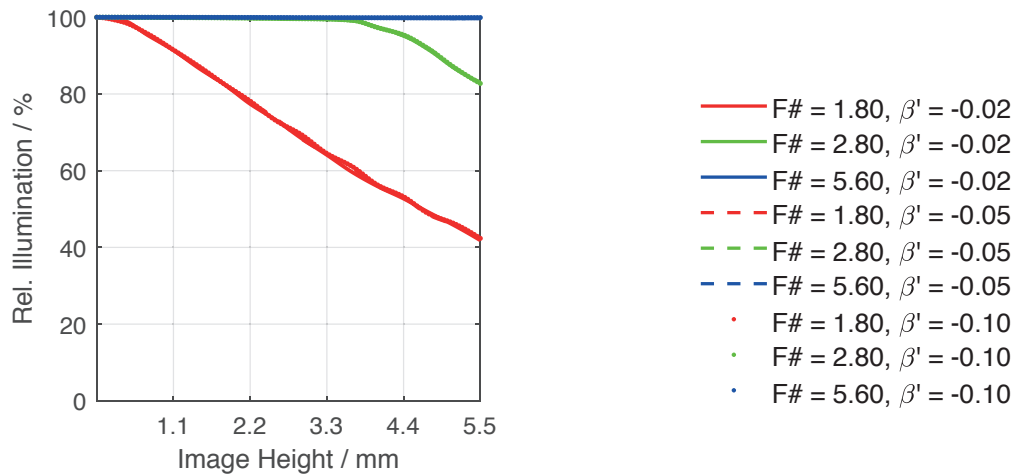

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

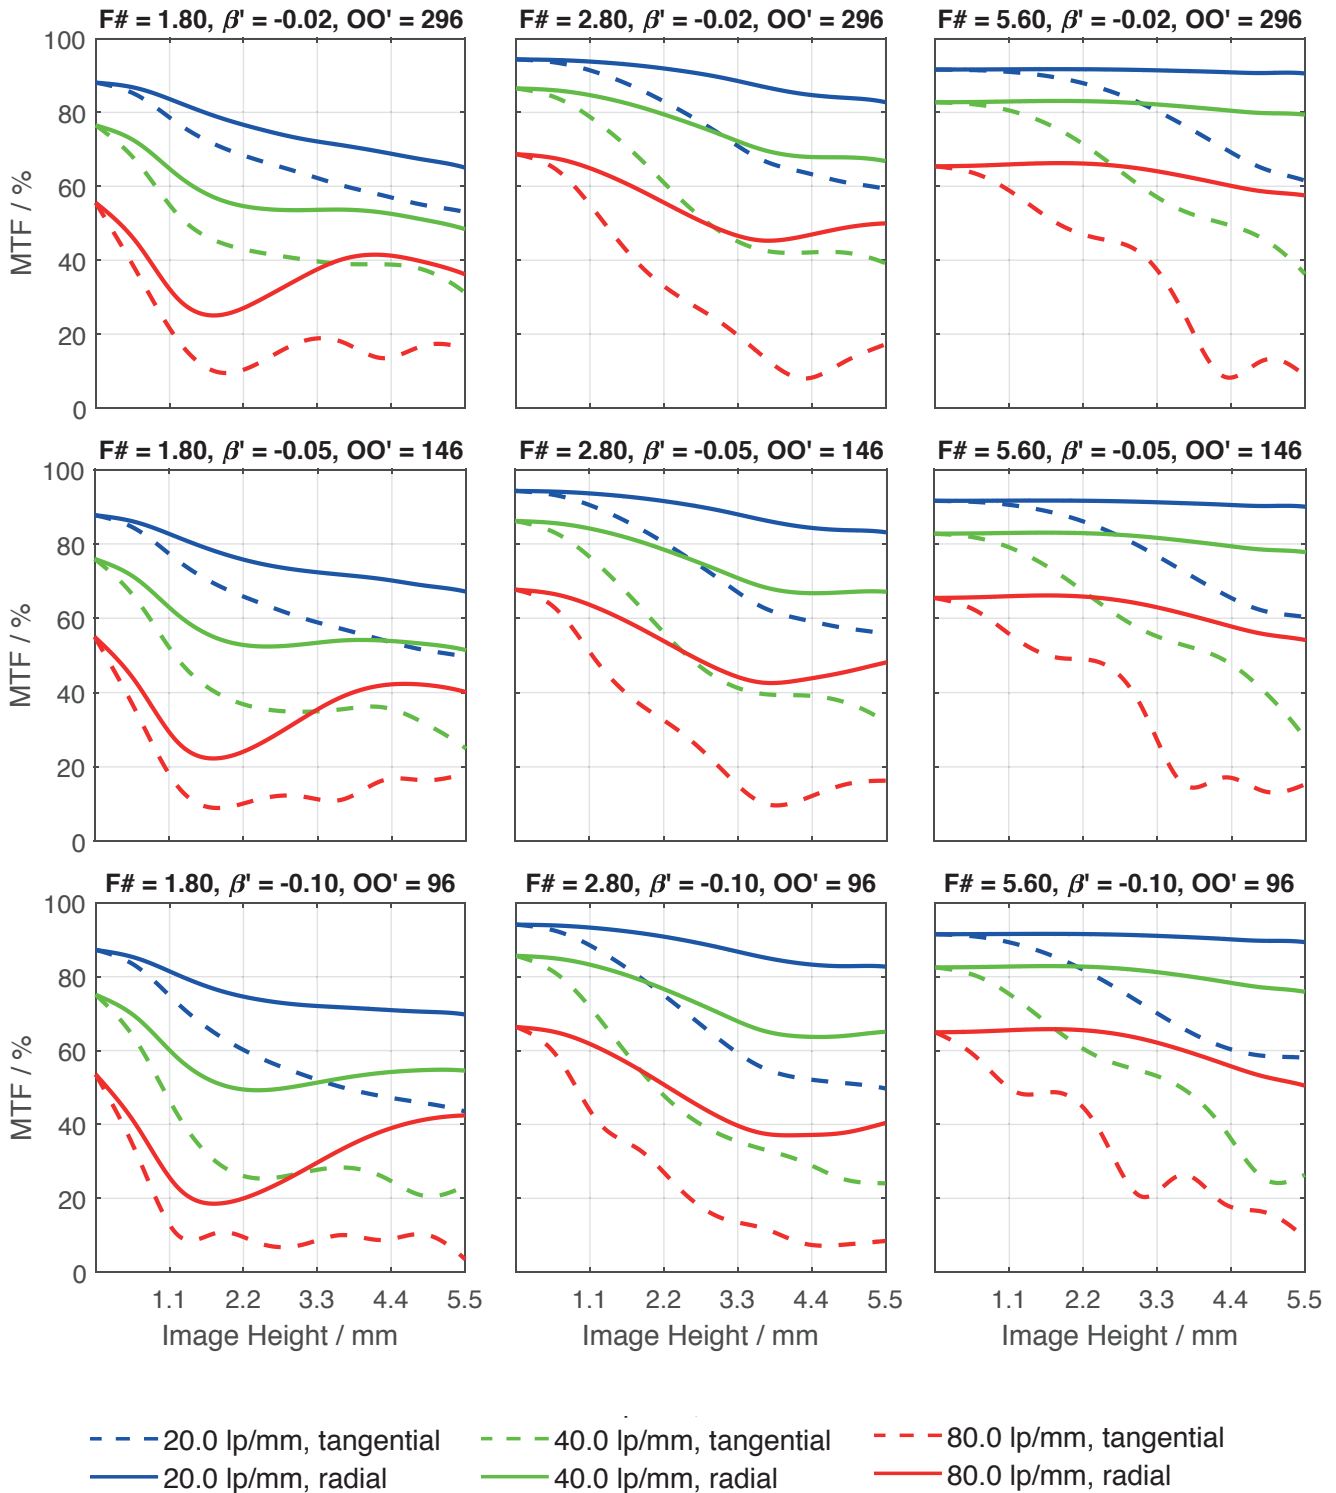

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312
Filter Holder	M62 x 0.75	-	14604

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH

Ringstraße 132

55543 Bad Kreuznach

☎ +49 671 601 205

✉ cs@schneiderkreuznach.com

www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170

✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)

☎ +1 800 228 1254 (West Coast)

✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062

✉ thongv@schneiderkreuznach.com

Compact 6 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this wide angle lens is ideal for challenging mapping solutions. The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed.

As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered. Another option is the High-end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot.

And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 8 mm, 12 mm, 17 mm, 23 mm and 35 mm.



Cinegon 2.1/6

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Cinegon 2.1/6
Type	-0901 -0911 -1901
Focal Length [mm]	6
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	2.1 ... 11
NA	0.24
Interface	C-Mount
Working distance [mm]	50
AoV [$^{\circ}$]	83
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M62 x 0.75
Dimensions L x D [mm]	49.5 x 50.0

Name	Cinegon 2.1/6
Weight [g]	154
Storage temperature [$^{\circ}\text{C}$]	-25 ... +70
f'_{eff} [mm]	6.18
S_F [mm]	13.16
$S'_{F'}$ [mm]	15.26
HH' [mm]	35.02
β'_p	11.778
S_{EP} [mm]	13.68
S'_{AP} [mm]	-57.54
Σd [mm]	45.28
ID	1055649
ID Ruggedized	1062873
ID Motorized p-iris	1075636

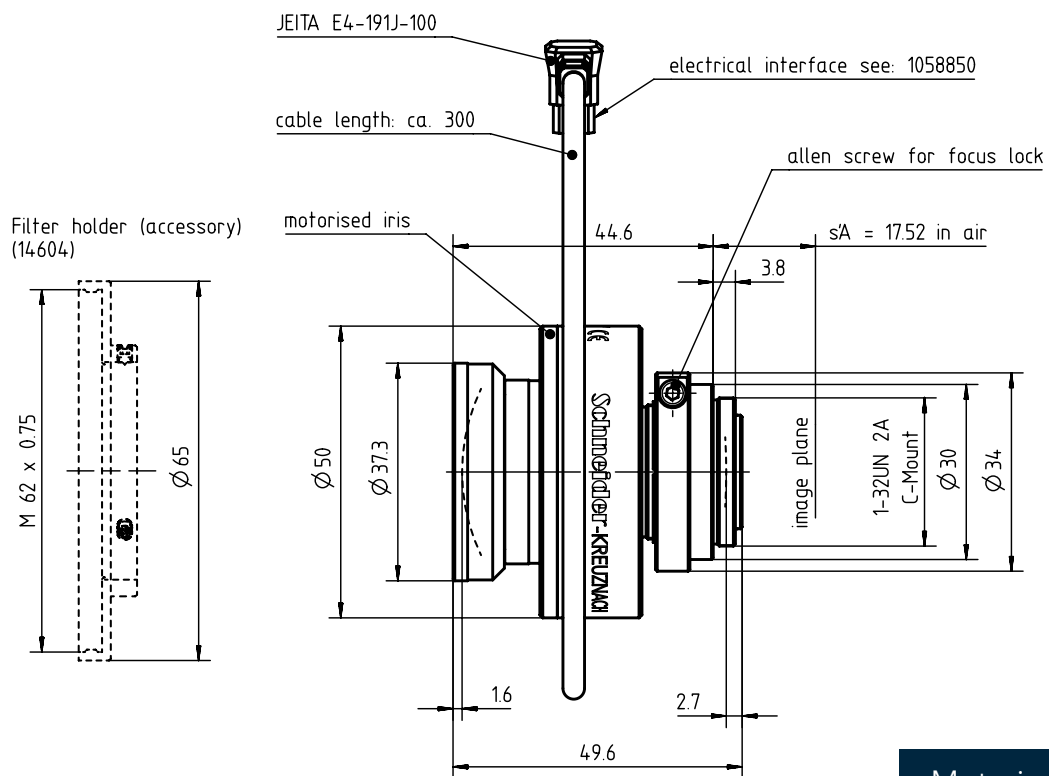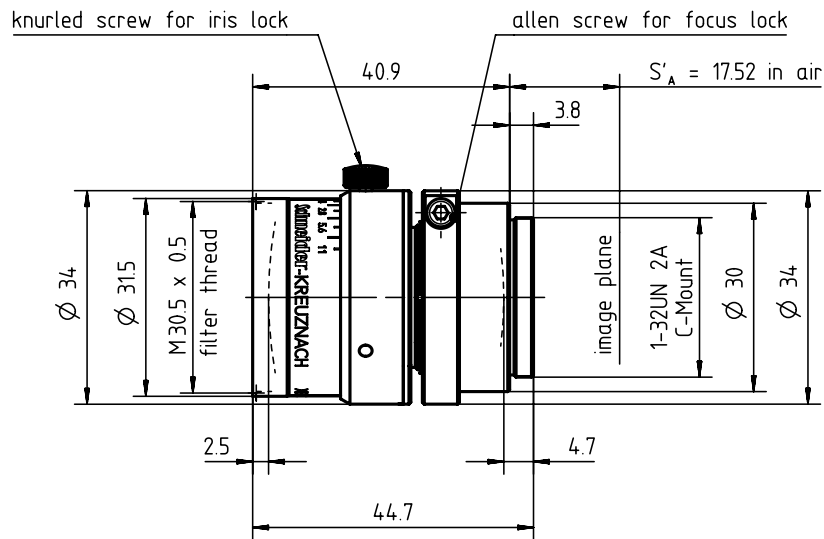


Motorized p-iris


Distortion vs. Image Height

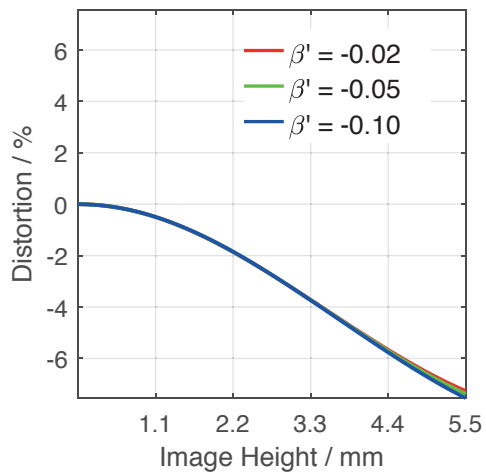


Transmittance vs. Wavelength

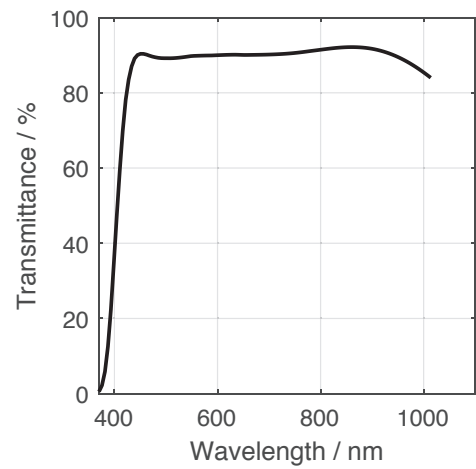

Relative Illumination vs. Image Height

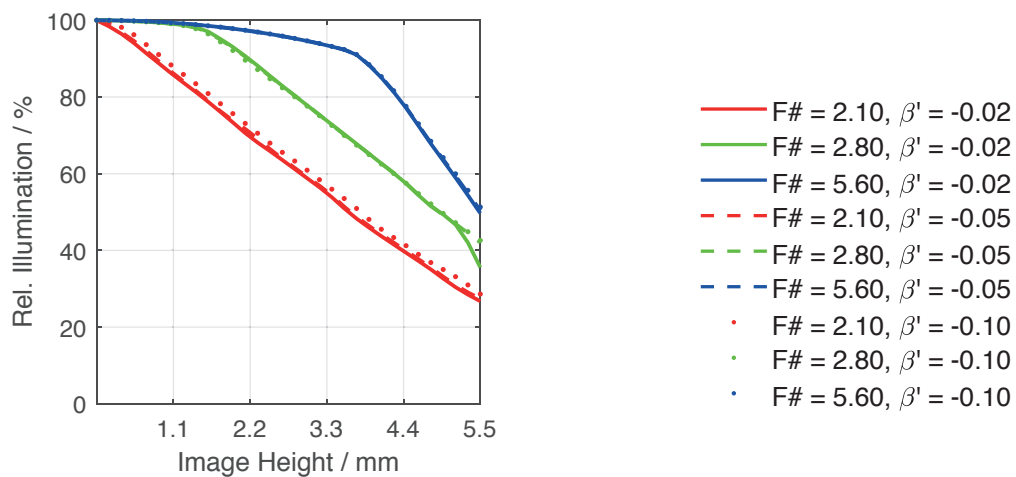

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

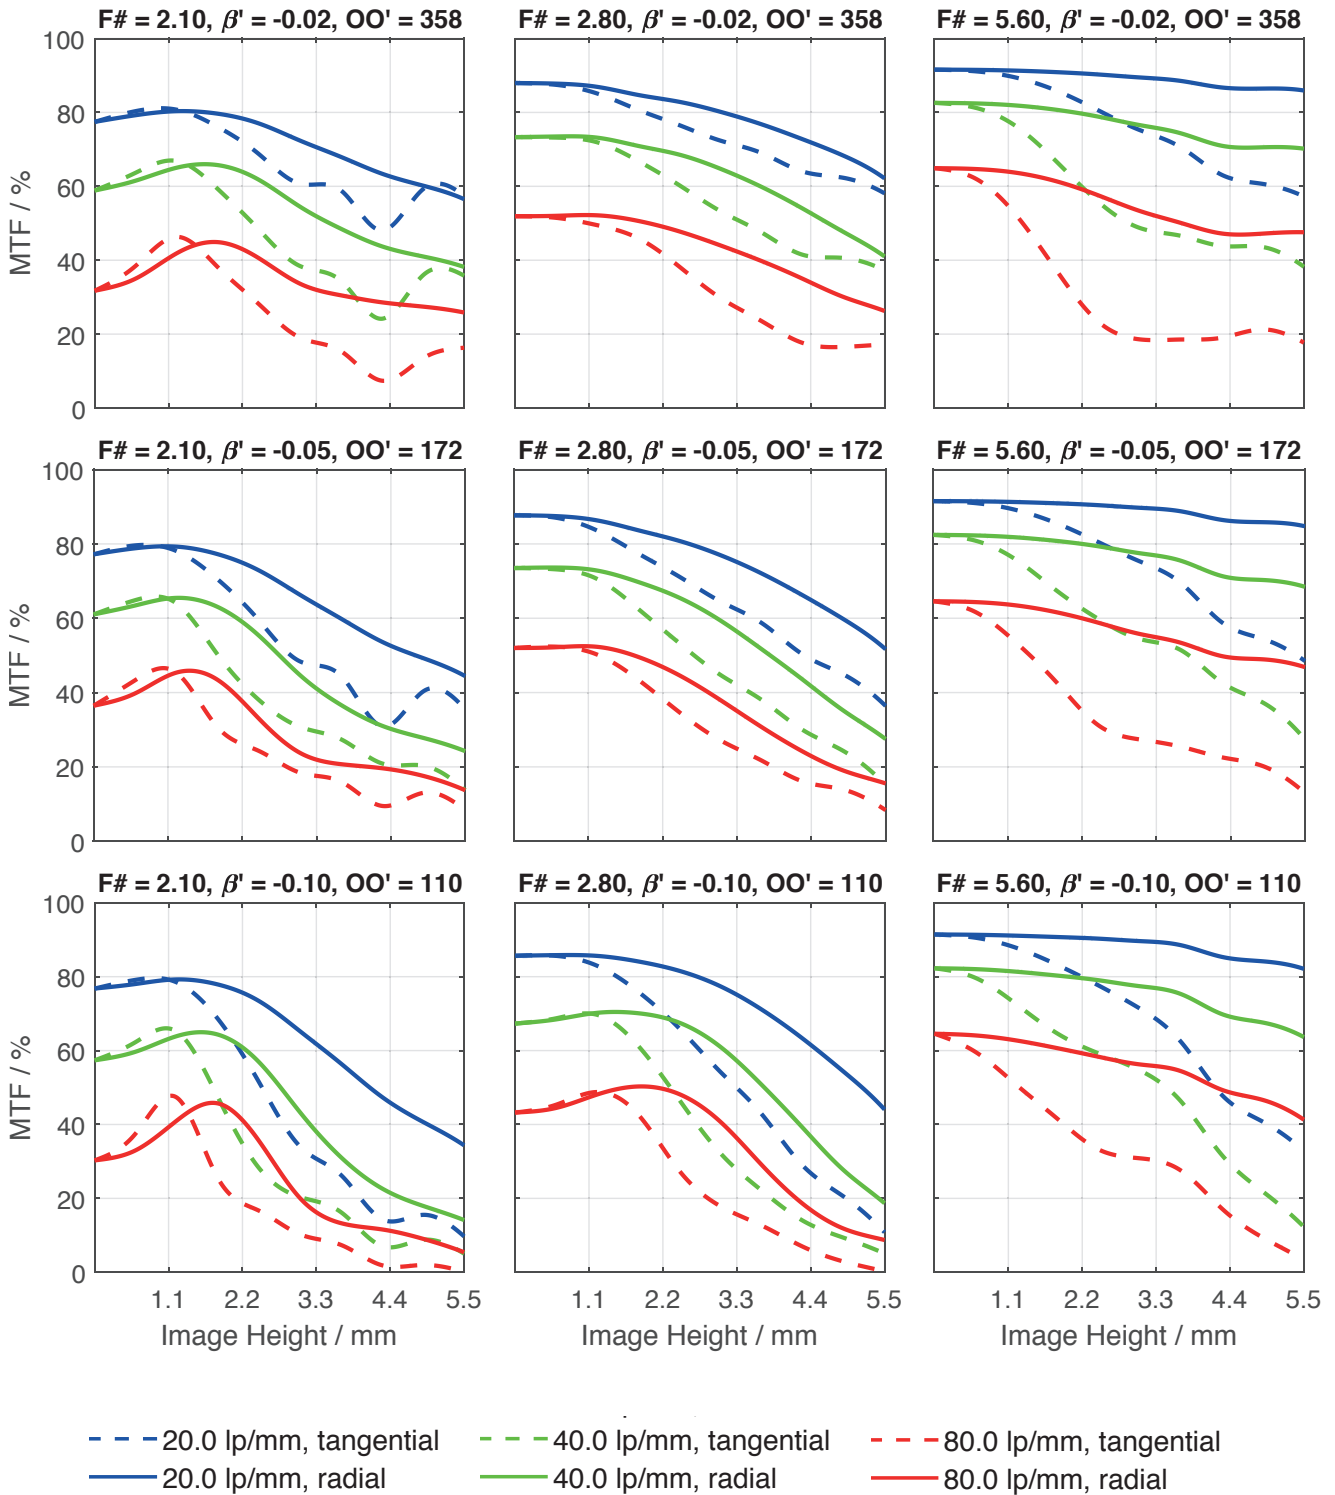

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312
Filter Holder	M62 x 0.75	-	14604

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170
✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062
✉ thongv@schneiderkreuznach.com

Compact 8 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this wide angle lens is ideal for challenging mapping solutions. The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed.

As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered. Another option is the high end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 6 mm, 12 mm, 17 mm, 23 mm and 35 mm.



Cinegon 1.4/8

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Cinegon 1.4/8
Type	-0902 -0912 -1902 -0906
Focal Length [mm]	8
Magnification	-0.1
Image circle [mm]	11
Resolution [μ m]	3.65
F/# range	1.4 ... 8
NA	0.36
Interface	C-Mount
Working distance [mm]	∞ - 72
AoV [°]	67
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M30.5 x 0.5
Dimensions L x D [mm]	37.5 x 50.0

Name	Cinegon 1.4/8
Weight [g]	134
Storage temp. [°C]	-25 ... +70
f'_{eff} [mm]	8.24
S_F [mm]	11.70
S'_F [mm]	12.56
HH' [mm]	20.86
β'_P	4.796
S_{EP} [mm]	13.42
S'_{AP} [mm]	-26.96
Σd [mm]	36.48
ID	1001919
ID Ruggedized	1062858
ID Motorized p-iris	1061449
ID High-end 3D	1068951

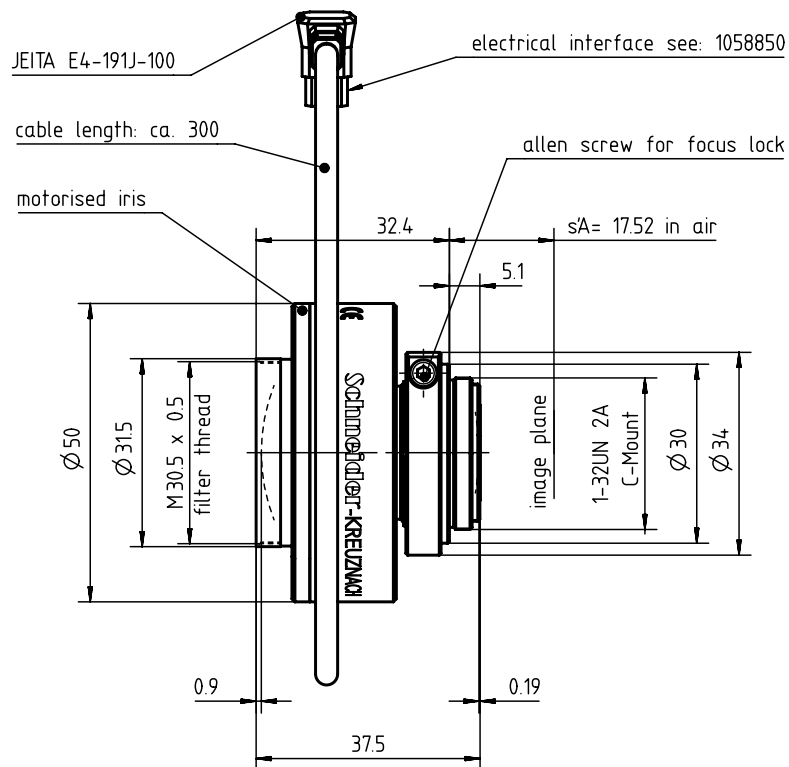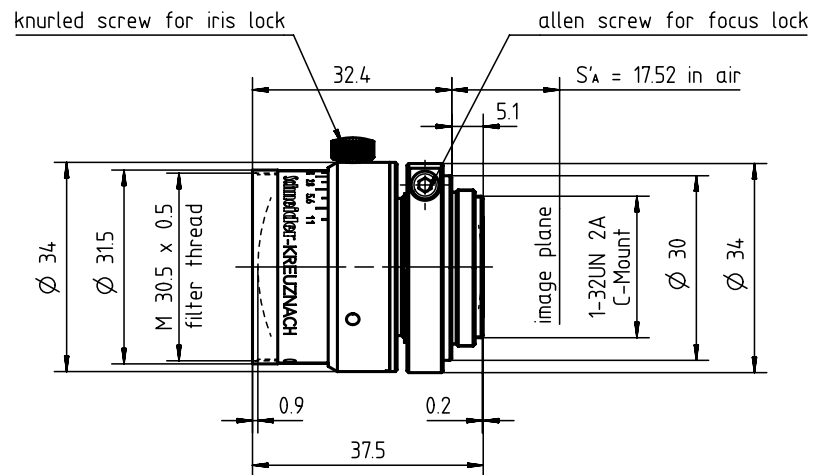


Motorized p-iris


Distortion vs. Image Height

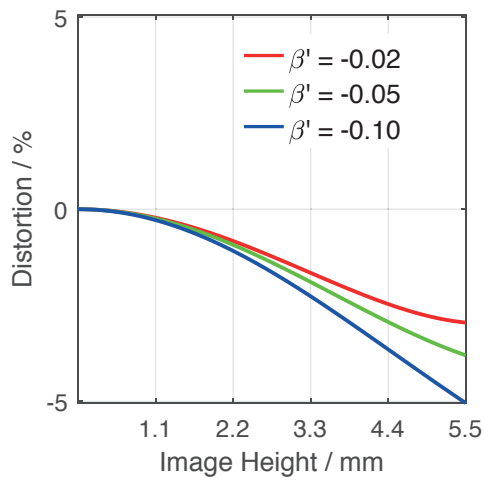


Transmittance vs. Wavelength

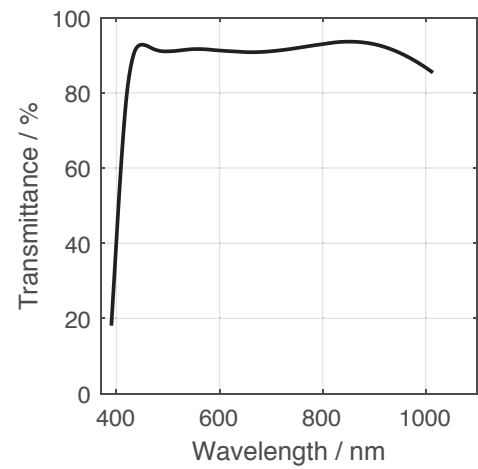

Relative Illumination vs. Image Height

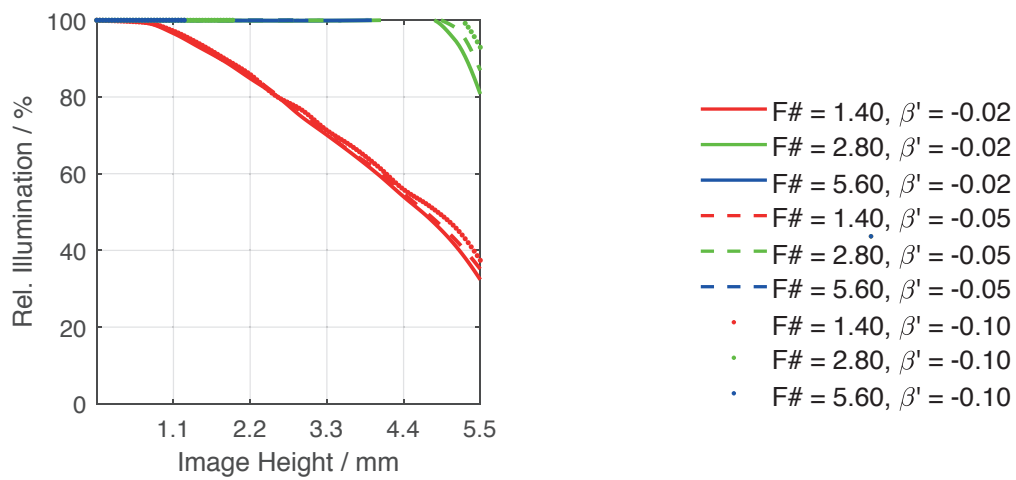

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

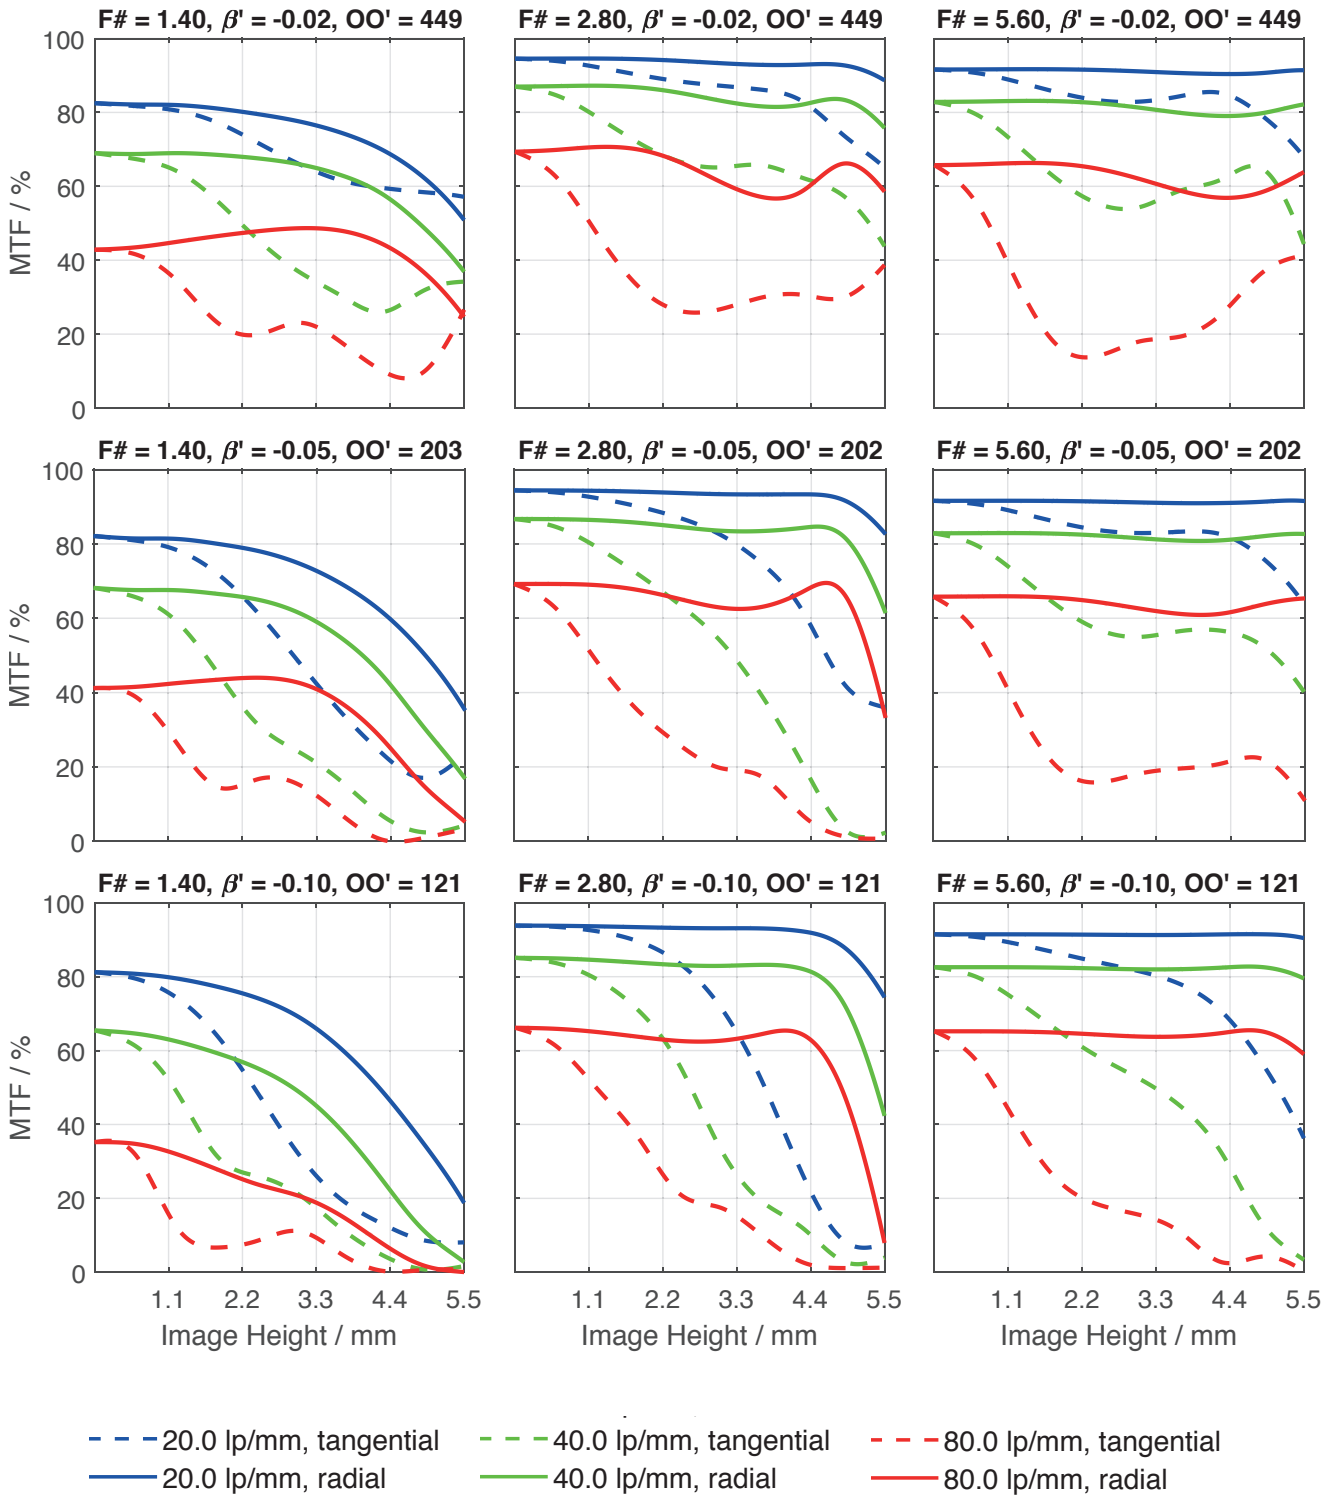

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170
✉ shawn.liu@schneider-asiapacific.com

North America


☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062
✉ thongv@schneiderkreuznach.com

Compact 12 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this lens is ideal for challenging mapping solutions.

The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed. As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered. Another option is the High-end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 6 mm, 8 mm, 17 mm, 23 mm and 35 mm.

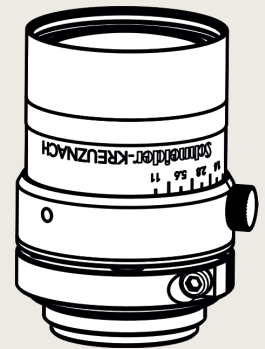

Cinegon 1.4/12

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated inspection
- Quality control
- Robot vision
- Food and beverage check
- Mapping


Name	Cinegon 1.4/12
Type	-0906 -0936 -1906 -0908
Focal Length [mm]	12
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	1.4 ... 11
NA	0.36
Interface	C-Mount
Working distance [mm]	614
AoV [°]	47
Focus control	manual
Transmission	400 - 1000 nm
Filter thread [mm]	M30.5 x 0.5
Dimensions L x D [mm]	48.5 x 34.0

Name	Cinegon 1.4/12
Weight [g]	99
Storage temperature [°C]	-25 ... +70
f'_{eff} [mm]	12.65
S_F [mm]	20.13
$S'_{F'}$ [mm]	12.65
HH' [mm]	13.47
β'_P	3.729
S_{EP} [mm]	23.52
S'_{AP} [mm]	-34.49
Σd [mm]	46.25
ID	1001951
ID Ruggedized	1062859
ID Motorized p-iris	1061450
ID High-end 3D	1070118

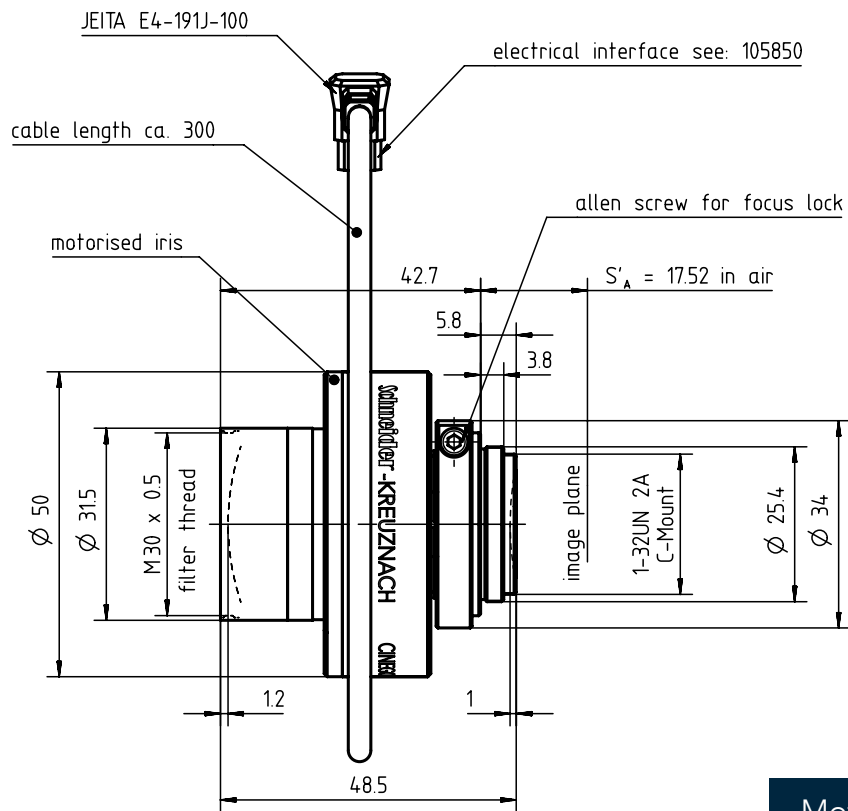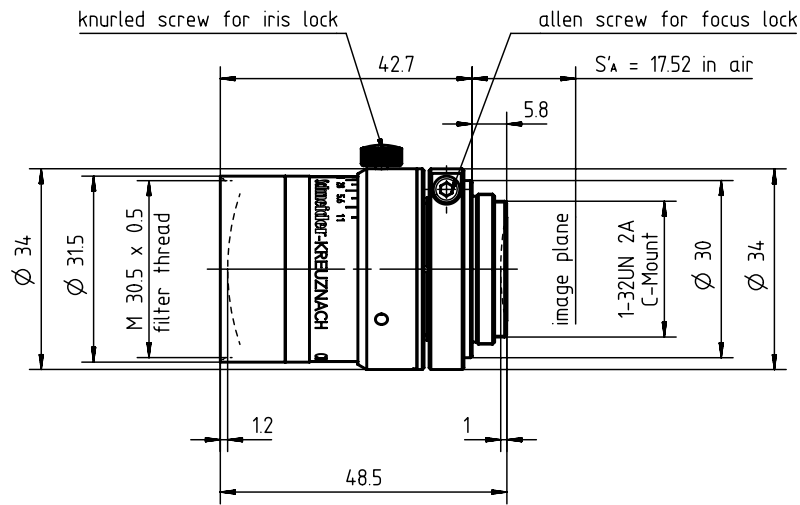


Motorized p-iris


Distortion vs. Image Height

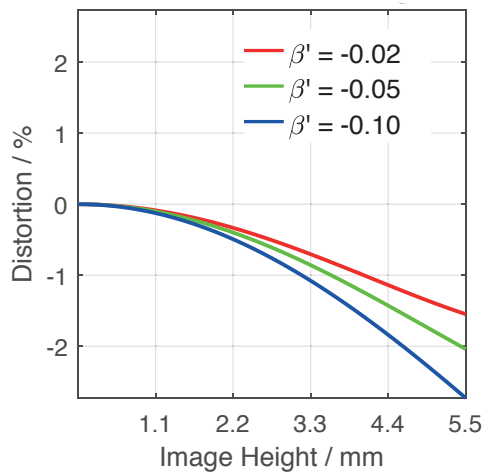


Transmittance vs. Wavelength

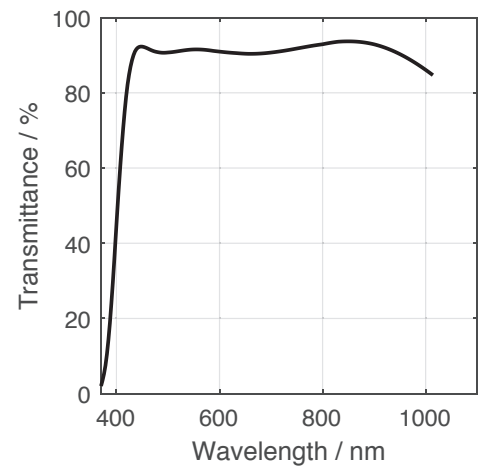

Relative Illumination vs. Image Height

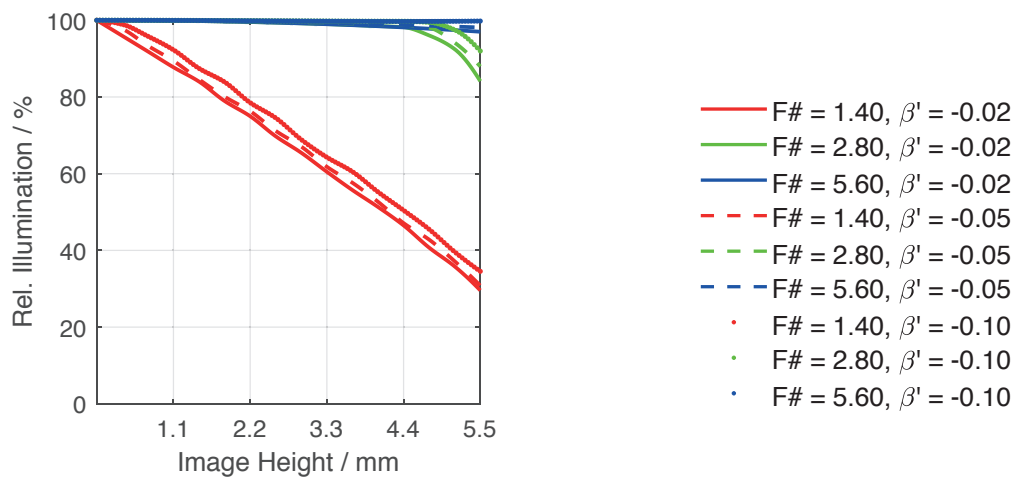

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

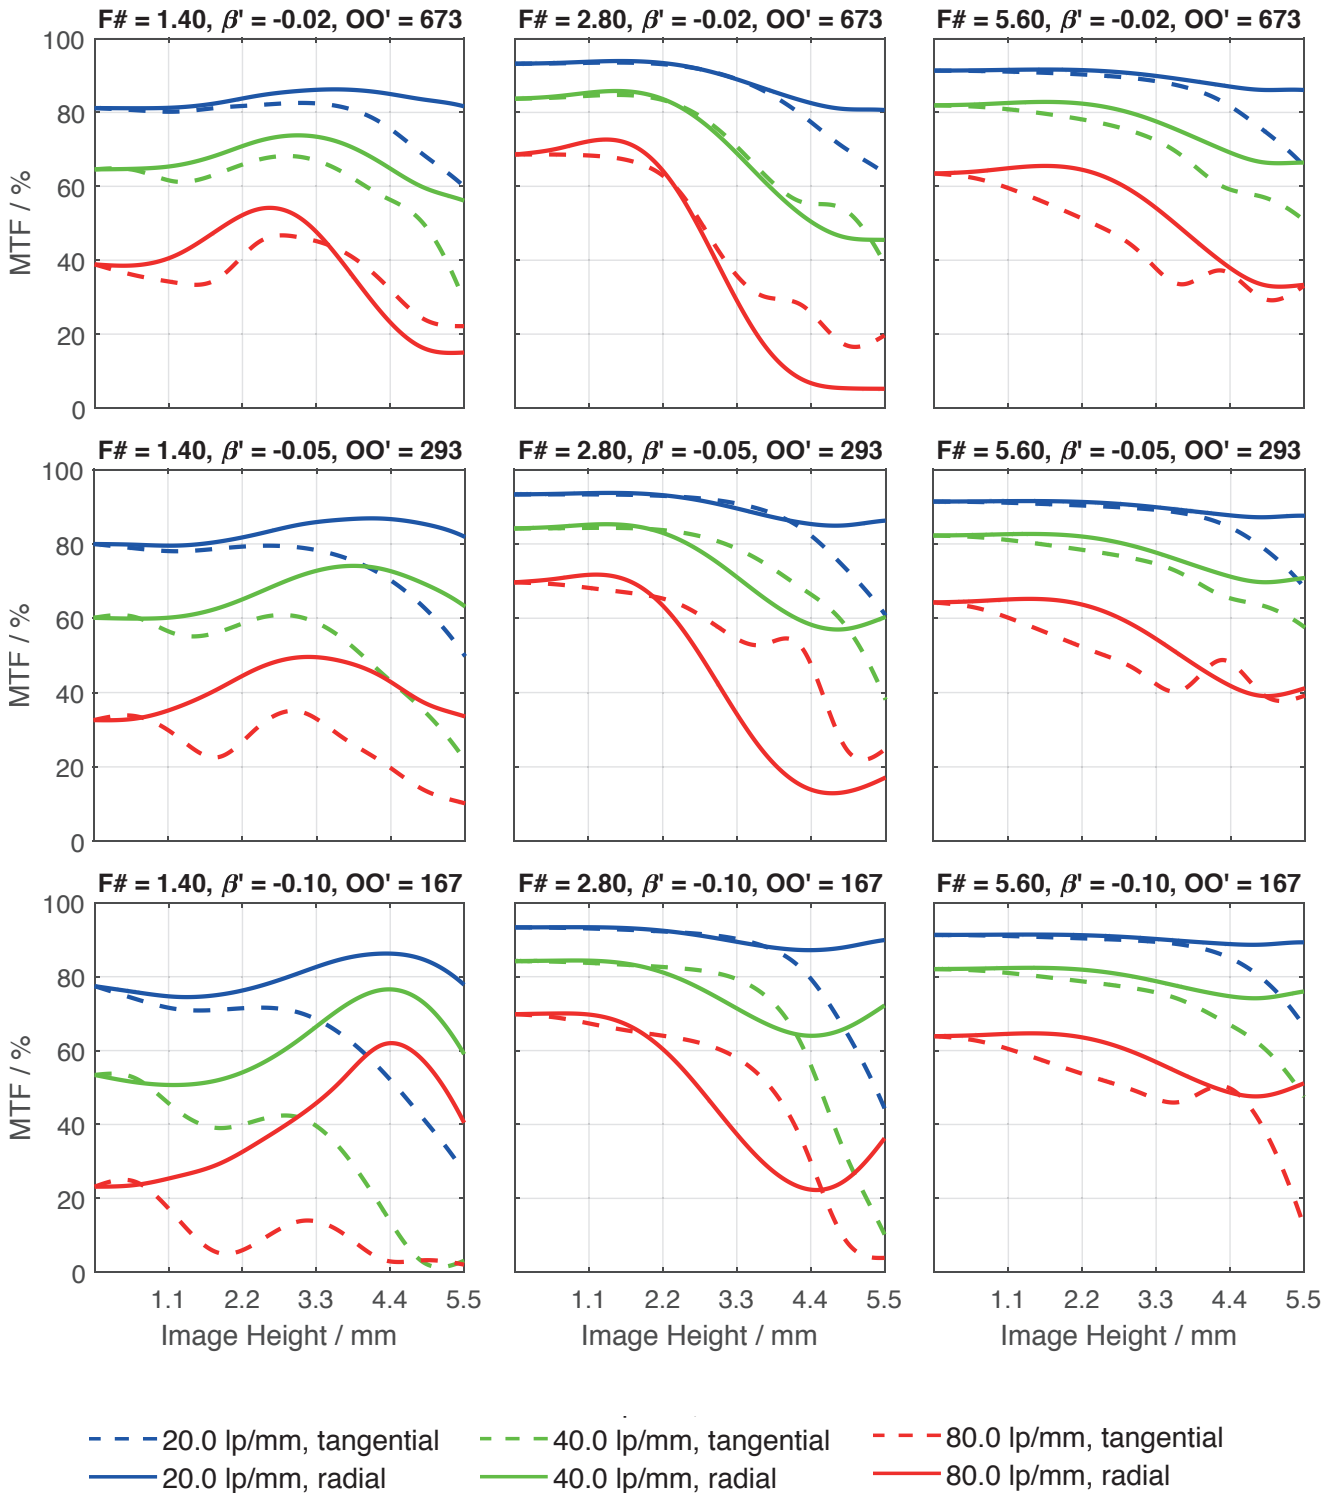

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170
✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062
✉ thongv@schneiderkreuznach.com

Compact 17 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this lens is ideal for challenging mapping solutions. The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed. As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered.

Another option is the High-end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 6 mm, 8 mm, 12 mm, 23 mm and 35 mm.



Xenoplan 1.4/17

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Xenoplan 1.4/17
Type	-0903 -0913 -1903 -0909
Focal Length [mm]	17
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	1.4 ... 11
NA	0.36
Interface	C-Mount
Working distance [mm]	∞ - 160
AoV [°]	34
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M30.5 x 0.5
Dimensions L x D [mm]	37.8 x 34.0

Name	Xenoplan 1.4/17
Weight [g]	85
Storage temp. [°C]	-25 ... +70
f'_{eff} [mm]	17.57
S_F [mm]	6.15
$S'_{F'}$ [mm]	13.16
HH' [mm]	-3.20
β'_p	2.978
S_{EP} [mm]	12.05
S'_{AP} [mm]	-39.16
Σd [mm]	24.93
ID	1001957
ID Ruggedized	1062860
ID Motorized p-iris	1061451
ID High-end 3D	1070117

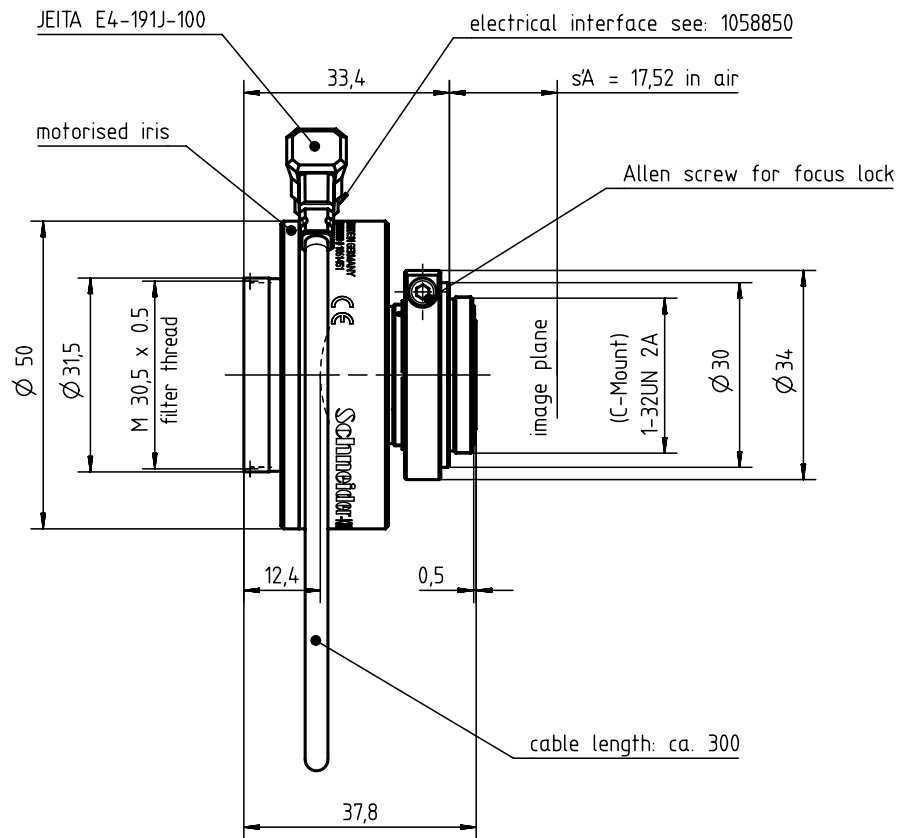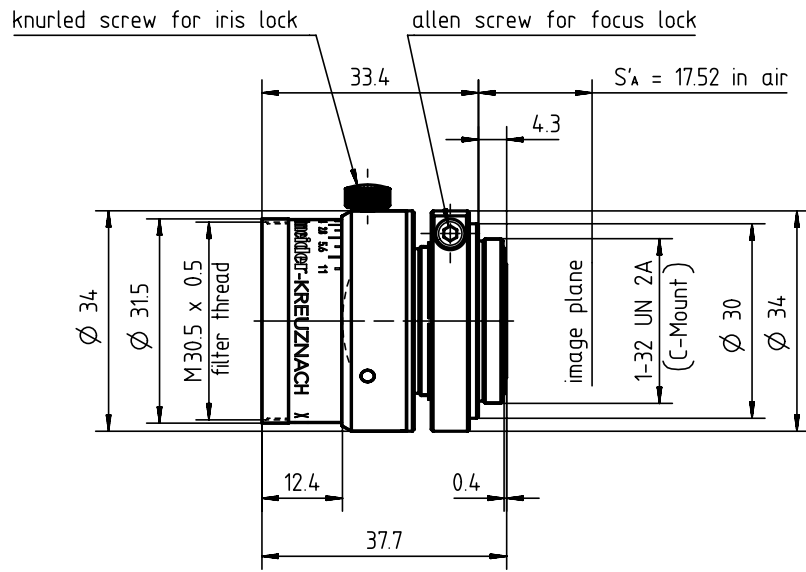


Motorized p-iris


Distortion vs. Image Height

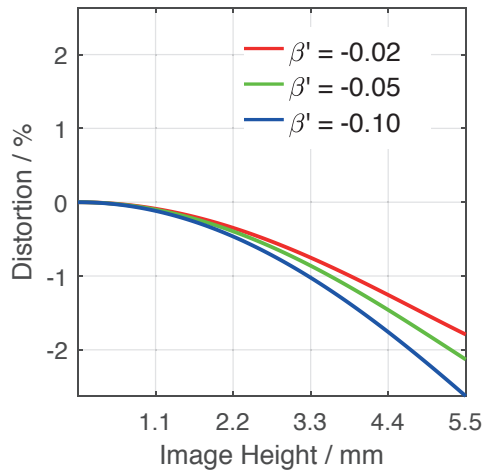


Transmittance vs. Wavelength

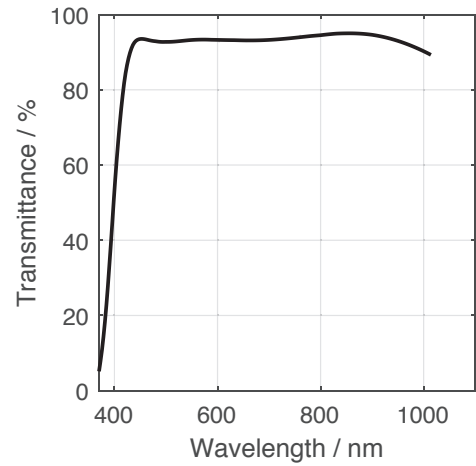

Relative Illumination vs. Image Height

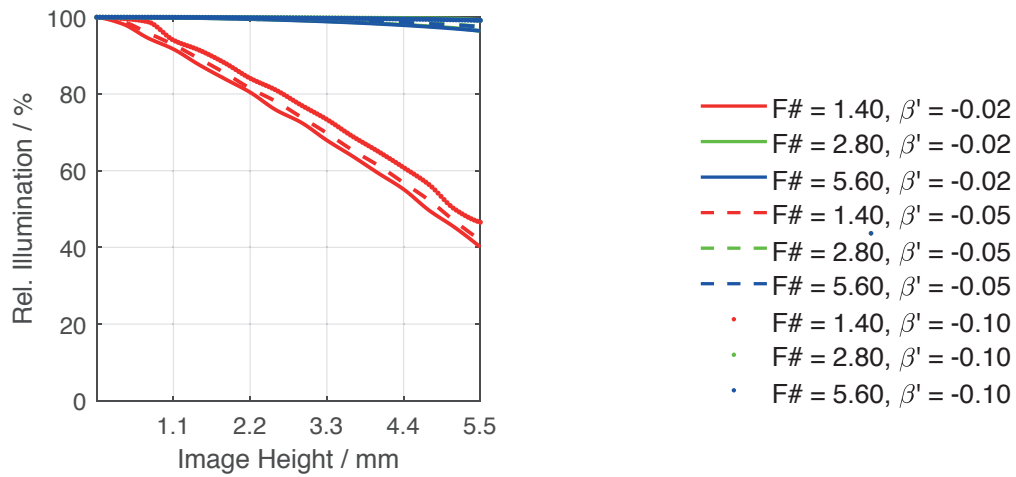

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

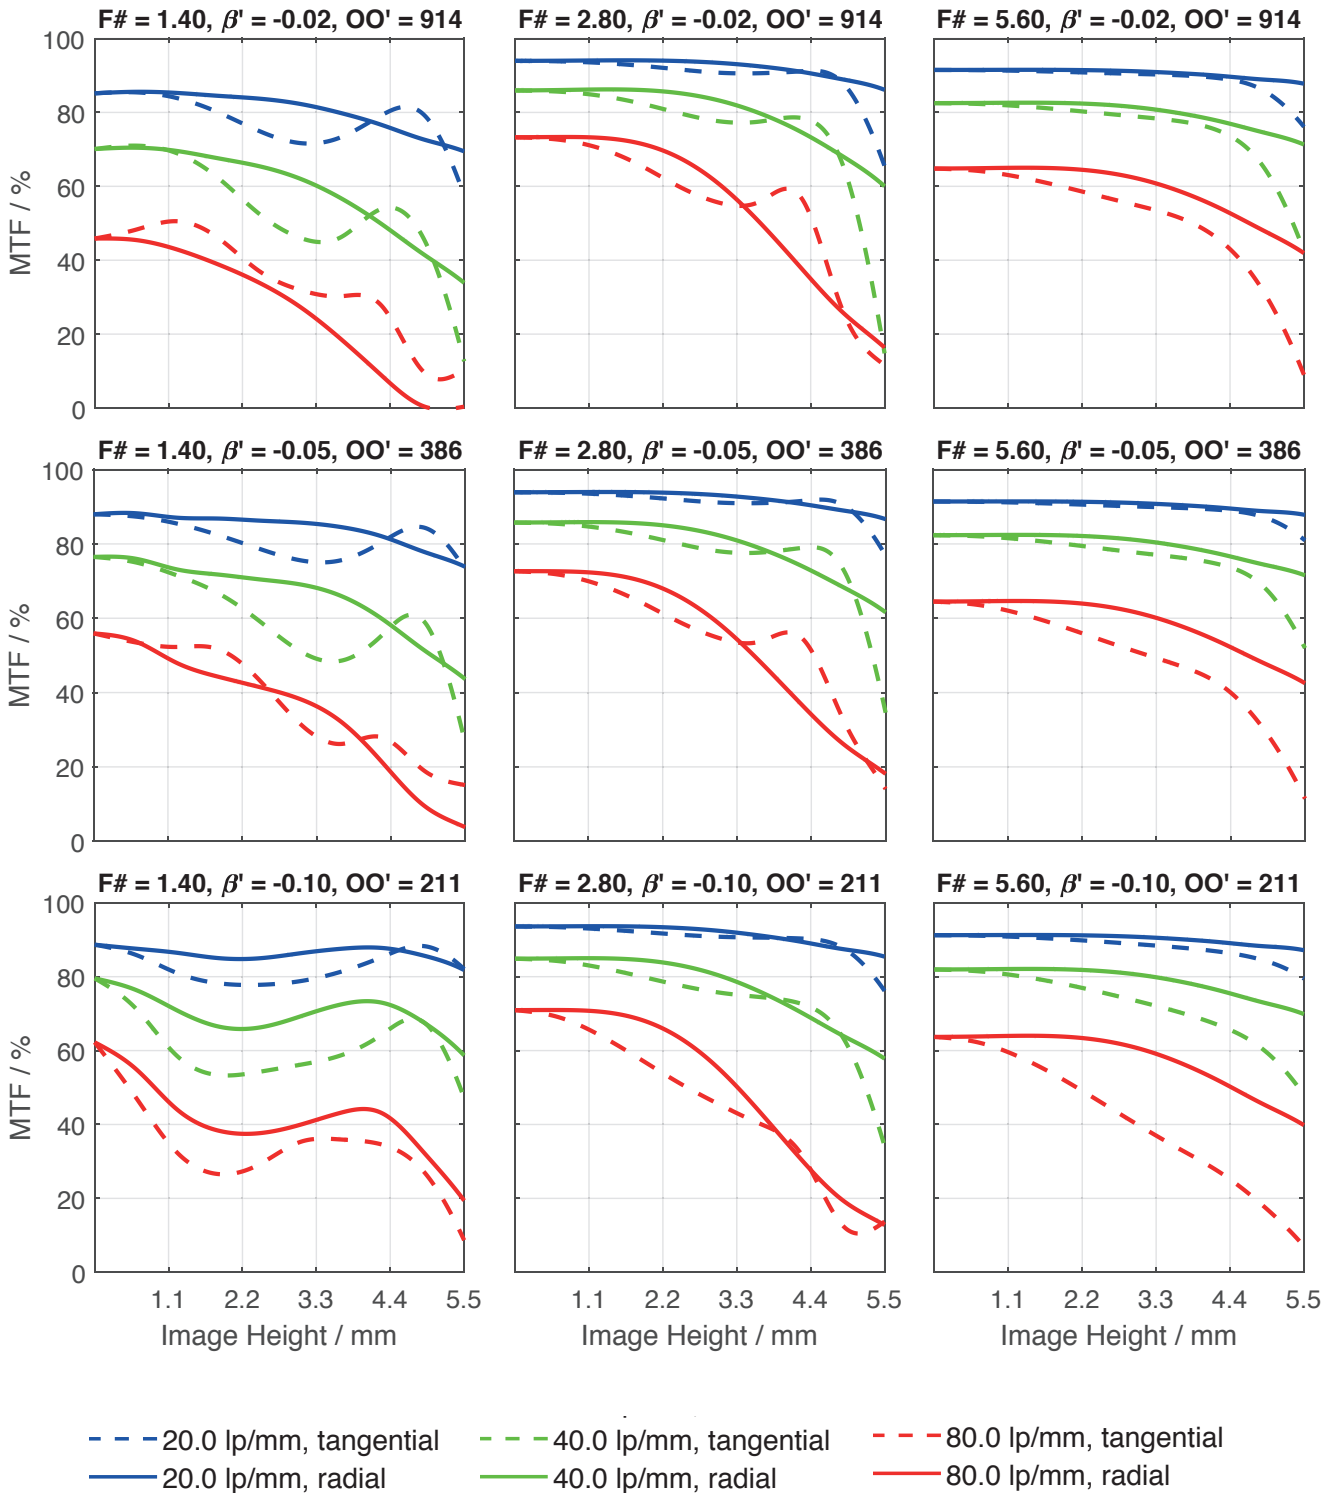

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH

Ringstraße 132

55543 Bad Kreuznach

☎ +49 671 601 205

✉ cs@schneiderkreuznach.com

www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170

✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)

☎ +1 800 228 1254 (West Coast)

✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062

✉ thongv@schneiderkreuznach.com

Compact 35 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this lens is ideal for challenging mapping solutions.

The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed. As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered. Another option is the High-end 3D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 6 mm, 8 mm, 12 mm, 17 mm and 23 mm.



Xenoplan 1.9/35

Key features



- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Xenoplan 1.9/35
Type	-0901 -0931 -1908
Focal Length [mm]	35
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	1.9 ... 16
NA	0.26
Interface	C-Mount
Working distance [mm]	∞ - 358
AoV [°]	17
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M30.5 x 0.5
Dimensions L x D [mm]	38.5 x 34.0

Name	Xenoplan 1.9/35
Weight [g]	92
Storage temperature [°C]	-25 ... +70
f'_{eff} [mm]	34.92
S_F [mm]	-6.69
S'_F [mm]	17.03
HH' [mm]	-13.62
β'_P	0.909
S_{EP} [mm]	31.73
S'_{AP} [mm]	-14.72
Σd [mm]	32.51
ID	1001960
ID Ruggedized	1062872
ID Motorized p-iris	1061453

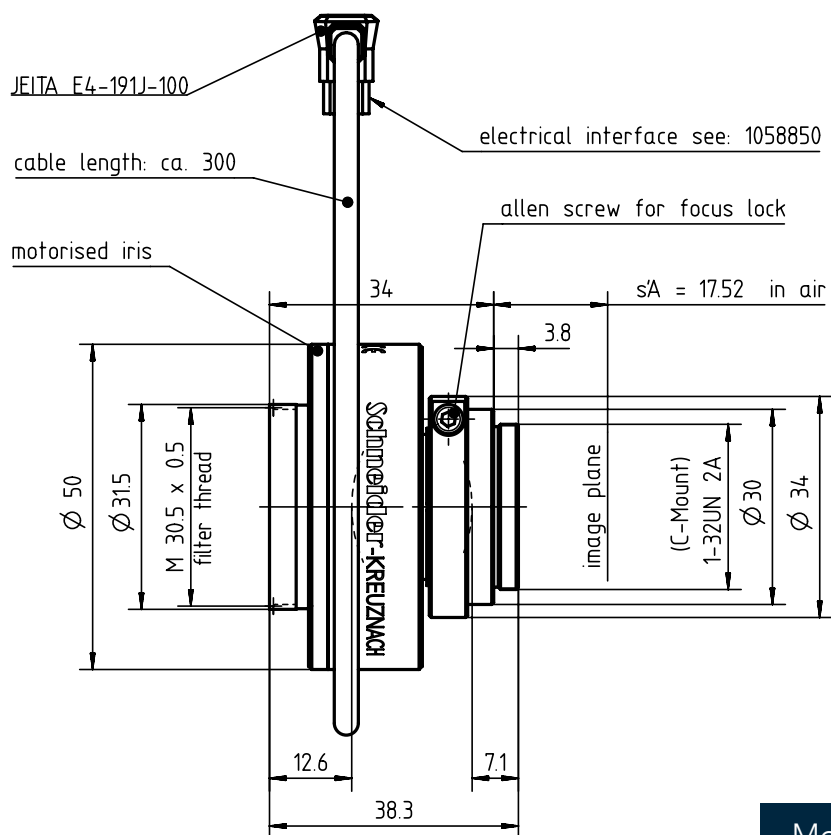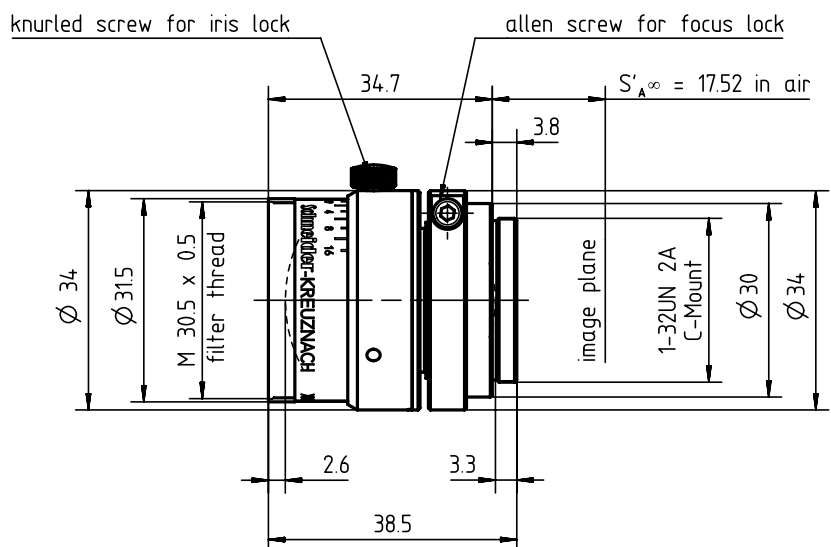


Motorized p-iris


Distortion vs. Image Height

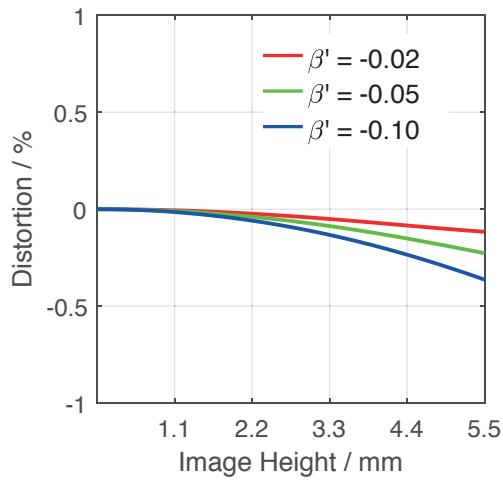


Transmittance vs. Wavelength

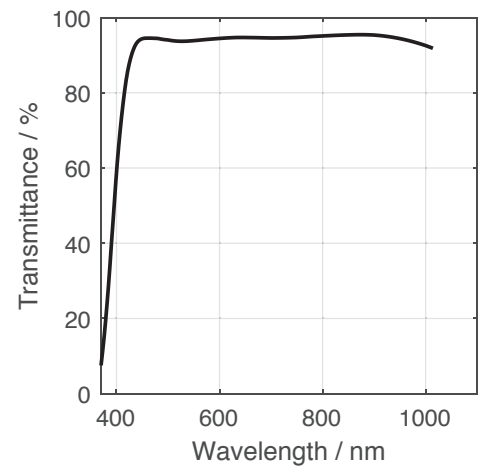

Relative Illumination vs. Image Height

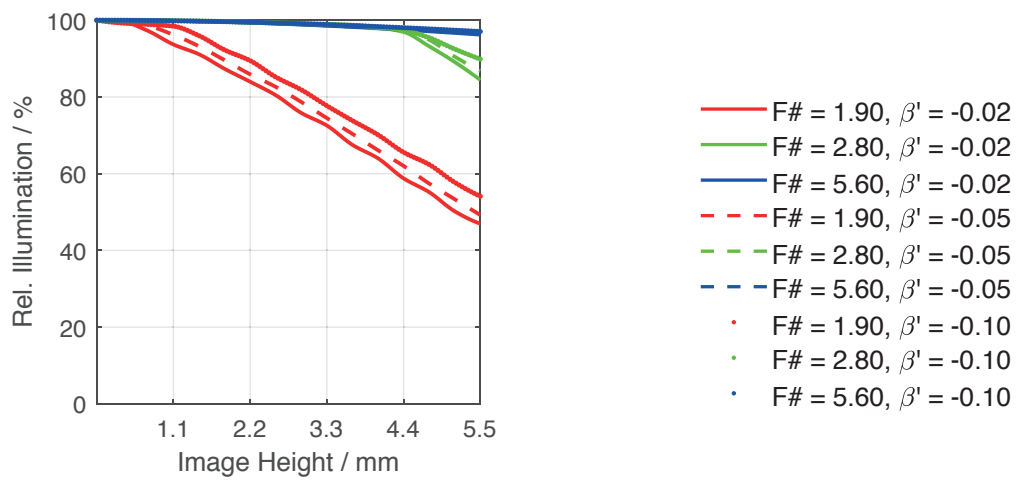

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

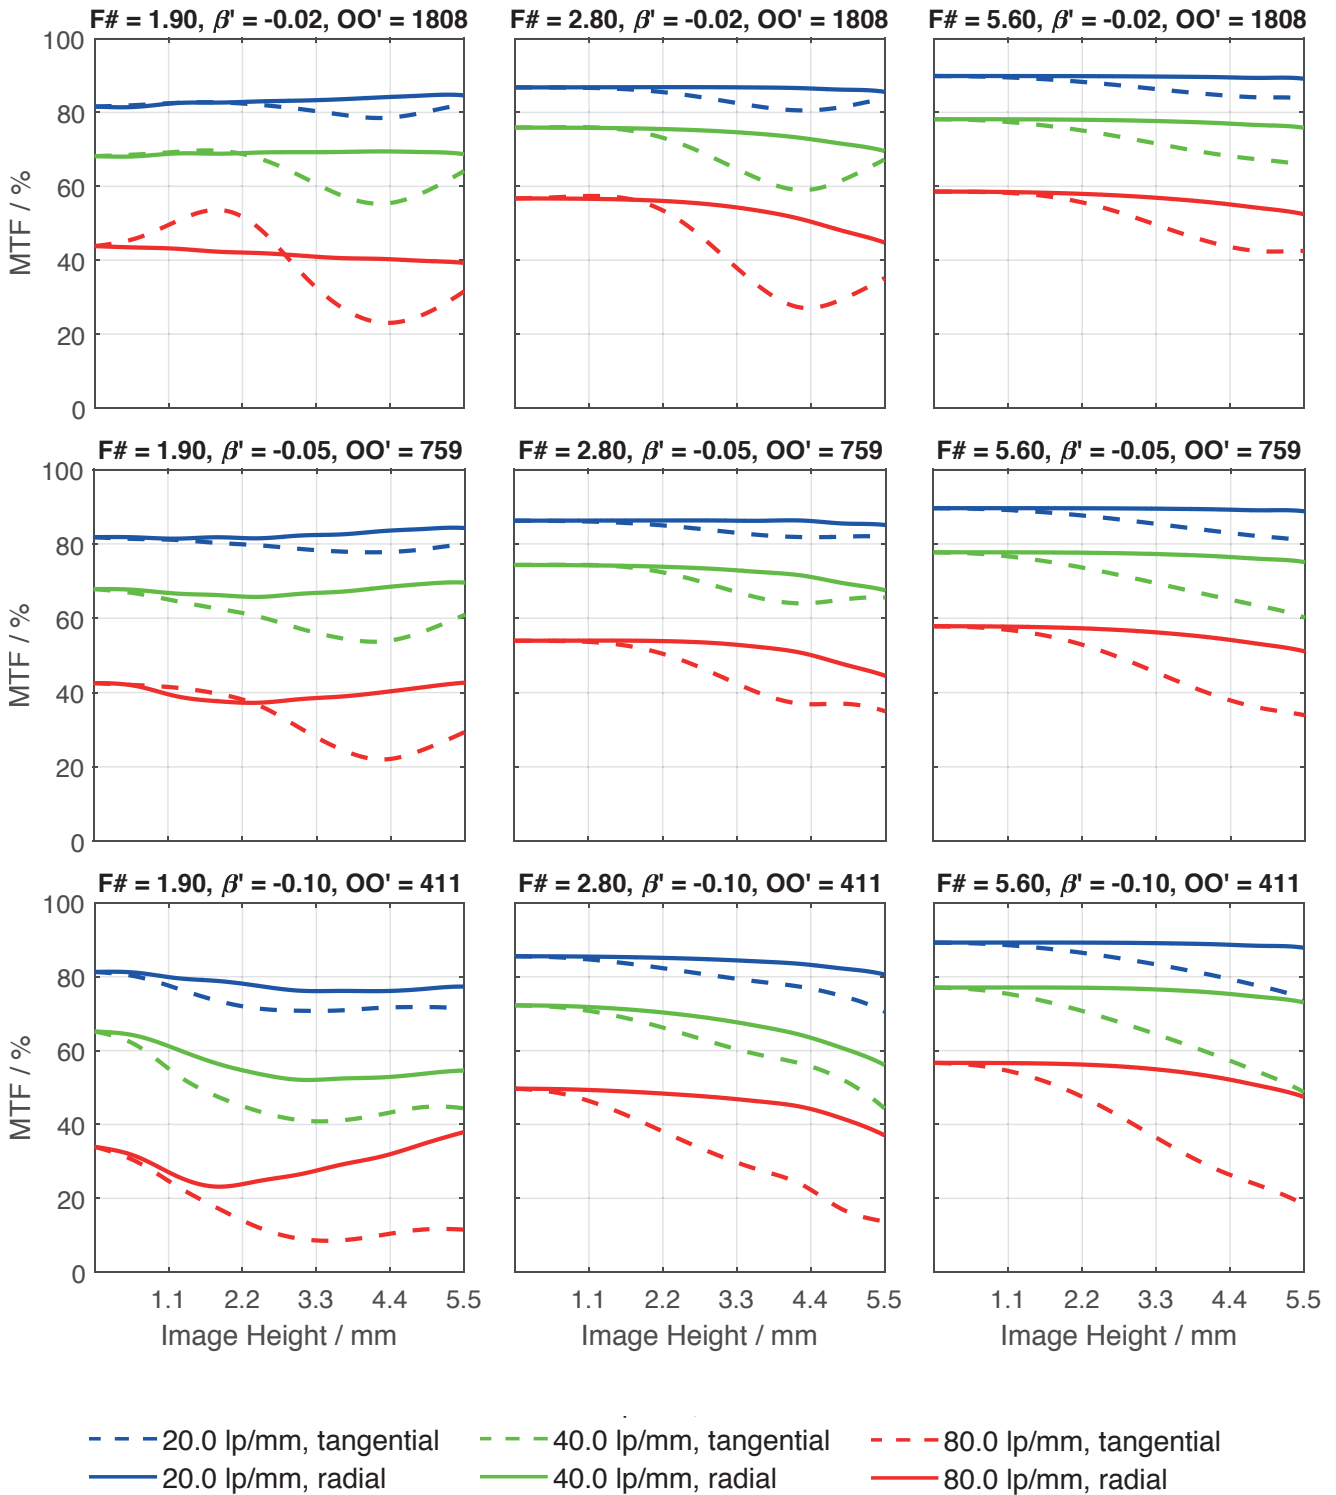

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170
✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062
✉ thongv@schneiderkreuznach.com

Compact 23 mm focal length C-Mount lens for megapixel 2/3" sensors with the 400 nm - 1000 nm broadband AR-coating. Useable from VIS to NIR and featured low chromatic apparition, this lens is ideal for challenging mapping solutions.

The high imaging performance over the entire field, makes this lens suitable automated inspection systems when a large field of view and near working distance is needed. As ruggedized version with special locking of the mechanics to compensate industrial environment, such as machine vibration or for instants, is offered. Another option is the High-end 3 D version characterized by extra secured optics to assure that the set optical parameters remain in place, needed when the lens get mounted on a robot. And a motorized p-iris version for use in automated inspection systems is available as well. More available focal length are 4.8 mm, 6 mm, 8 mm, 12 mm, 17 mm and 35 mm.



Xenoplan 1.4/23

Key features


- For 2/3" sensors up to 5 megapixel
- 400 nm to 1000 nm Broadband AR coating
- Ruggedized version available
- High-end 3D version available
- Motorized p-iris available

Applications

- Automated Inspection
- Quality control
- Robot vision
- Food and Beverage check
- Mapping


Name	Xenoplan 1.4/23
Type	-0902 -0942 -1902
Focal Length [mm]	23
Magnification	-0.1
Image circle [mm]	11
Resolution [μm]	3.65
F/# range	1.4 ... 11
NA	0.36
Interface	C-Mount
Working distance [mm]	∞ - 211
AoV [°]	27
Focus control	manual
Transmission [nm]	400 - 1000
Filter thread [mm]	M30.5 x 0.5
Dimensions L x D [mm]	40.4 x 34.0

Name	Xenoplan 1.4/23
Weight [g]	95
Storage temperature [°C]	-25 ... +70
f'_{eff} [mm]	22.52
S_F [mm]	10.23
$S'_{F'}$ [mm]	14.95
HH' [mm]	-9.41
β'_P	2.270
S_{EP} [mm]	20.16
S'_{AP} [mm]	-36.18
Σd [mm]	30.93
ID	1001917
ID Ruggedized	1062871
ID Motorized p-iris	1061452

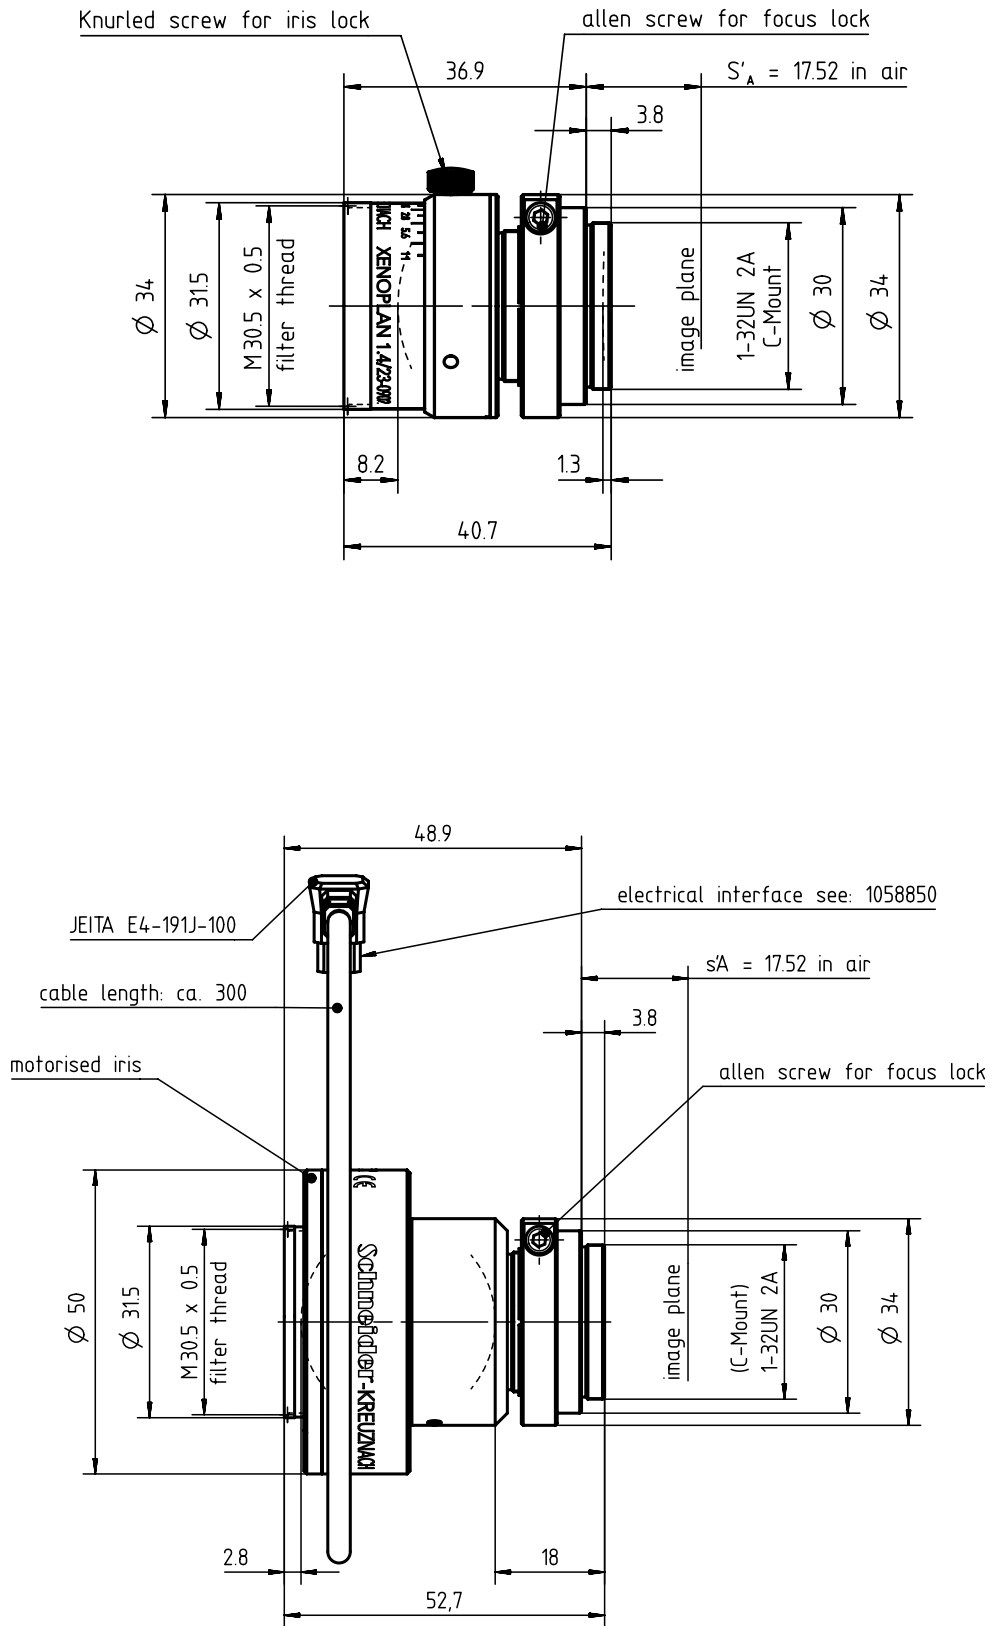


Motorized p-iris


Distortion vs. Image Height

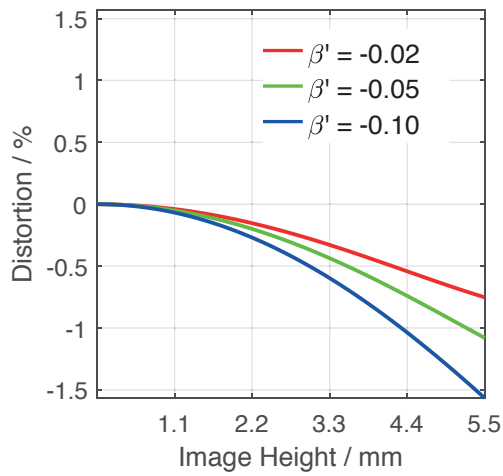


Transmittance vs. Wavelength

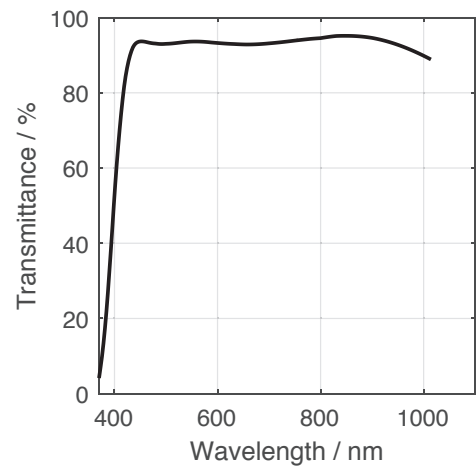

Relative Illumination vs. Image Height

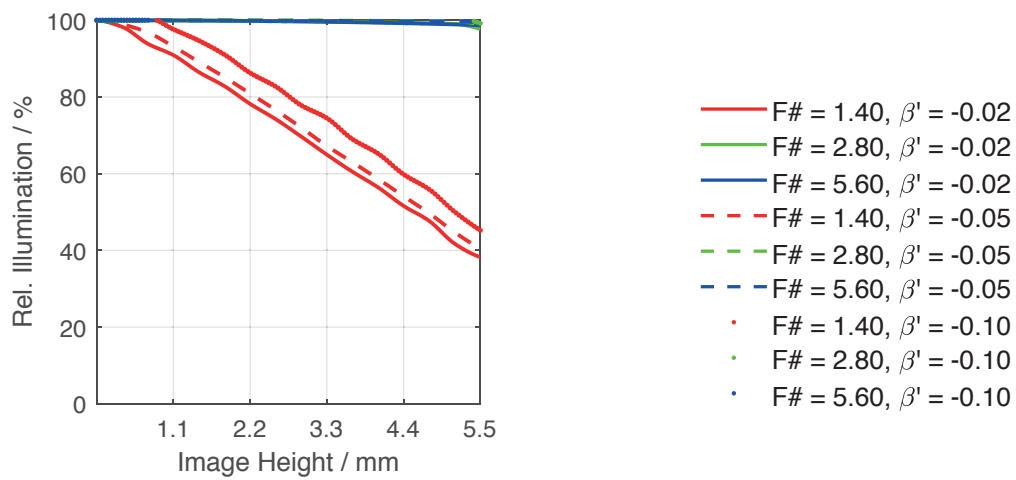

Spectrum Name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Weights	8	16	23	22	19	13

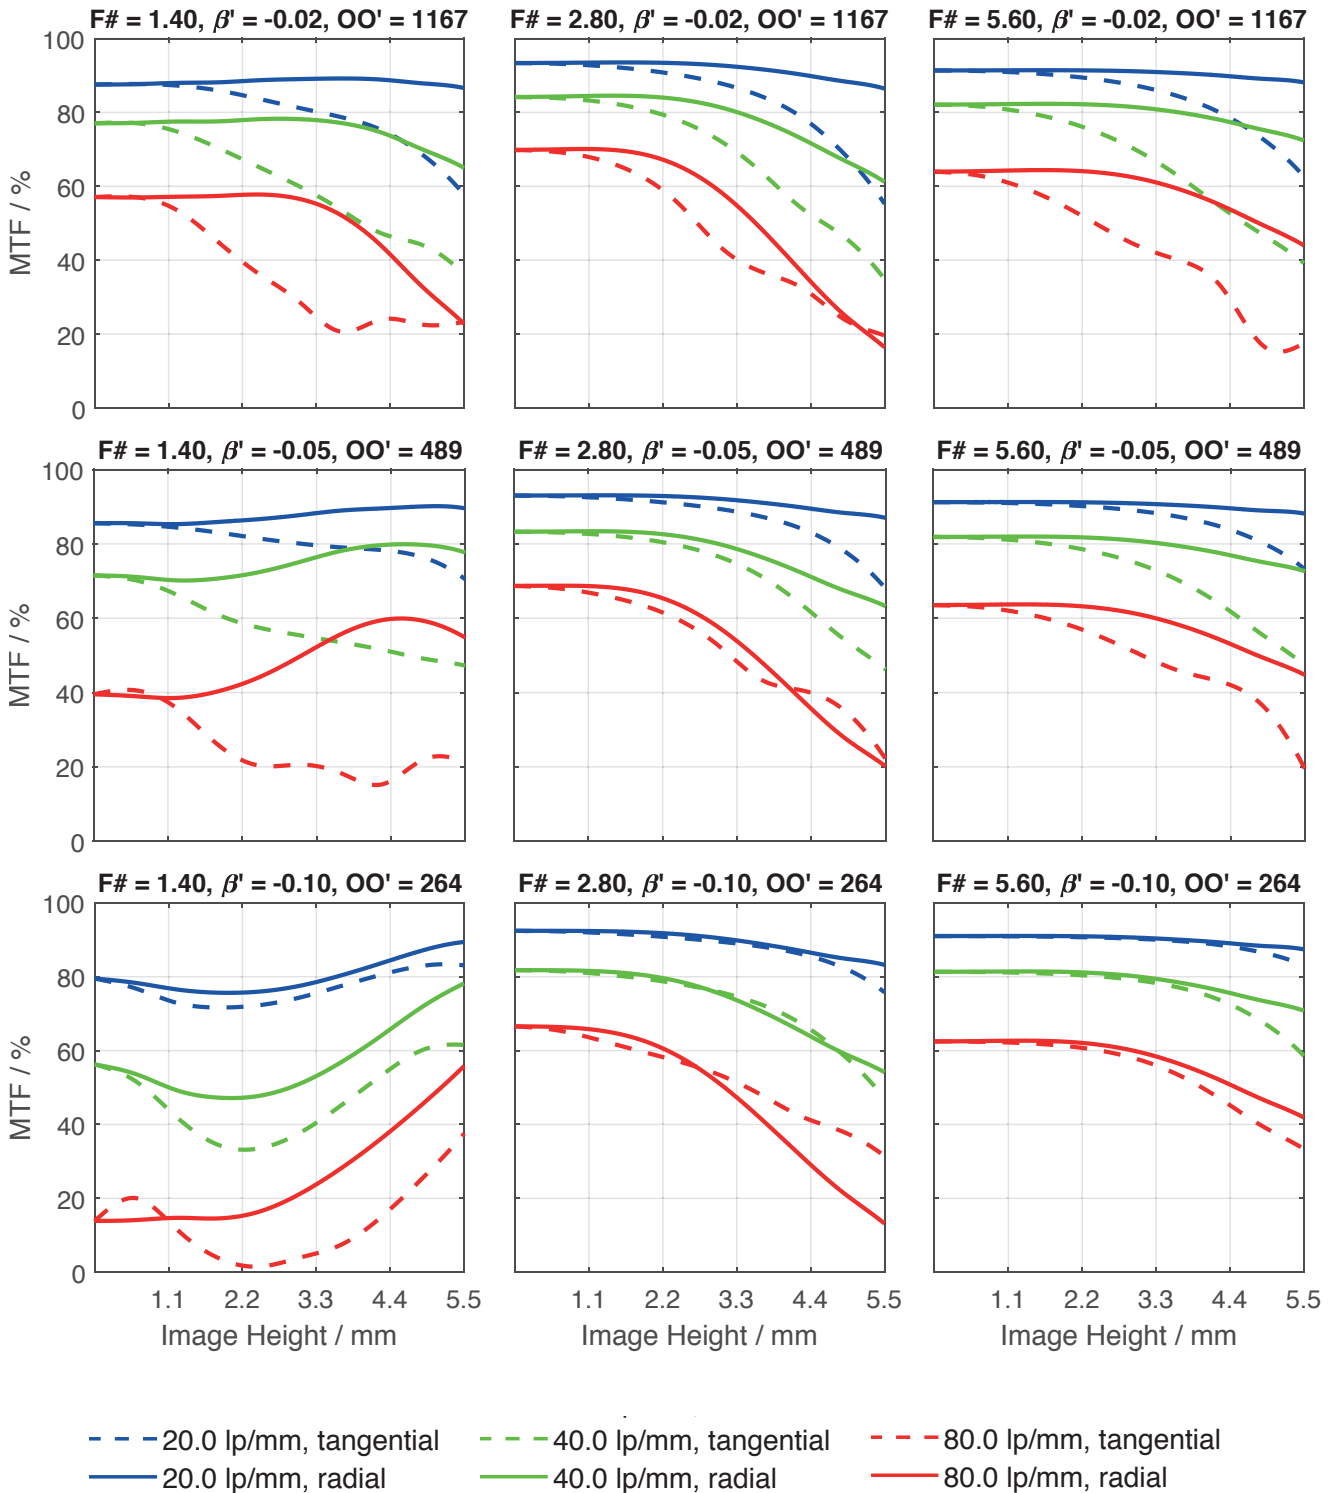

Accessories	Mount	Length	ID
Adapter	CS-Mount Adapter	5 mm	25081
	C-Mount / M42 x 1 Adapter	-	1075817
Ext. Tube	C-Mount	5 mm	39316
	C-Mount	8 mm	39315
	C-Mount	10 mm	39312

Get more information

Contact our local offices



Headquarter Germany

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

China

☎ +86 755 8832 1170
✉ shawn.liu@schneider-asiapacific.com

North America

☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Singapore

☎ +65 9488 0062
✉ thongv@schneiderkreuznach.com