


Dual Bandpass VIS-85

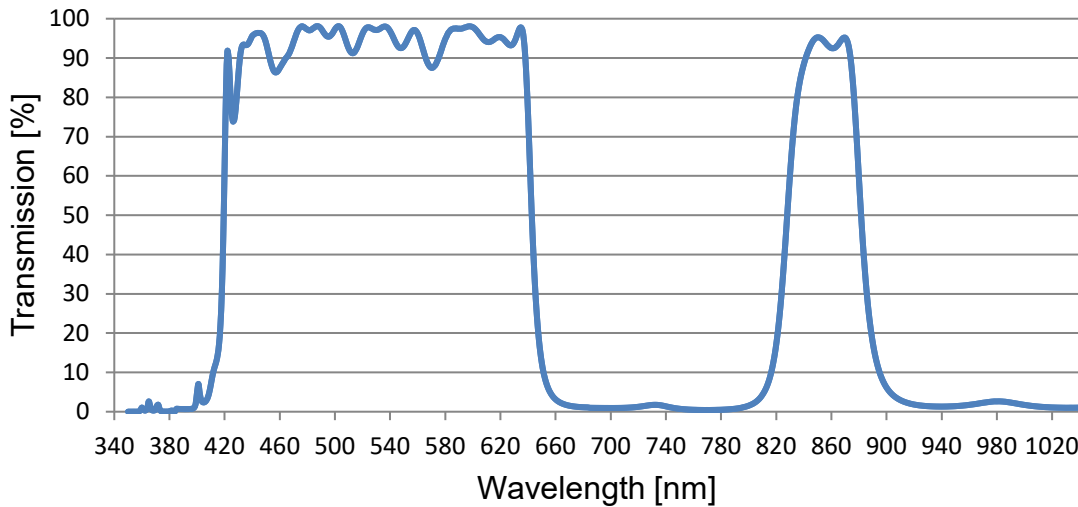

Technical Specifications

Specification according to ISO 10110

| | |
|--------------------|--|
| Transmittance band | 440 nm – 640 nm and 840 nm – 870 nm |
| Peak transmittance | > 95 % |
| Blocking | T < 0,5 % for 685 nm – 770 nm and T < 1 % for 920 – 980 nm |
| Thickness | 1.0 mm ± 0.2 mm or 2.0 mm ± 0.2 mm |

| unmounted | filter glass | ID | | mounted | filter | ID |
|-----------|-----------------|------------------|------------------|----------|--------------------|----|
| | | [2 mm thickness] | [1 mm thickness] | | | |
| 19 mm | IFG VIS-85 19,0 | | | CMT | IF VIS-85 CMT | |
| 27 mm | IFG VIS-85 27,0 | 1087221 | | SH 25.5 | IF VIS-85 SH 25.5 | |
| 34 mm | IFG VIS-85 34,0 | | 1095262 | SH 27.0 | IF VIS-85 SH 27.0 | |
| 40 mm | IFG VIS-85 40,0 | | | SN1 30.5 | IF VIS-85 SN1 30.5 | |
| 43 mm | IFG VIS-85 43,0 | | | SH 35.5 | IF VIS-85 SH 35.5 | |
| 55 mm | IFG VIS-85 55,0 | | | SH 37.0 | IF VIS-85 SH 37.0 | |
| 64 mm | IFG VIS-85 64,0 | | | SH 40.5 | IF VIS-85 SH 40.5 | |
| | | | | SH 43.0 | IF VIS-85 SH 43.0 | |
| | | | | SH 46.0 | IF VIS-85 SH 46.0 | |
| | | | | SH 49.0 | IF VIS-85 SH 49.0 | |
| | | | | SH 52.0 | IF VIS-85 SH 52.0 | |
| | | | | SH 55.0 | IF VIS-85 SH 55.0 | |
| | | | | SH 62.0 | IF VIS-85 SH 62.0 | |
| | | | | SH 67.0 | IF VIS-85 SH 67.0 | |

Also available as Sensor Cover Glass 16 mm diameter, 1 mm thin IFG VIS-85 16,0 1 ID 1075447

Contact

Headquartes Europe

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
Germany

+49 671 601-205
cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices America

+1 800 645 7239 (East Coast)
+1 800 228 1254 (West Coast)
info@schneideroptics.com
www.schneiderkreuznach.com

Office Asia

+86 755 8832 1170
info@schneider-asiapacific.com
www.schneiderkreuznach.com

Office Singapore

+65 9488 0062
thongv@schneiderkreuznach.com
www.schneiderkreuznach.com