


LC300 Linear Light

LOW-COST

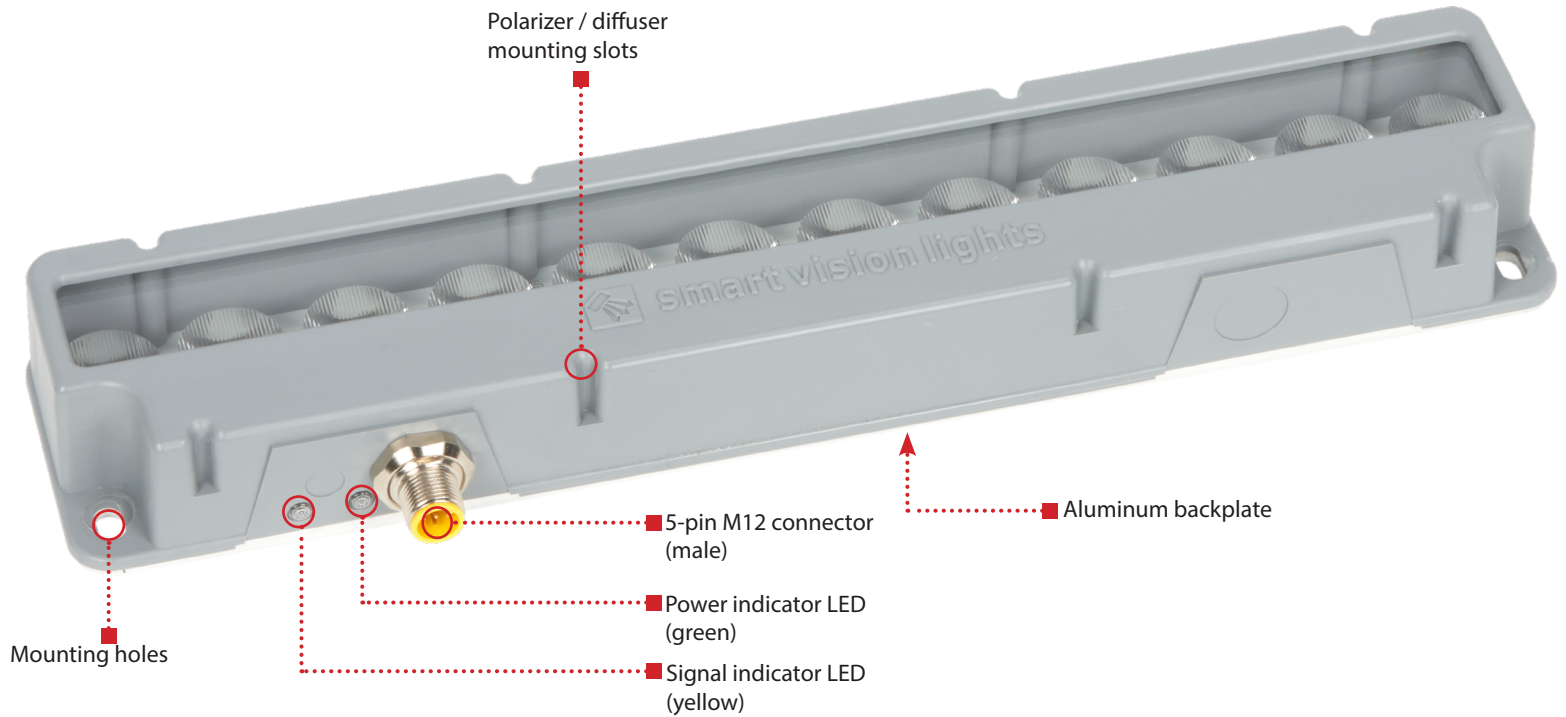

The LC300 is a low cost linear light featuring an integrated constant current driver with a lux value of up to 54,000. NPN or PNP triggers can be used to control the light for either strobed or continuous operation.

LC300 HIGHLIGHTS

Warranty 10 YEAR	Tested IEC 62471	Compliant CE ROHS	Rated IP 50	Connector 5-PIN M12
--------------------------------	--------------------------------	---------------------------------	---------------------------	-----------------------------------

- ✓ High-impact injection molded housing
- ✓ Built-in status indicators
- ✓ Lowest profile full-sized linear light


SPECIFICATIONS

Electrical Input	24 VDC +/- 5%
Input Current	Max. 700 mA
Input Power	Max. 17 W
PNP Trigger	2.8 mA @ 4VDC 8.8 mA @ 12VDC 17.6 mA @ 24VDC
NPN Trigger	14.4 mA @ Common (0VDC)
Trigger Input	PNP > +4 VDC (24 VDC max.) to activate or NPN ≥ GND <1VDC to activate (not both)
Strobe Duration	Min. 1 μs Max. ∞
Power Indicator	Turns green when powered up
Status Indicators	Strobe indicator will turn yellow when on
Connection	5-pin M12 connector
Operating Temperature	-10° to 40° C (14° to 104° F) RH max 80% non-condensing humidity
Storage Temperature	-20° to 70° C (-4° to 158° F) RH max 80% non-condensing humidity
IP Rating	IP50
Weight	~370 g
Compliances	CE, IEC 62471, RoHS
Warranty	10 years*

*See SmartVisionLights.com/warranty for details

WIRING CONFIGURATION

CONTINUOUS OPERATION MODE



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	Intensity Control	1-10VDC	GREY

For maximum intensity, tie pin 5 to pin 1 at +24VDC.

For continuous mode: PNP (pin 4) can be tied to +24 V DC (pin 1) **or** NPN (pin 2) can be tied to Ground (pin 3).

For proper light function, apply either a PNP or NPN signal, not both.


Failure to supply light with correct input current will result in inconsistent lighting behavior.

(see Product Specifications for requirements)

LENS OPTICS


NARROW (Standard)

Narrow, 16° angle-cone lenses are standard. Standard lenses create a narrow beam of illumination and are used for long working distances.




LINE

Line, with a 10° width and a 50° fan angle, projects a thin, narrow beam of illumination.



WIDE

Wide, 30° angle-cone lenses create a large area of illumination. They create a floodlight effect and can be used for short working distances.




LIGHTING PATTERNS


The LC300 is recommended to be used at a working distance between 300 mm to 2000 mm. Illuminance values taken on white light - 5700K

Standard (16°) lighting patterns

Illuminance -vs- Working Distance

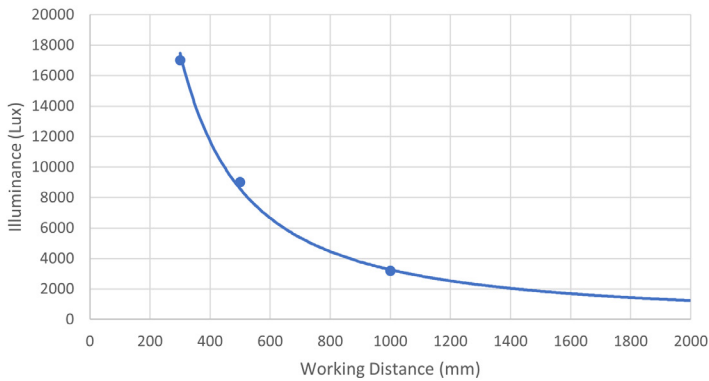


Beam Size at 80% Max Intensity -vs- Working Distance

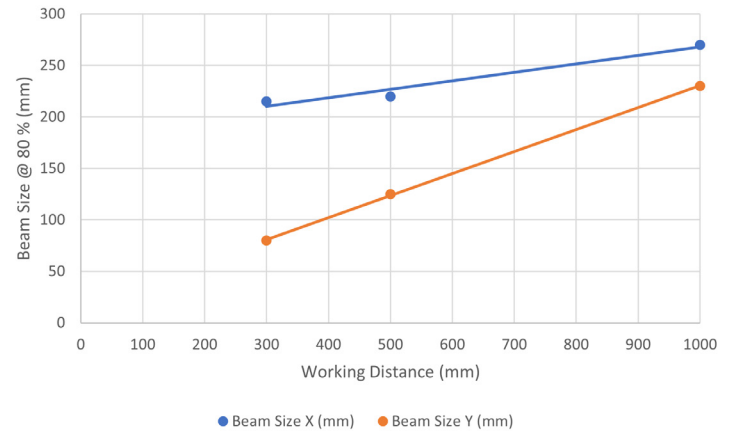


Wide (30°) lighting patterns

Illuminance -vs- Working Distance

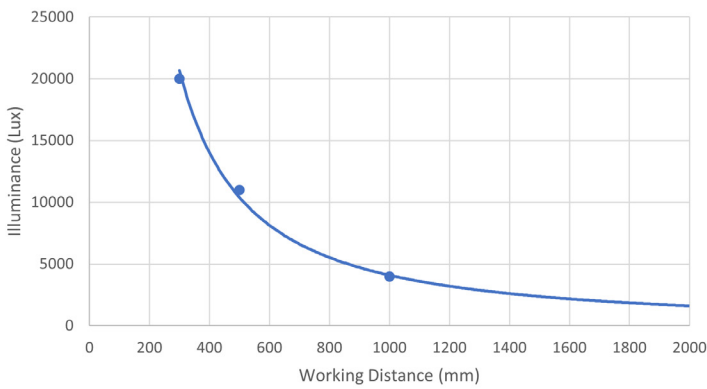


Beam Size at 80% Max Intensity -vs- Working Distance

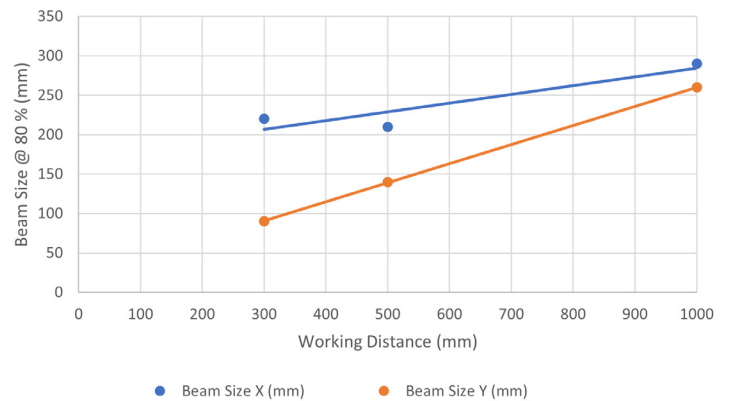


Line (10° x 50°) lighting patterns

Illuminance -vs- Working Distance

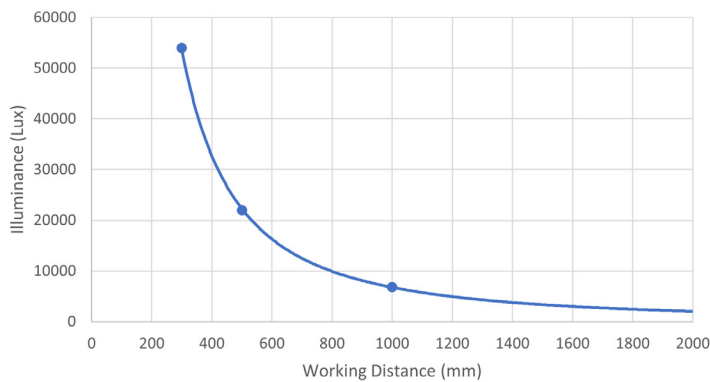

Beam Size at 80% Max Intensity -vs- Working Distance

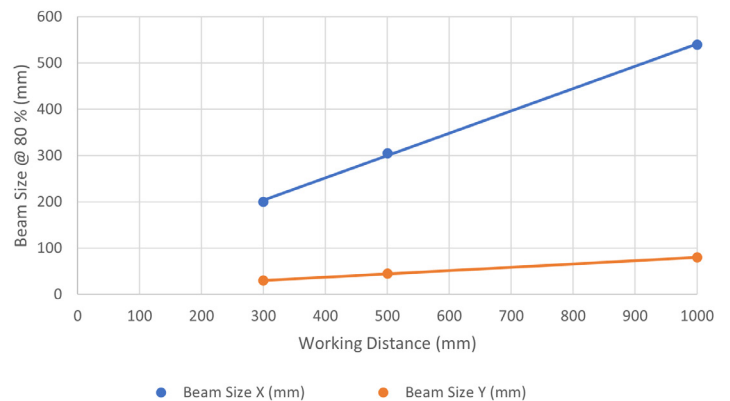


BEAM PATTERNS

The LC300 is recommended to be used at a working distance between 300 mm to 2000 mm. Illuminance values taken on white light - 5700K


Standard (16°) beam patterns

Grid set to 75 mm

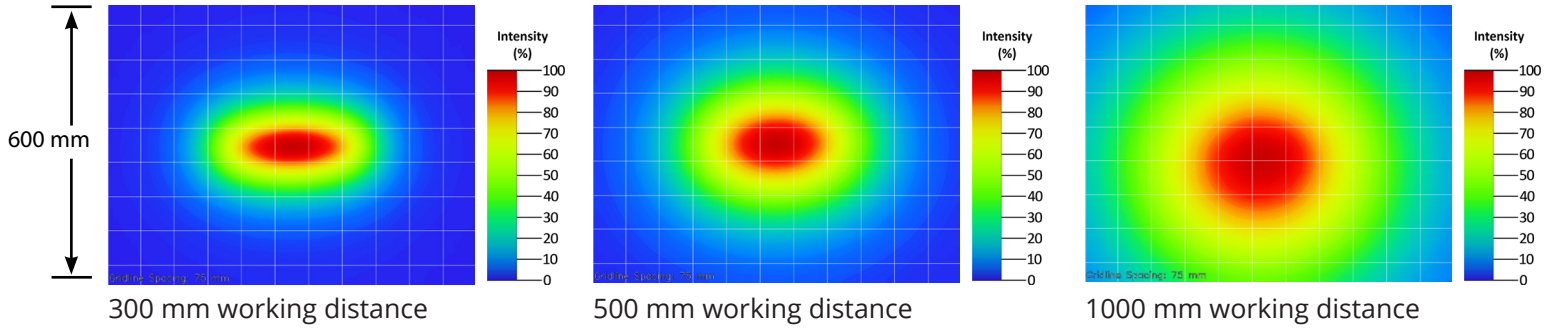


Wide (30°) beam patterns

Grid set to 75 mm

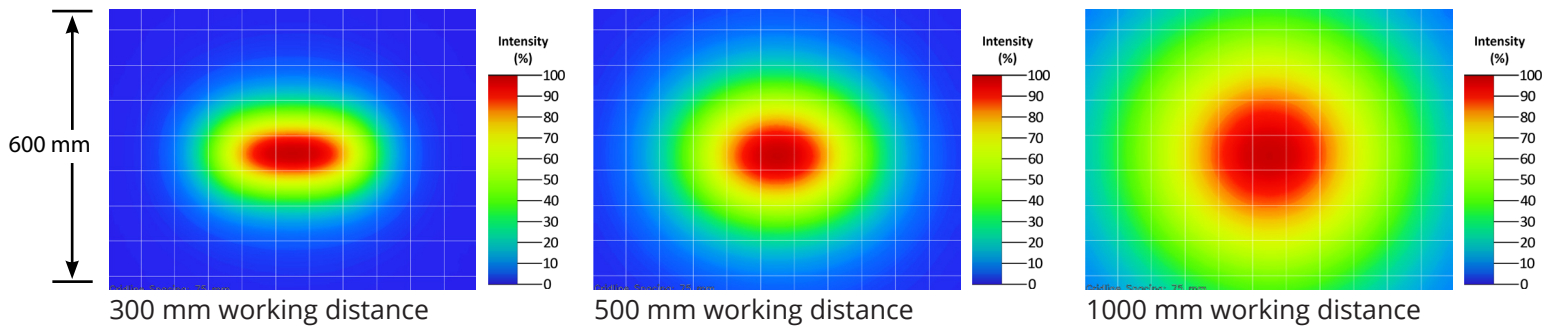

Line (10° x 50°) beam patterns

Grid set to 75 mm

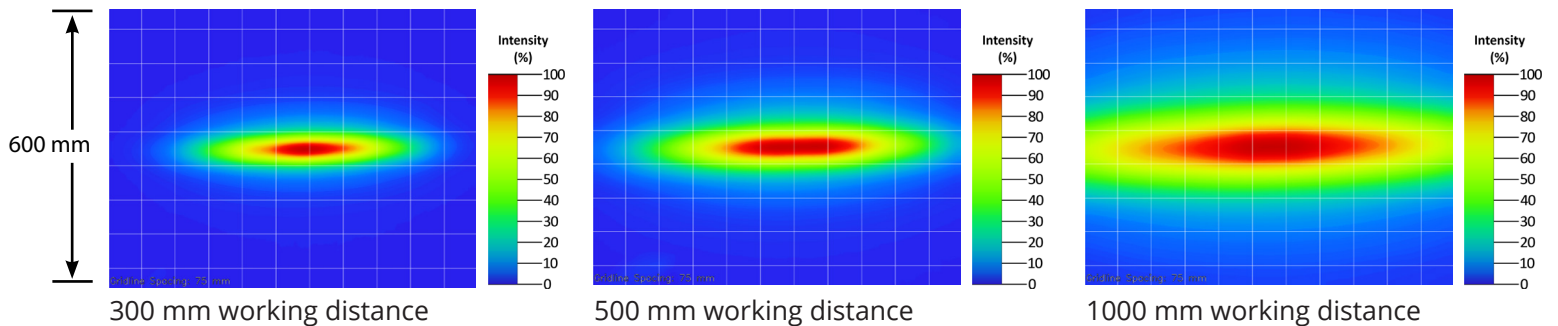

EYE SAFETY

According to IEC 62471:2006. Full documentation available upon request with purchase of product.

Notice


Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelength 625

Caution


Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths 470, 530, and WHI.

ILLUMINATION


The LC300 works best for:



Dark Field



Bright Field



Direct Lighting

PART NUMBER GUIDE

LC300

—



COLOR:



—



LENS:

Leave blank for Standard (Narrow, 16°)

W = Wide (30°)

L = Line (10° x 50°)

Part Number Examples:

LC300-625 LC300, 625 Red Wavelength, Standard Lens
LC300-WHI-L LC300, White, Line Lens

ACCESSORIES

Power Cables



Length	Part Number
5 m	5PM12-5
10 m	5PM12-10
15 m	5PM12-15

Jumper Cables (Daisy Chain)



Length	Part Number
300 mm	5PM12-J300
1000 mm	5PM12-J1000
2000 mm	5PM12-J2000

Mount




Description	Part Number
3-Axis Pan and Tilt Mount	PB300-M5

Mounting Rails



Length	Part Number
300 mm	LEXT300
600 mm	LEXT600
900 mm	LEXT900
1200 mm	LEXT1200
Custom sizes available	

Diffuser

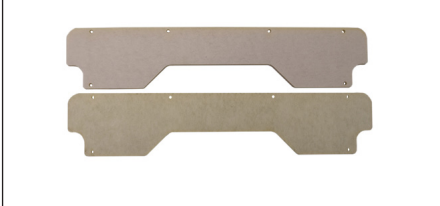

Description	Part Number
Diffuser Kit	L300-DKIT



Linear Polarizer



Description	Part Number
Linear Polarizer Kit	L300-LP

PRODUCT DRAWINGS

*CAD files available on our website
Drawings are in mm

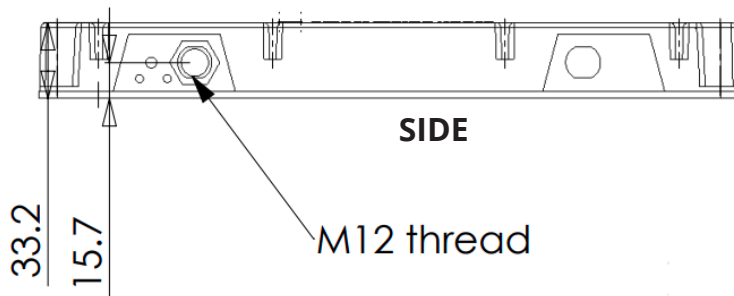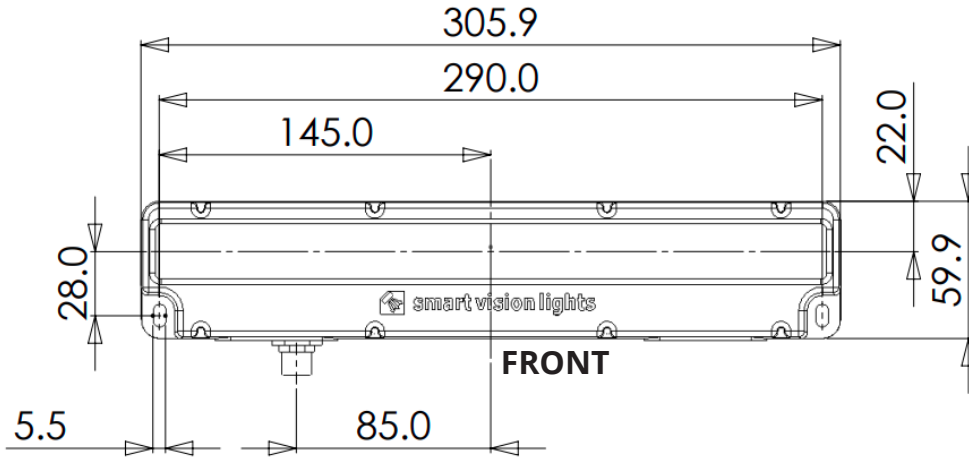

GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

Continuous Operation The light stays on continuously.

OverDrive™ Integrated driver that produces a high-current strobe to the LEDs to drive them beyond their nominal continuous operation output.

Multi-Drive™ Integrated driver that combines continuous operation and OverDrive™ strobe mode

NanoDrive™ Integrated driver that provides fast switching where the light can go from off to on in less than 500 ns.

Built-in Driver The driver contained within the light that controls the current to the LEDs and provides PNP, NPN, and analog dimming controls.

SmartVisionLink™ Integrated feature that enables lighting control through the Bluetooth module and app.

Camera to Light Connect the light directly to the camera, without the need for additional controllers or equipment.

Polarizers Filters that reduce reflections on specular surfaces.

Diffusers Widens the angle of emission by scattering light in all directions.


Pattern Area Lighting Modulated lighting pattern placed over a backlight's surface used to enhance defect detection on transparent and glossy surfaces

SafeStrobe Limiter to keep the light in safe working parameters.


Direct Connect Connect lights in a series without the use of cables.

Daisy Chain Connect lights in a series with the use of cables.


TYPES OF ILLUMINATION



Projector




Dark Field




Radial




Bright Field




Direct




Axial



Line



Diffuse Panel




Backlight



Dome
"Light Tent"

COMMON COLOR / WAVELENGTHS LEGEND

Wavelengths options range from 365 nm to 1650 nm.*
Additional wavelengths available for many light families.



*See Part Number section for **this light's** available standard wavelengths.



Shortwave Infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, 1550 nm, and 1650 nm.*

*Check Part Number section to see if **this light** is available in SWIR wavelengths.



ISO 9001:2015 Certified QMS