

# SCHOTT® Clad Rod

Light Transfer



**BOCK OPTRONICS INC.**

14 Steinway Blvd., Unit 7  
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804  
[sales@bockoptronics.ca](mailto:sales@bockoptronics.ca)  
[www.bockoptronics.ca](http://www.bockoptronics.ca)



## Performance Characteristics



Clad Rods exhibit excellent transmission properties and are ideal for applications requiring bulk light transmission and optical mixing. They are typically used to isolate or remotely locate photo sensors and sources of light. Clad glass rods consist of a high index core material fused together with a lower index cladding glass thus providing total internal reflection. Custom lengths and cross sections can be manufactured to customer specifications. Typical applications for Clad Rod include liquid level sensing and pyrometry.

Clad Rods can also be drawn in custom shapes and used as light homogenizers. The hexagonal shape is an ideal homogenizer. In addition, clad rods are operational temperatures up to 350°C, and are compatible with common optical coatings.

## Typical Clad Rod Specifications

Standard Clad Rods Numerical Aperture 0.56	
Diameter (mm)	Finished Lengths
1.6	Custom diameters and lengths (up to 2 meters) available – Per customer's request
3.18	
6.35	

Sample 5 mm core glass

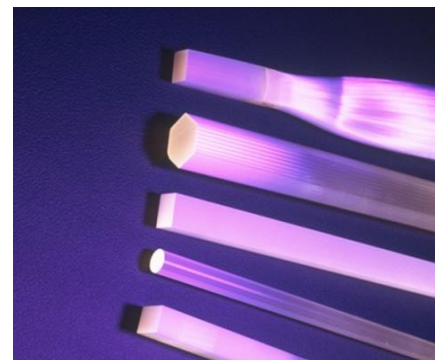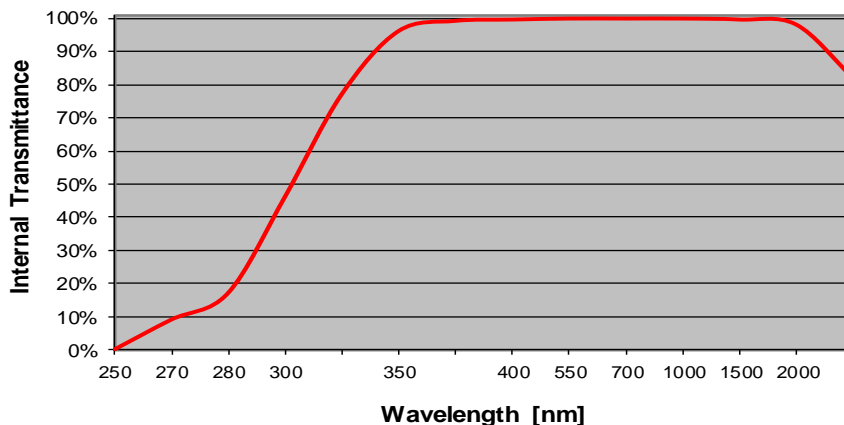

ENGLISH Version 12.2013

All specifications are subject to change without prior notice.  
This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT.  
© SCHOTT North America, Inc.

Lighting and Imaging  
**SCHOTT North America, Inc.**  
122 Charlton Street  
Southbridge, MA 01550  
USA  
Phone: +1 (508) 765-9744  
Fax: +1 (508) 765-1299  
[www.us.schott.com/lightingimaging](http://www.us.schott.com/lightingimaging)  
[lightingimaging@us.schott.com](mailto:lightingimaging@us.schott.com)

**SCHOTT**  
glass made of ideas