
VC-2MC-M/C 150/340

VC-3MC-M/C 280

VC-4MC-M/C 80/180

2, 3 & 4 MEGAPIXELS RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER,
HIGH-SPEED CMOS DIGITAL CAMERA



VC Series is high-resolution CMOS digital cameras for machine vision. Equipped with the latest global shutter CMOS image sensor technology available today, these cameras offer not only high-speed image processing capabilities but also precise exposure control. Furthermore, its outstanding noise reduction technology and a wide range of camera resolutions make these cameras ideal for use in various industrial inspection and scientific research applications.

VIEWORKS

VC-2MC / VC-3MC / VC-4MC

2, 3 & 4 MEGAPIXELS RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA

Main Features

- * 2M/3M/4M Resolutions
- * High-Speed Progressive Scan CMOS Image Sensor
- * Global Shutter CMOS Technology
- * Full Camera Link Interface with 8 bit or 10 bit Data Output
- * Excellent Noise Reduction
- * Field Upgradable Firmware
- * Pixel Defect Correction

Applications

- * Machine Vision Inspection
- * Research and Scientific Imaging
- * Microscopy and Metrology


Specifications

Model	VC-2MC-M/C 150	VC-2MC-M/C 340	VC-3MC-M/C 280	VC-4MC-M/C 80	VC-4MC-M/C 180
Resolution (H × V)	2048 × 1088		1696 × 1710	2048 × 2048	
Sensor	CMOSIS CMV 2000		On Semiconductor LUPA 3000	CMOSIS CMV 4000	
Sensor Size (Optical Format)	11.26 mm × 5.98 mm (2/3")		13.57 mm × 13.68 mm (1")	11.26 mm × 11.26 mm (1")	
Sensor Type	High Speed CMOS Image Sensor				
Pixel Size	5.5 μm × 5.5 μm		8.0 μm × 8.0 μm	5.5 μm × 5.5 μm	
Interface	Camera Link				
Max. Frame Rate	2 Tap: 74.4 fps 4 Tap: 148.5 fps		2 Tap: N/A 4 Tap: N/A	2 Tap: 39.6 fps 4 Tap: 78.9 fps	
	8 Tap: N/A 10 Tap: N/A	8 Tap: 295.4 fps 10 Tap: 337.6 fps	8 Tap: 227 fps 10 Tap: 284 fps	8 Tap: N/A 10 Tap: N/A	8 Tap: 157.1 fps 10 Tap: 179.5 fps
Transfer Time	2 Tap: 13.44 ms 4 Tap: 6.73 ms		2 Tap: N/A 4 Tap: N/A	2 Tap: 25.3 ms 4 Tap: 12.67 ms	
	8 Tap: N/A 10 Tap: N/A	8 Tap: 3.38 ms 10 Tap: 2.96 ms	8 Tap: 4.41 ms 10 Tap: 3.51 ms	8 Tap: N/A 10 Tap: N/A	8 Tap: 6.37 ms 10 Tap: 5.58 ms
Pixel Data Format	8 bit (2/4 Tap) 10 bit (2/4 Tap)	8 bit (2/4/8/10 Tap) 10 bit (2/4/8 Tap)	8 bit (8/10 Tap)	8 bit (2/4 Tap) 10 bit (2/4 Tap)	8 bit (2/4/8/10 Tap) 10 bit (2/4/8 Tap)
Electronic Shutter	Global Shutter				
Data Output Pixel Clock Speed	85 MHz				
Trigger Mode	Free-Run, Trigger Programmable Exposure Time and Trigger Polarity				
Dynamic Range	60 dB				
Dimension / Weight	68 mm × 68 mm × 54 mm, 373 g (with C-mount)				
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C				
Lens Mount	C or F-mount				
Power	10 ~ 14 V DC Typ. 4 W	10 ~ 14 V DC Typ. 4 W	10 ~ 14 V DC Typ. 5 W	10 ~ 14 V DC Typ. 4 W	10 ~ 14 V DC Typ. 4 W
Compliance	CE, FCC, KC (Application of VC-3MC in preparation)				
Configuration Software	Configurator				

VC-2MC / VC-3MC / VC-4MC

2, 3 & 4 MEGAPIXELS RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA

Quantum Efficiency Curves

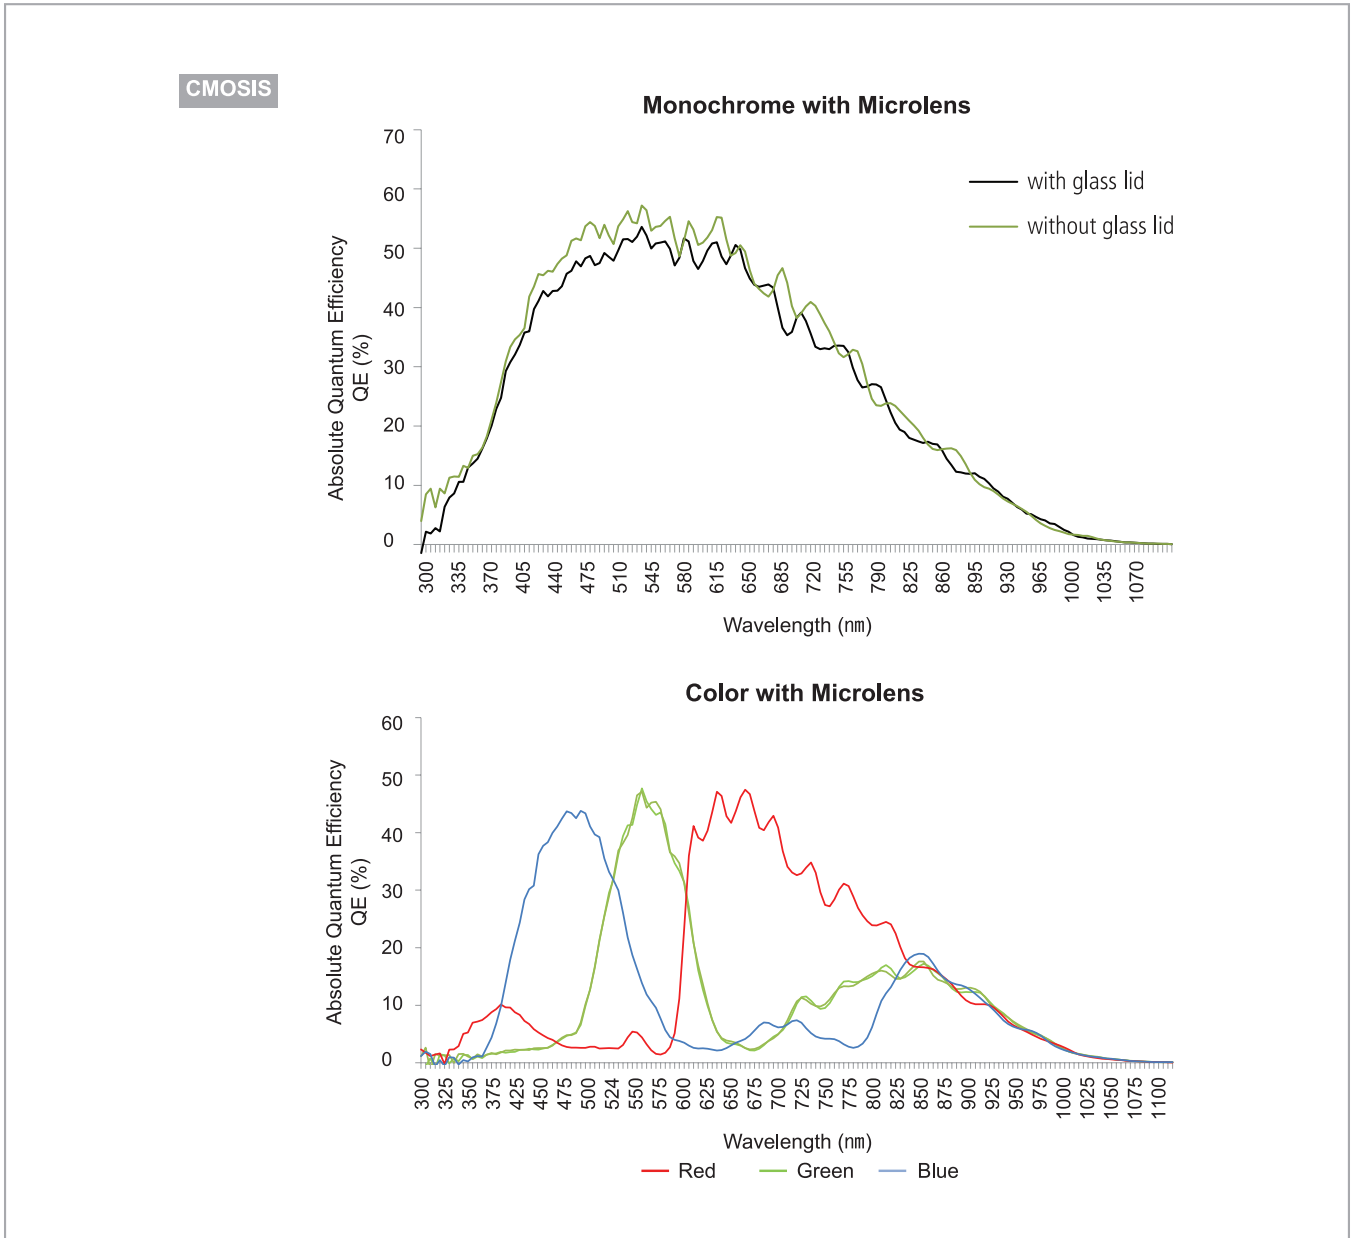




VC-2MC / VC-3MC / VC-4MC

2, 3 & 4 MEGAPIXELS RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA


Mechanical Dimensions

Unit: mm

C-mount for VC-2MC, VC-3MC, VC-4MC

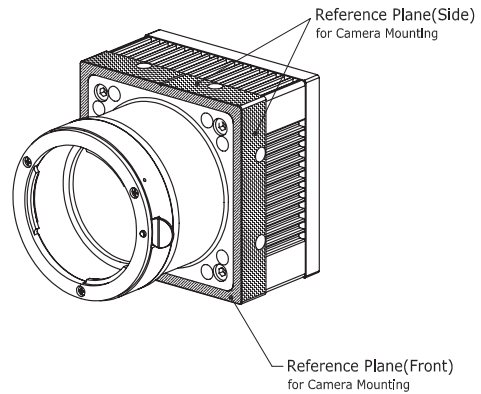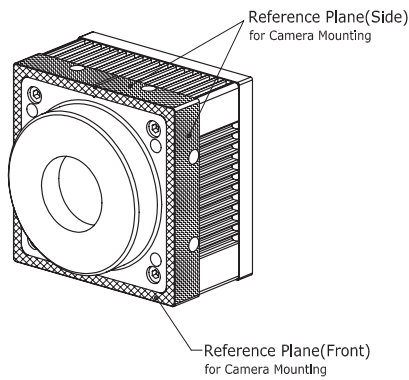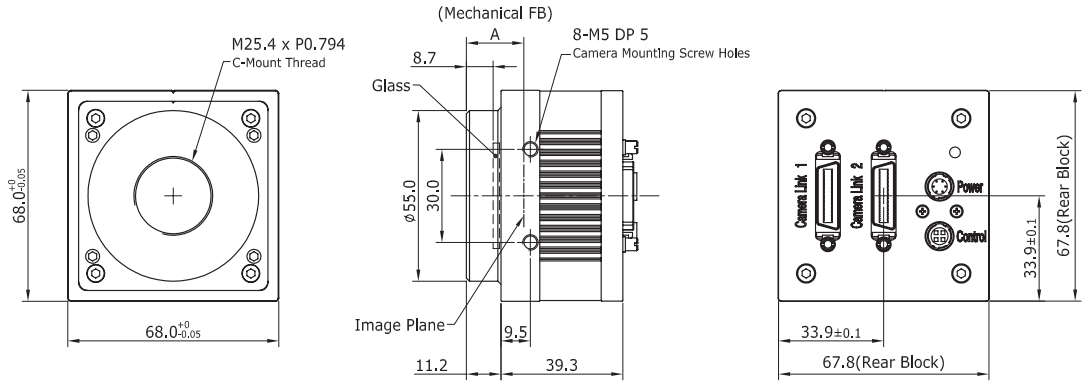

F-mount for VC-2MC, VC-3MC, VC-4MC

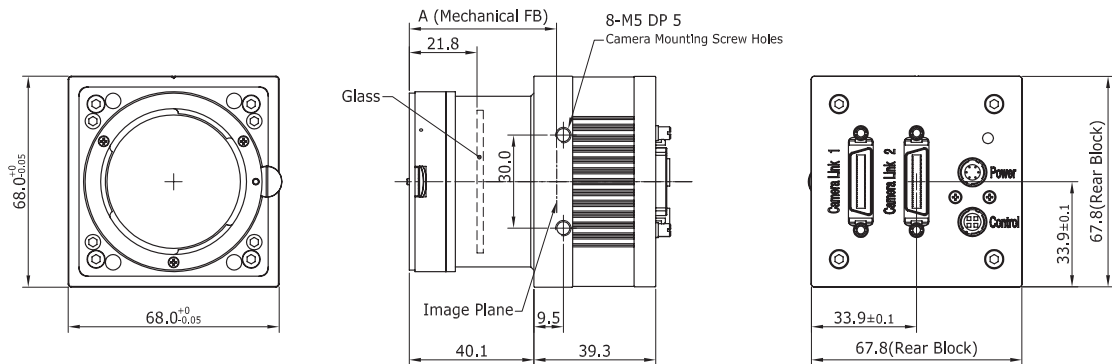

For more information please contact local distributor or visit our website at <http://www.viewworks.com>.

RA14-137-027

Reproduction in whole or in part without written permission is prohibited. Viewworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

For more information please contact:



BOCK OPTRONICS INC.
 14 Steinway Blvd., Unit 7
 Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VIEWWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
 tel +82-70-7011-6161 fax +82-31-386-8631 e-mail sales@viewworks.com

VC-12MX-M/C 180 VC-12MX-M/C 72 VC-25MX-M/C 81 D

High Speed & High Resolution CMOS Digital Camera
with CoaXPress Interface



CoaXPress[®]

The VC-12MX-180, VC-25MX-72 and VC-25MX-81 D, the latest members of industrial proven VC series, are based on the latest CMOS global shutter imagers. The VC-12MX-180 features 12 megapixel resolution with frame rates of up to 181 fps, the VC-25MX-72 features 25 megapixel resolution with frame rates of up to 72 fps and the VC-25MX-81 D features 25 megapixel resolution with frame rates of up to 81 fps.

These combinations of resolution, frame rate, and global shutter set a new standard for Industrial, Scientific, and Surveillance digital imaging applications. Customers in the industrial market can take advantage of common coax cabling to transmit images at rates and distance above and beyond previous standards. With these cameras, image data can be transmitted at up to 6.25 Gbps using a single coaxial cable and up to 25 Gbps using four cables. These high speed and high resolution models are ideal for wide range of demanding applications including PCB and semiconductor inspections.

VIEWWORKS

www.viewworks.com

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D

High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Main Features

- 12 & 25 Megapixel Resolutions
- High-Speed Progressive Scan CMOS Imager
- Global Shutter CMOS Technology
- CoaXPress Interface up to 181 fps at 25 Gbps using 4 CH (VC-12MX-180)
- Flat Field Correction
- DSNU and PRNU Correction (VC-25MX-72/VC-25MX-81 D)
- Low Noise with Optimized Heat Treatment

Applications

- PCB Inspection
- Semiconductor Inspection
- 3D Inspection
- High-end Surveillance

Specifications

Model	VC-12MX-M/C 180	VC-25MX-M/C 72	VC-25MX-M/C 81 D	
Resolution (H × V)	4096 × 3072	5120 × 5120	5120 × 5120	
Sensor	CMOSIS CMV 12000	On Semi. VITA-25K	On Semi. PYTHON-25K	
Sensor Size	22.5 mm × 16.9 mm (Diagonal: 28.1 mm)	23.04 mm × 23.04 mm (Optical Format: 35 mm)	23.04 mm × 23.04 mm (Diagonal: 32.6 mm)	
Sensor Type	High Speed CMOS Image Sensor			
Pixel Size	5.5 μm × 5.5 μm	4.5 μm × 4.5 μm	4.5 μm × 4.5 μm	
Interface	CoaXPress			
Max. Frame Rate	1 CH: 46 fps @ 6.25 Gbps	1 CH: N/A	1 CH: N/A	
	2 CH: 92 fps @ 6.25 Gbps	2 CH: 46 fps @ 6.25 Gbps	2 CH: 44 fps @ 6.25 Gbps	
	4 CH: 181 fps @ 6.25 Gbps	4 CH: 72 fps @ 6.25 Gbps	4 CH: 81 fps @ 6.25 Gbps	
Exposure Time† (1 μs step)	43 μs – 60 s	1 μs – 60 s		
Partial Scan (Max. Speed)	15151 fps at 4 Lines	7692 fps at 4 Lines (H: 256)	10989 fps at 4 Lines (H: 256)	
Pixel Data Format	8 bit	8 bit, 10 bit	8 bit	
Electronic Shutter	Global Shutter			
Gain Control	1× ~ 4×			
Black Level Control	0 – 16 LSB at 8 bit	0 – 16 LSB at 8 bit 0 – 64 LSB at 10 bit	0 – 16 LSB at 8 bit	
Trigger Synchronization	Free-Run, Timed, Trigger Width			
Dynamic Range	54 dB			
Dimension / Weight	80 mm × 80 mm × 101 mm, 620 g (F-mount)	80 mm × 80 mm × 101 mm, 630 g (F-mount)		
Temperature	Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C			
Lens Mount	F-mount			
Power	External	10 ~ 38 V DC, Typ. 12 W	10 ~ 38 V DC, Typ. 10.5 W	10 ~ 38 V DC, Typ. 12 W
	PoCXP	24 V DC, Minimum of two PoCXP cables required		
Compliance	CE, FCC, KC			
API SDK	Viewworks Imaging Solution 7.X			


† The minimum actual exposure time varies depending on the camera model.

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D


High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Spectral Response


VC-12MX-M/C 180

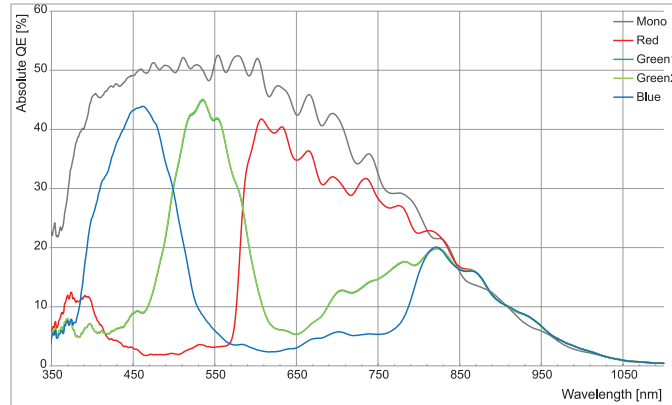


VC-25MX-M/C 72

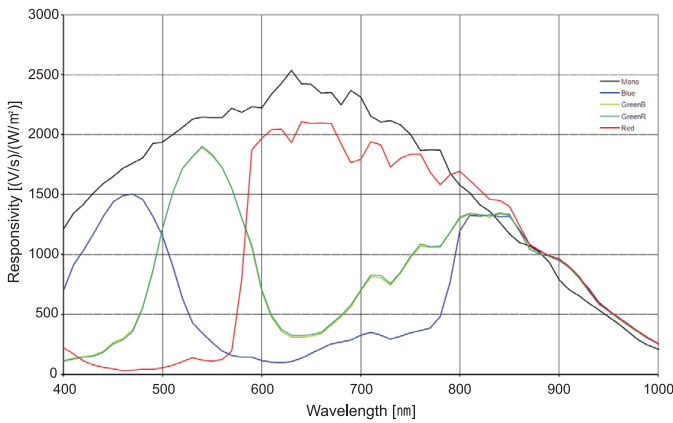

VC-25MX-M/C 81 D

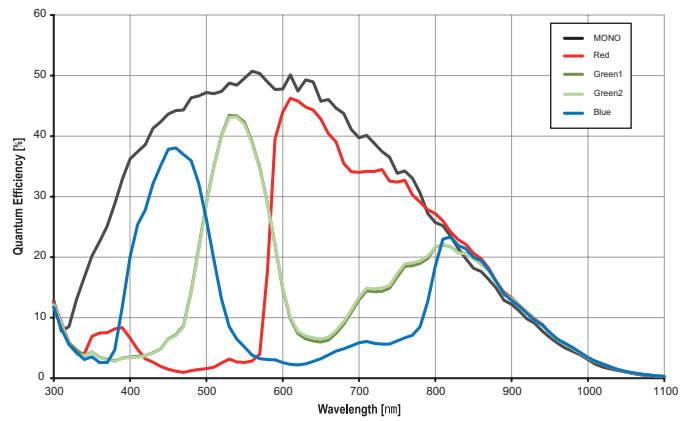

Ordering Scheme

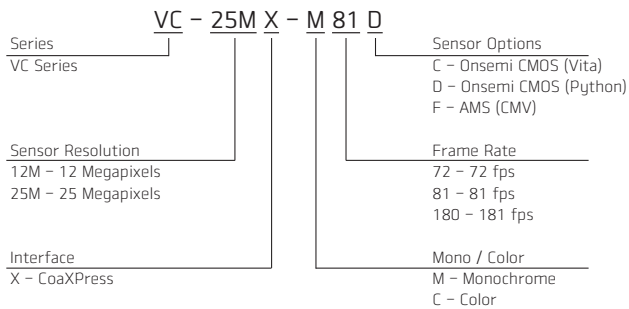


Connector Specification

Power



1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)


Control



1: Trigger IN+ 2: Trigger IN-
3: DC Ground 4: Strobe OUT+
(HR10A-7R-4S)


Data Transfer/Communications

BNC



CH1
CH3

DIN



CH2
CH4 CH1 CH2 CH3 CH4

CH1: Master Connection (75 Ω, DIN 1.0/2.3)




Connectors on camera body

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D




High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Mechanical Dimensions




Unit: mm

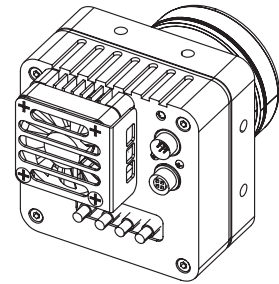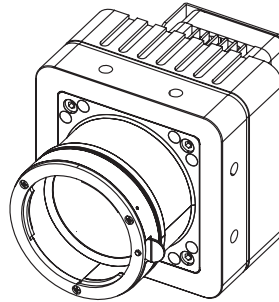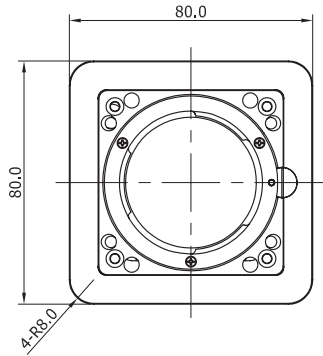

BNC Type Connector

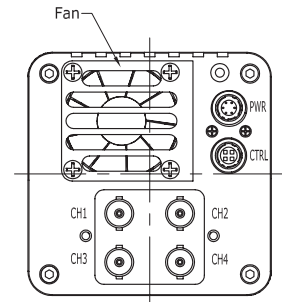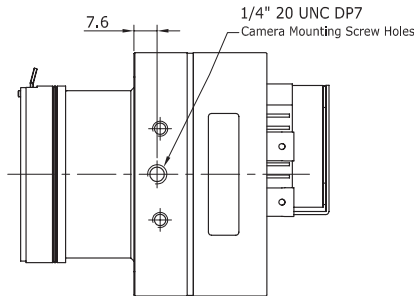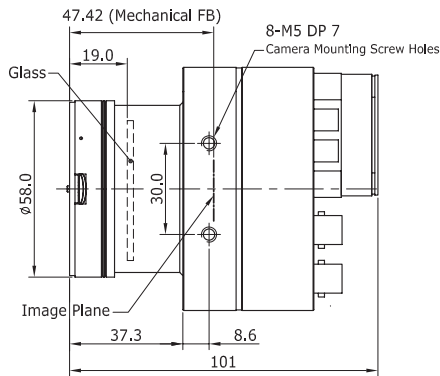

DIN 1.0/2/3 Type Connector

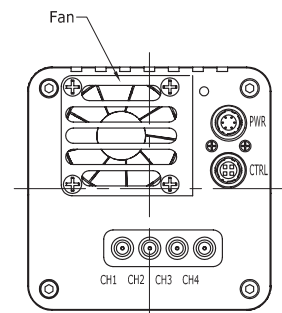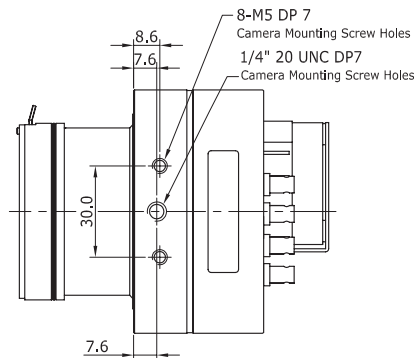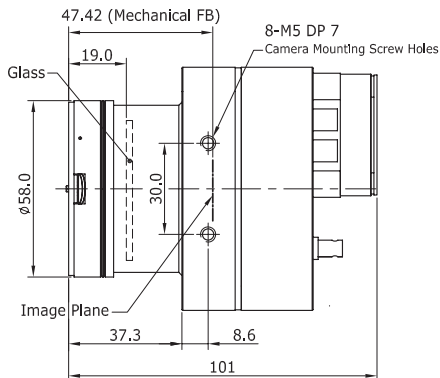

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VC-12MC-M/C 65

VC-25MC-M/C 30

VC-25MC-M/C 30 D

UP TO 25 MEGAPIXEL RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER,
HIGH-SPEED CMOS DIGITAL CAMERA



The VC-12MC-65, VC-25MC-30 and VC-25MC-30 D, the latest members of the CMOS-based VC series, are our new high resolution CMOS cameras with Camera Link interface. The VC-12MC uses the latest 12 megapixel CMOS sensor (CMV12000) technology from CMOSIS, and performs as fast as 64 fps with high quality image. The VC-25MC-30 is based on ON Semiconductor VITA-25K CMOS sensor delivering high quality 25 megapixel images at 30 fps. The VC-25MC-30 D uses the latest 25 megapixel CMOS image sensor (PYTHON-25K) technology from On Semiconductor, and delivers high quality images at 30 fps. With their high resolution and fast speed, these cameras are ideal for applications such as PCB inspection, AOI machines, 3D inspection and many others.

VIEWWORKS

VC-12MC-65 / VC-25MC-30 / VC-25MC-30 D

UP TO 25 MEGAPIXEL RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA

Main Features

- * Resolutions from 12MP up to 25MP
- * High-Speed Progressive Scan CMOS Image Sensor
- * Global Shutter CMOS Technology
- * Full Camera Link Interface with 8 bit or 10 bit Data Output
- * Excellent Noise Reduction and Heat Treatment
- * Field Upgradable Firmware
- * Pixel Defect Correction

Applications

- * PCB Inspection
- * Semiconductor Inspection
- * 3D Inspection
- * Scientific Research Imaging

Specifications


Model	VC-12MC-M/C 65	VC-25MC-M/C 30	VC-25MC-M/C 30 D
Resolution (H × V)	4096 × 3072	5120 × 5120	5120 × 5120
Sensor	CMOSIS CMV 12000	On Semiconductor VITA-25K	On Semiconductor PYTHON-25K
Sensor Size	22.5 mm × 16.9 mm (Diagonal: 28.1 mm)	23.04 mm × 23.04 mm (Optical Format: 35 mm)	23.04 mm × 23.04 mm (Diagonal: 32.6 mm)
Sensor Type	High Speed CMOS Image Sensor		
Pixel Size	5.5 μm × 5.5 μm	4.5 μm × 4.5 μm	
Interface	Camera Link		
Max. Frame Rate	2 Tap: 13.0 fps	2 Tap: N/A	2 Tap: N/A
	4 Tap: 26.0 fps	4 Tap: N/A	4 Tap: N/A
	8 Tap: 51.7 fps	8 Tap: 25.0 fps	8 Tap: 25.3 fps
	10 Tap: 64.3 fps	10 Tap: 30.9 fps	10 Tap: 30.1 fps
Transfer Time	2 Tap: 76.9 ms	2 Tap: N/A	2 Tap: N/A
	4 Tap: 38.5 ms	4 Tap: N/A	4 Tap: N/A
	8 Tap: 19.4 ms	8 Tap: 40.00 ms	8 Tap: 39.52 ms
	10 Tap: 15.6 ms	10 Tap: 32.36 ms	10 Tap: 33.22 ms
Pixel Data Format	8 bit (2/4/8/10 Tap) 10 bit (2/4/8 Tap)		
Electronic Shutter	Global Shutter		
Data Output Pixel Clock Speed	85 MHz		
Trigger Mode	Free-Run, Trigger Programmable Exposure Time and Trigger Polarity		
Dynamic Range	60 dB	54 dB	59 dB
Dimension / Weight	68 mm × 68 mm × 80 mm, 432 g (F-mount)		
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C		
Lens Mount	F-mount, Custom mount available upon request		
Power	10 ~ 14 V DC, Typ. 5 W	10 ~ 14 V DC, Typ. 6 W	10 ~ 14 V DC, Typ. 7 W
Compliance	CE, FCC, KC		
Configuration Software	Configurator		

VC-12MC-65 / VC-25MC-30 / VC-25MC-30 D


UP TO 25 MEGAPIXEL RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA

Quantum Efficiency Curves


VC-12MC-65

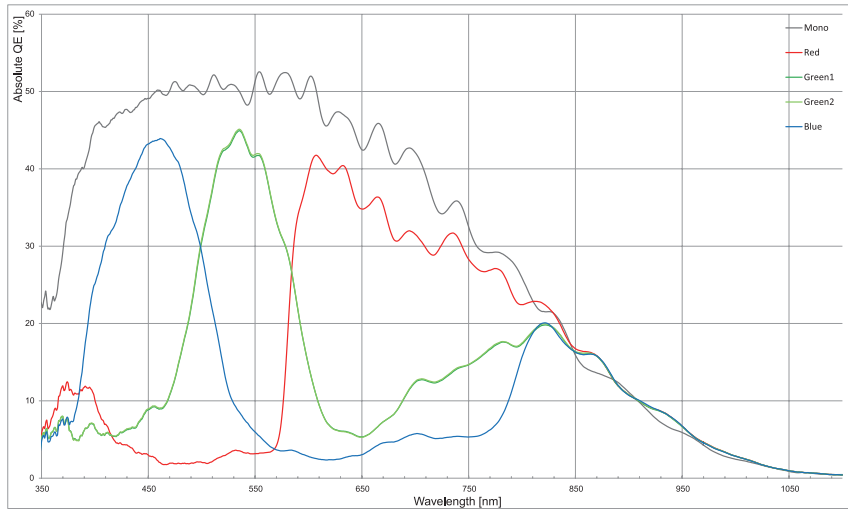


VC-25MC-30

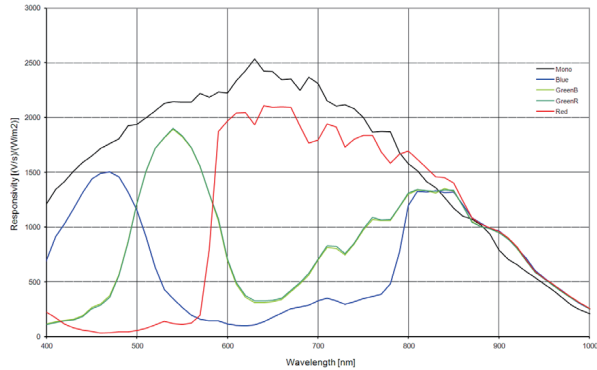

VC-25MC-30 D

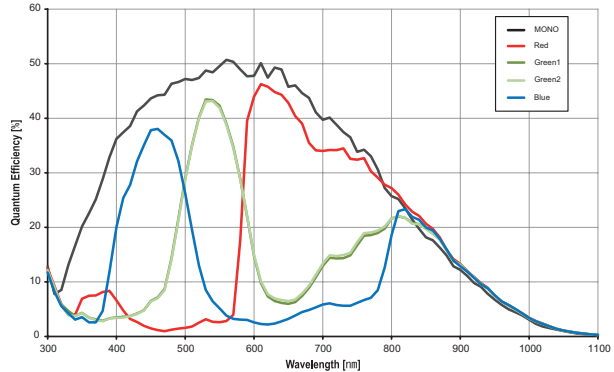

Ordering Scheme

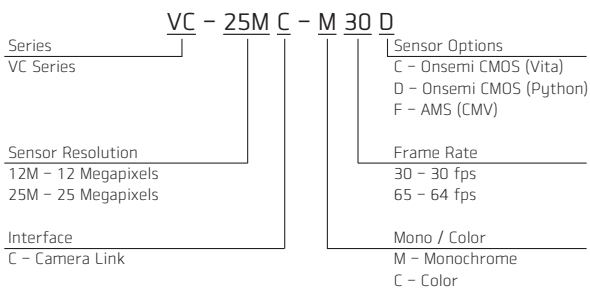

Connector Specification

Power



1 2 3: +12V DC, 4 5 6: GND (HR10A-7R-6PB)

Control



1: Trigger IN+, 2: Trigger IN-
3: DC Ground, 4: Strobe OUT+ (HR10A-7R-4S)

Connectors on camera body


VC-12MC-65 / VC-25MC-30 / VC-25MC-30 D

UP TO 25 MEGA PIXEL RESOLUTIONS, GLOBAL ELECTRONIC SHUTTER, HIGH-SPEED CMOS DIGITAL CAMERA

Mechanical Dimensions

Unit: mm

F-mount for VC-12MC-65, VC-25MC-30 and VC-25MC-30 D

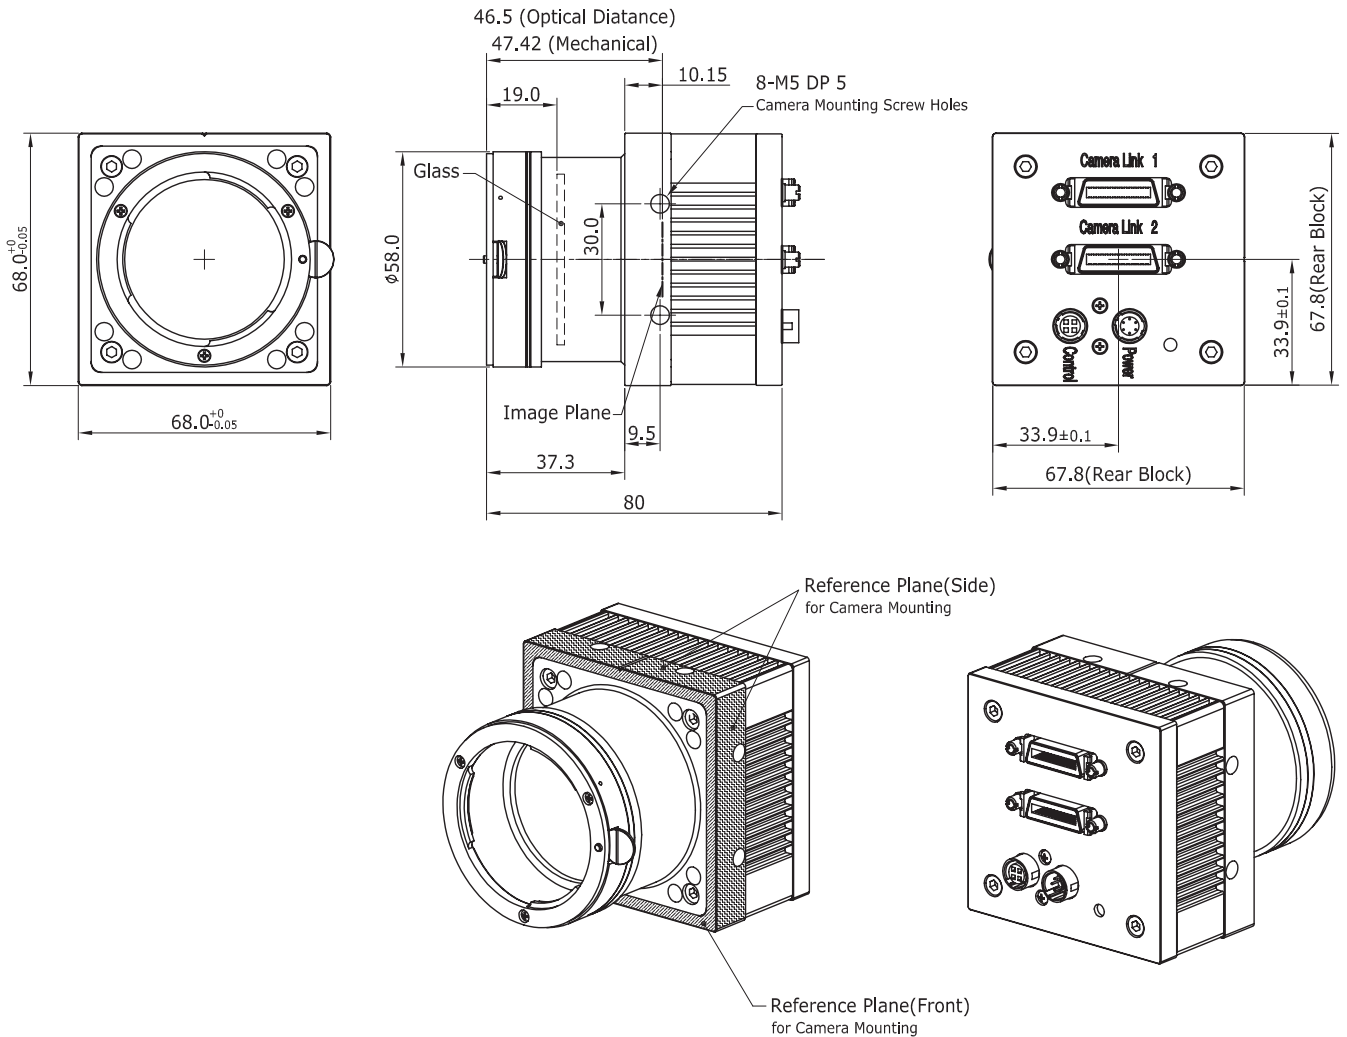

For more information please contact local distributor or visit our website at <http://www.vieworks.com>.

Reproduction in whole or in part without written permission is prohibited. Vieworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

RA14-137-036

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VIEWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
tel +82-70-7011-6161 fax +82-31-386-8631 e-mail vision@vieworks.com

VC-12MX-M/C 180 VC-12MX-M/C 72 VC-25MX-M/C 81 D

High Speed & High Resolution CMOS Digital Camera
with CoaXPress Interface



CoaXPress[®]

The VC-12MX-180, VC-25MX-72 and VC-25MX-81 D, the latest members of industrial proven VC series, are based on the latest CMOS global shutter imagers. The VC-12MX-180 features 12 megapixel resolution with frame rates of up to 181 fps, the VC-25MX-72 features 25 megapixel resolution with frame rates of up to 72 fps and the VC-25MX-81 D features 25 megapixel resolution with frame rates of up to 81 fps.

These combinations of resolution, frame rate, and global shutter set a new standard for Industrial, Scientific, and Surveillance digital imaging applications. Customers in the industrial market can take advantage of common coax cabling to transmit images at rates and distance above and beyond previous standards. With these cameras, image data can be transmitted at up to 6.25 Gbps using a single coaxial cable and up to 25 Gbps using four cables. These high speed and high resolution models are ideal for wide range of demanding applications including PCB and semiconductor inspections.

VIEWORKS

www.vieworks.com

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D

High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Main Features

- 12 & 25 Megapixel Resolutions
- High-Speed Progressive Scan CMOS Imager
- Global Shutter CMOS Technology
- CoaXPress Interface up to 181 fps at 25 Gbps using 4 CH (VC-12MX-180)
- Flat Field Correction
- DSNU and PRNU Correction (VC-25MX-72/VC-25MX-81 D)
- Low Noise with Optimized Heat Treatment

Applications

- PCB Inspection
- Semiconductor Inspection
- 3D Inspection
- High-end Surveillance

Specifications

Model	VC-12MX-M/C 180	VC-25MX-M/C 72	VC-25MX-M/C 81 D	
Resolution (H × V)	4096 × 3072	5120 × 5120	5120 × 5120	
Sensor	CMOSIS CMV 12000	On Semi. VITA-25K	On Semi. PYTHON-25K	
Sensor Size	22.5 mm × 16.9 mm (Diagonal: 28.1 mm)	23.04 mm × 23.04 mm (Optical Format: 35 mm)	23.04 mm × 23.04 mm (Diagonal: 32.6 mm)	
Sensor Type	High Speed CMOS Image Sensor			
Pixel Size	5.5 μm × 5.5 μm	4.5 μm × 4.5 μm	4.5 μm × 4.5 μm	
Interface	CoaXPress			
Max. Frame Rate	1 CH: 46 fps @ 6.25 Gbps	1 CH: N/A	1 CH: N/A	
	2 CH: 92 fps @ 6.25 Gbps	2 CH: 46 fps @ 6.25 Gbps	2 CH: 44 fps @ 6.25 Gbps	
	4 CH: 181 fps @ 6.25 Gbps	4 CH: 72 fps @ 6.25 Gbps	4 CH: 81 fps @ 6.25 Gbps	
Exposure Time† (1 μs step)	43 μs – 60 s	1 μs – 60 s		
Partial Scan (Max. Speed)	15151 fps at 4 Lines	7692 fps at 4 Lines (H: 256)	10989 fps at 4 Lines (H: 256)	
Pixel Data Format	8 bit	8 bit, 10 bit	8 bit	
Electronic Shutter	Global Shutter			
Gain Control	1× ~ 4×			
Black Level Control	0 – 16 LSB at 8 bit	0 – 16 LSB at 8 bit 0 – 64 LSB at 10 bit	0 – 16 LSB at 8 bit	
Trigger Synchronization	Free-Run, Timed, Trigger Width			
Dynamic Range	54 dB			
Dimension / Weight	80 mm × 80 mm × 101 mm, 620 g (F-mount)	80 mm × 80 mm × 101 mm, 630 g (F-mount)		
Temperature	Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C			
Lens Mount	F-mount			
Power	External	10 ~ 38 V DC, Typ. 12 W	10 ~ 38 V DC, Typ. 10.5 W	10 ~ 38 V DC, Typ. 12 W
	PoCXP	24 V DC, Minimum of two PoCXP cables required		
Compliance	CE, FCC, KC			
API SDK	Viewworks Imaging Solution 7.X			


† The minimum actual exposure time varies depending on the camera model.

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D


High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Spectral Response


VC-12MX-M/C 180

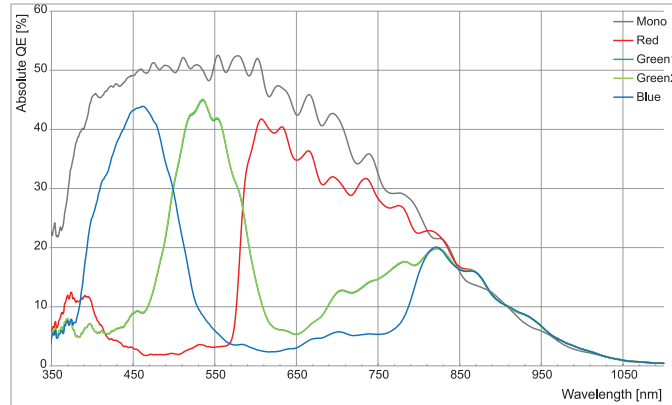


VC-25MX-M/C 72

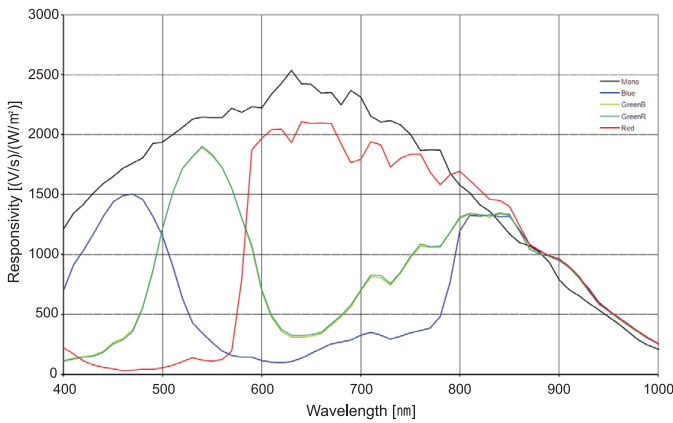

VC-25MX-M/C 81 D

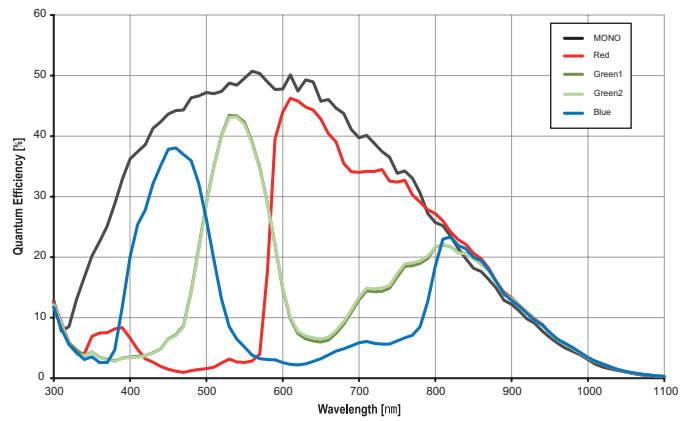

Ordering Scheme

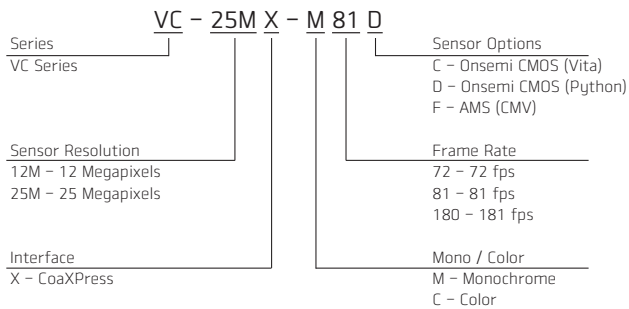

Connector Specification

Power




1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+ 2: Trigger IN-
3: DC Ground 4: Strobe OUT+
(HR10A-7R-4S)

Data Transfer/Communications

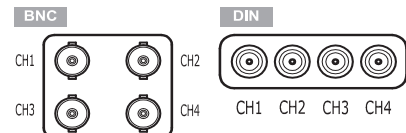

CH1: Master Connection (75 Ω, DIN 1.0/2.3)




Connectors on camera body

VC-12MX-180 / VC-25MX-72 / VC-25MX-81 D




High Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Mechanical Dimensions




Unit: mm

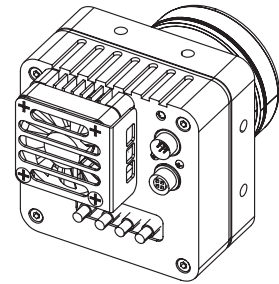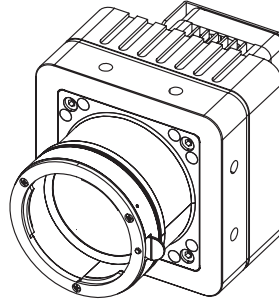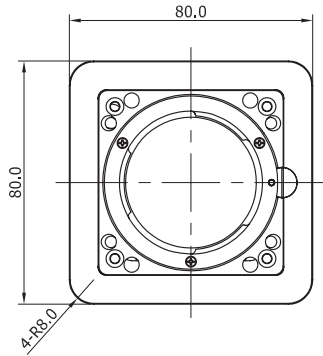

BNC Type Connector

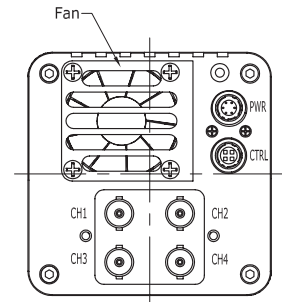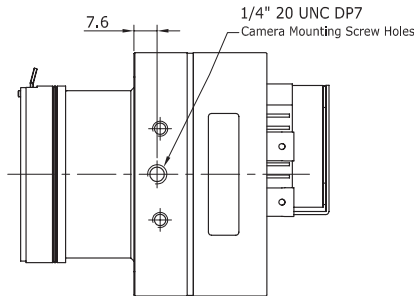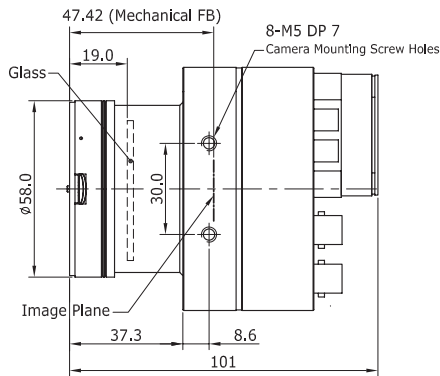

DIN 1.0/2/3 Type Connector

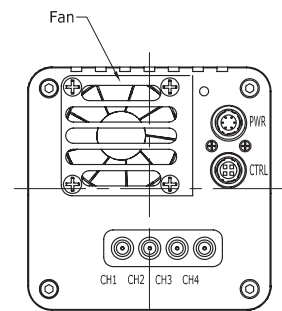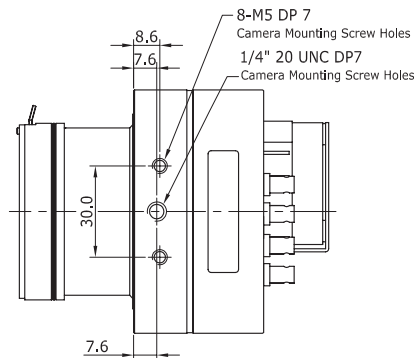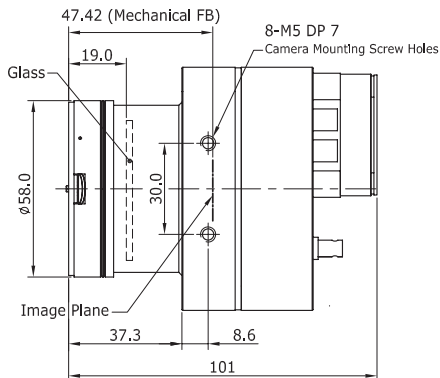

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VC-12MX-M/C 330 F

The Fastest Speed & High Resolution CMOS Digital Camera
with CoaXPress Interface



CoaXPress[®]

The VC-12MX-330 F camera, the latest member of the industry proven VC series, is based on the latest CMOS global shutter imager. Equipped with the Viewworks' innovative technologies proved by the world's top FPD manufacturers, this camera offers not only the highest frame rate but also highly uniformed images. This camera supports 12 megapixel resolutions with frame rate up to 335 fps (CoaXPress - 8 Channels). Its CoaXPress interface supports transmitting image data at up to 25 Gbps using four coaxial cables and up to 50 Gbps using eight cables.

Featured with high quality image uniformity and high resolution, this camera is ideal for wide range of demanding applications including FPD, PCB and semiconductor inspections.

VIEWWORKS

www.viewworks.com

VC-12MX-M/C 330 F

The Fastest Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Main Features

- 12 Megapixels Resolution
- High-Speed Progressive Scan CMOS Imager
- Global Shutter CMOS Technology
- CoaXPress Interface up to 335 fps at 50 Gbps using 8 CH
- Flat Field Correction
- Low Noise with Optimized Heat Treatment

Applications

- FPD and Electronics Inspection
- Semiconductor Inspection
- Research and Scientific Imaging
- Document / Film Scanning


Specifications

Model	VC-12MX-M/C 330 F	
Resolution (H × V)	4096 × 3072	
Sensor	CMOSIS CMV 12000	
Sensor Size	22.5 mm × 16.9 mm (Diagonal: 28.1 mm)	
Sensor Type	High Speed CMOS Image Sensor	
Pixel Size	5.5 μm × 5.5 μm	
Interface	CoaXPress	
Max. Frame Rate	4 CH: 188 fps @ 6.25 Gbps	
	8 CH: 335 fps @ 6.25 Gbps	
Exposure Time (1 μs step)	16 μs – 60 s	
Partial Scan (Max. Speed)	27777 fps at 4 Lines	
Pixel Data Format	8 bit	
Electronic Shutter	Global Shutter	
Gain Control	×1 ~ ×4 (0 ~ 12 dB)	
Black Level Control	0 – 16 LSB at 8 bit	
Trigger Synchronization	Free-Run, Timed, Trigger Width	
Dynamic Range	54 dB	
Dimension / Weight	90 mm × 90 mm × 114 mm, 745 g (F-mount)	
Temperature	Operating: 0°C ~ 40°C (Housing: 10°C ~ 50°C), Storage: -40°C ~ 70°C	
Lens Mount	F-mount	
Power	External	8 ~ 30 V DC, Typ. 18 W
	PoCXP	24 V DC, Minimum of four PoCXP cables required
Compliance	CE, FCC, KC	
API SDK	Vieworks Imaging Solution 7.X	


VC-12MX-M/C 330 F

The Fastest Speed & High Resolution CMOS Digital Camera with CoaXPress Interface

Spectral Response

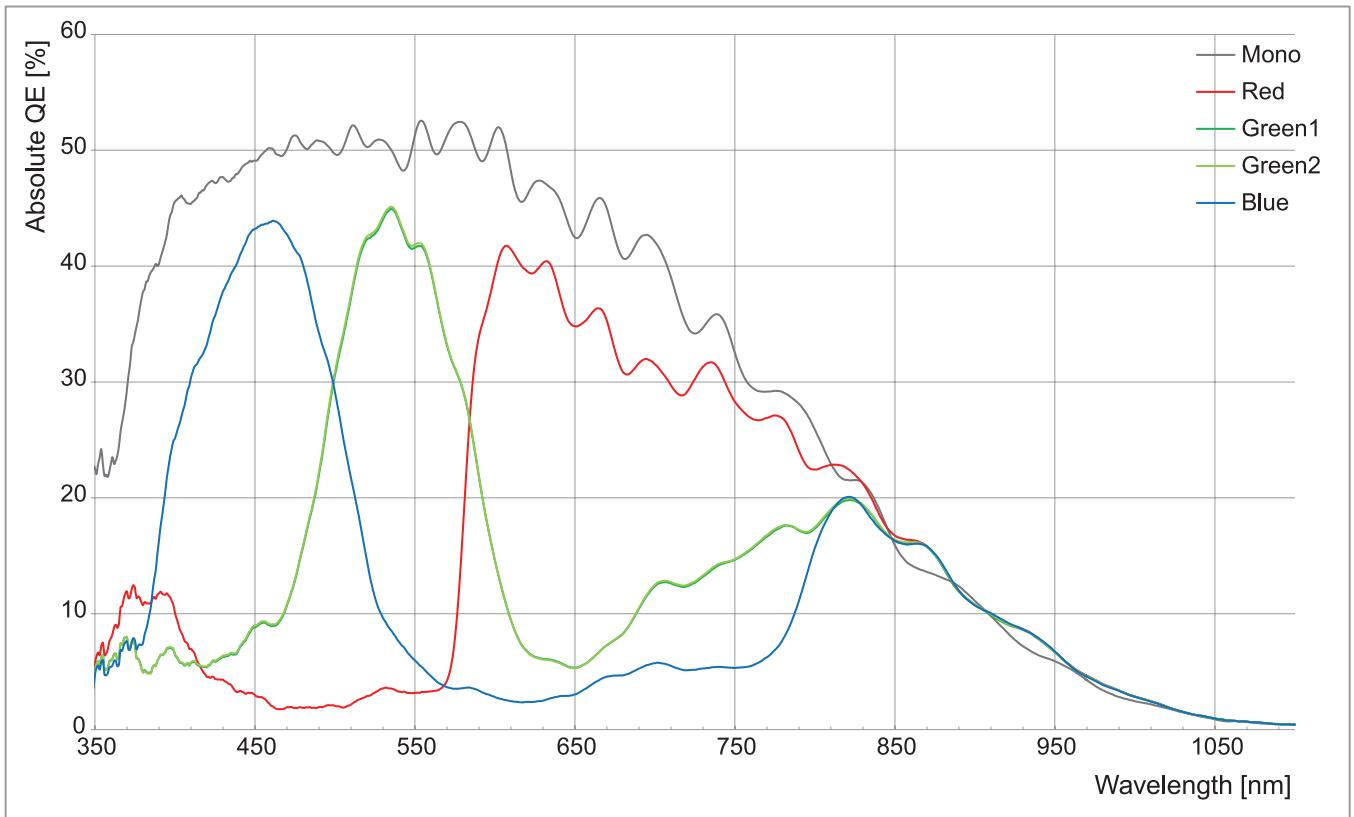

Ordering Scheme

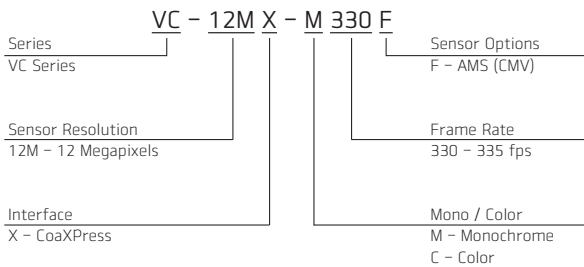


Connector Specification

Power



1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)


Control



1: Trigger IN+ 2: Trigger IN-
3: DC Ground 4: Strobe OUT+
(HR10A-7R-4S)

Data Transfer/Communications

DIN



CH1 CH2 CH3 CH4 CH5 CH6 CH7 CH8

CH1: Master Connection (75 Ω, DIN 1.0/2.3)



Connectors on camera body

VC-12MX-M/C 330 F

The Fastest Speed & High Resolution CMOS Digital Camera with CoaXPRESS Interface

Mechanical Dimensions

Unit: mm

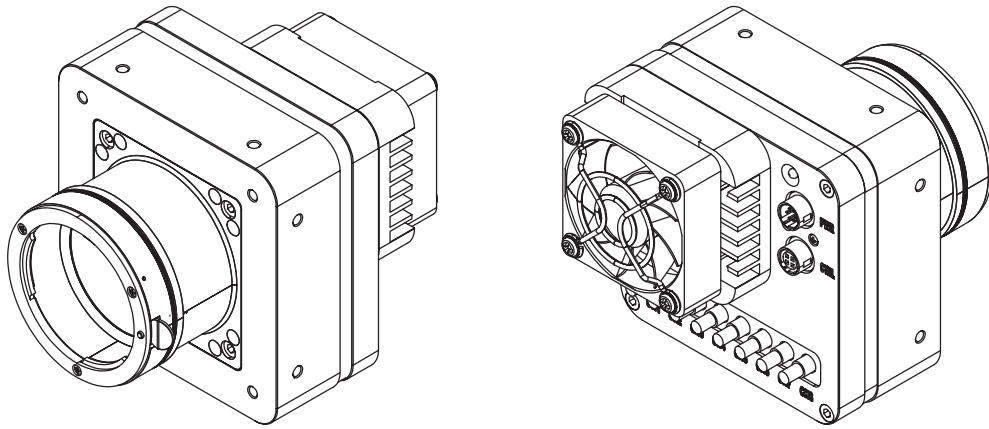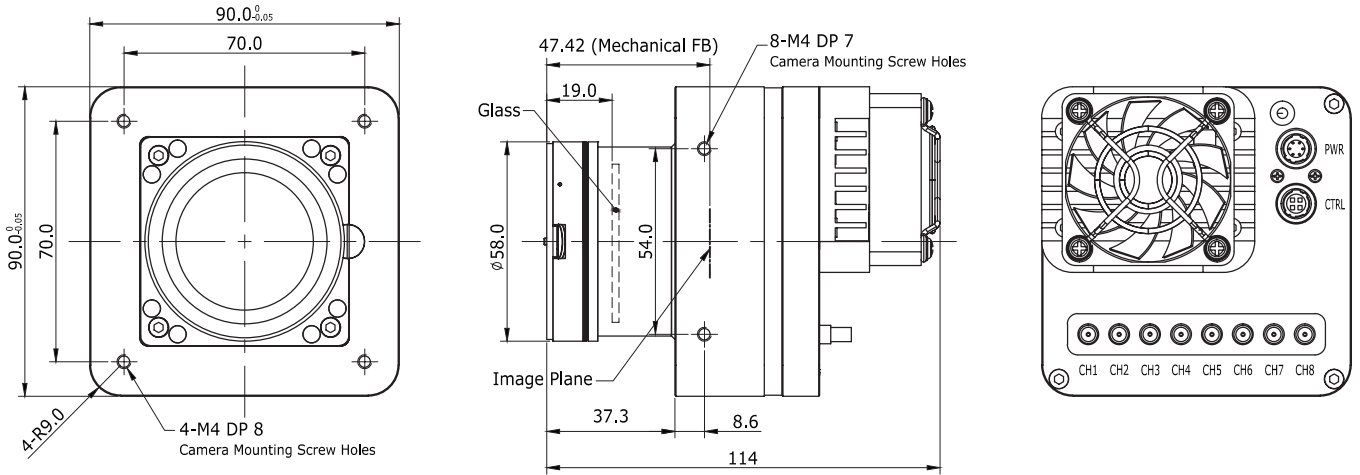

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VC-25MC-M/C 31 I

25 Megapixel High Speed CMOS Digital Camera



The VC-25MC-31 I, the latest model of the industrial proven VC series, is a new 25 megapixel resolution CMOS camera with the Camera Link interface. The VC-25MC-31 I uses the latest CMOS global shutter image sensor (GMAX0505) technology from Gpixel and offers up to 31.7 frames per second at 5120 × 5120 resolution. These combinations of high resolution, high speed and global shutter set a new standard for industrial, scientific and surveillance digital imaging applications. Equipped with the Viewworks' innovative technologies proved by world's top FPD manufacturers, the VC-25MC-31 I camera offers not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, this camera is ideal for wide range of demanding applications such as FPD, PCB and semiconductor inspections.

VIEWWORKS

www.viewworks.com

VC-25MC-M/C 31 I

25 Megapixel High Speed CMOS Digital Camera

Main Features

- 25 Megapixel Resolution
- Camera Link Full Interface up to 31.7 fps
- Global Shutter CMOS Technology
- DSNU and PRNU Correction
- Flat Field Correction
- GenICam Compatible – XML based Control

Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning


Specifications

Model	VC-25MC-M/C 31 I	
Resolution (H × V)	5120 × 5120	
Sensor	Gpixel GMAX0505	
Sensor Size (Diagonal)	12.8 mm × 12.8 mm (18.1 mm)	
Pixel Size	2.5 μm × 2.5 μm	
Interface	Camera Link Base / Medium / Full / 10 Tap, 26-pin SDR Connector	
Max. Frame Rate	2 Tap: 6.4 fps	
	4 Tap: 12.7 fps	
	8 Tap: 25.2 fps	
	10 Tap: 31.7 fps	
Exposure Time (1 μs step)	1 μs – 60 s	
Partial Scan (Max. Speed)	546.4 fps at 64 × 2	
Pixel Data Format	Mono	Mono 8 / Mono 10 / Mono 12
	Color	GB Bayer 8 / GB Bayer 10 / GB Bayer 12
Electronic Shutter	Global Shutter	
Trigger Synchronization	Free-Run, Hardware Trigger or CC1	
External Trigger	3.3 V ~ 24.0 V, 10 mA, Logical Level Input, Optically Isolated	
Dynamic Range	65 dB	
Gain Control	1× ~ 32×	
Black Level Control	0 ~ 255 LSB at 12 bit	
Dimension / Weight	50 mm × 50 mm × 54 mm, 215 g (with C mount)	
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount	C-mount, Custom mount available upon request	
Power	External	11 ~ 24 V DC
	Dissipation	Typ. 6.0 W
Compliance	CE, FCC, KC	


VC-25MC-M/C 31 I

25 Megapixel High Speed CMOS Digital Camera

Spectral Response

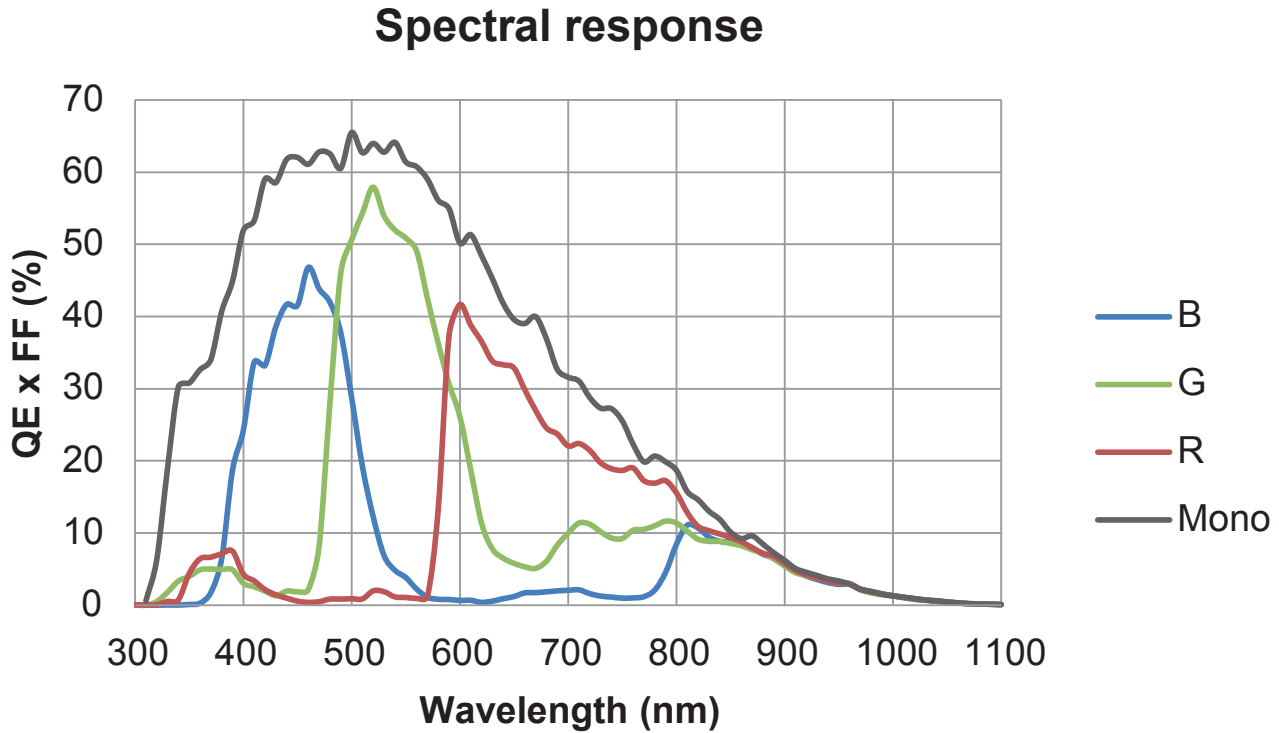

Ordering Scheme

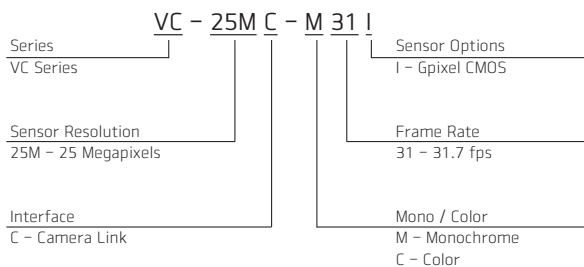

Connector Specification

Power / Control



- 1: DC Ground
- 2: +12 V DC
- 3: I/O Output-
- 4: I/O Output+
- 5: Trigger IN-
- 6: Trigger IN+
- 7~12: Not Connected (HR10A-10R-12PB)


Connectors on camera body

VC-25MC-M/C 31 I

25 Megapixel High Speed CMOS Digital Camera

Mechanical Dimensions

Unit: mm

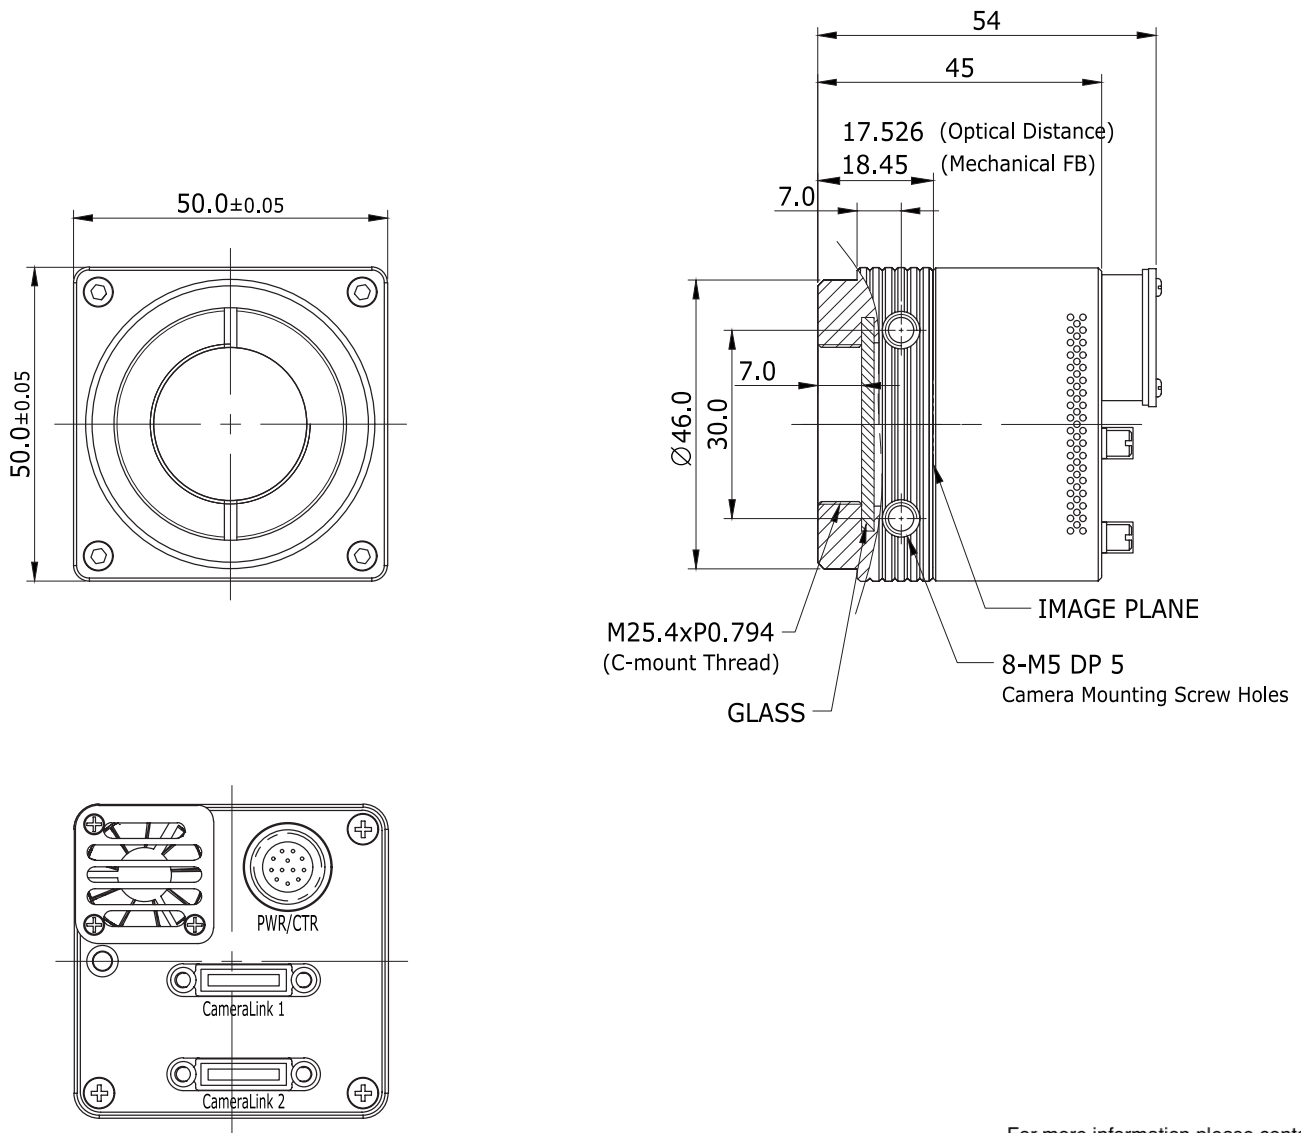

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VC-50MC

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH CAMERA LINK INTERFACE



The VC-50MC, the latest member of the industrial proven VC series, is a 50 megapixel resolution CMOS camera with the Camera Link interface. The VC-50MC uses the latest 50 megapixel CMOS imaging sensor (CMV50000) technology from AMS CMOSIS, and offers up to 17.5 frames per second at 7920 × 6004 resolution. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-50MC camera offers not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, this camera is ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VC-50MC

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH CAMERA LINK INTERFACE

Main Features

- * 50 Megapixel Resolution (AMS CMOSIS)
- * High Speed Progressive Scan CMOS Imager
- * Global Shutter CMOS Technology
- * Camera Link (Base / Medium / Full) Interface
- * Pixel Defect Correction
- * Flat Field Correction
- * DSNU and PRNU Correction

Applications

- * Flat Panel Display Inspection
- * PCB Inspection
- * Machine Vision Inspection
- * Microscopy and Metrology


Specifications

Model	VC-50MC-M/C 18
Resolution (H × V)	7920 × 6004
Sensor	AMS CMOSIS CMV 50000
Sensor Size	36.43 mm × 27.62 mm (Diagonal: 45.72 mm, Optical Format: 35 mm)
Sensor Type	High Speed CMOS Image Sensor
Pixel Size	4.6 μm × 4.6 μm
Interface	Camera Link Base / Medium / Full
Max. Frame Rate (@ 85 MHz)	2 Tap: 3.5 fps
	3 Tap: 5.2 fps
	4 Tap: 7.1 fps
	8 Tap: 14.1 fps
	10 Tap: 17.5 fps
Exposure Time (1 μs step)	1 μs – 60 s
Pixel Data Format	8 bit (2/3/4/8/10 Tap), 10 bit (2/4/8 Tap), 12 bit (2/4 Tap)
Data Output Pixel Clock Speed	85 MHz / 65 MHz
Electronic Shutter	Global Shutter
Exposure Mode	Free-Run, Timed and Trigger Width
Dynamic Range	64 dB
Gain Control	1 × ~ 30 × (1/1024 step)
Black Level Control	0 ~ 256 LSB at 12 bit (1 LSB step)
Dimension / Weight	68 mm × 68 mm × 102 mm, 432 g
Temperature	Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C
Vibration / Shock	3G (20 ~ 200 Hz) XYZ / 10G 6 ms
Lens Mount	F-mount, Custom mount available upon request
Power	10 ~ 24 V DC, Typ. 9.0 W
Compliance	CE, FCC, KC
Configuration Software	Configurator


VC-50MC

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH CAMERA LINK INTERFACE


Quantum Efficiency Curves

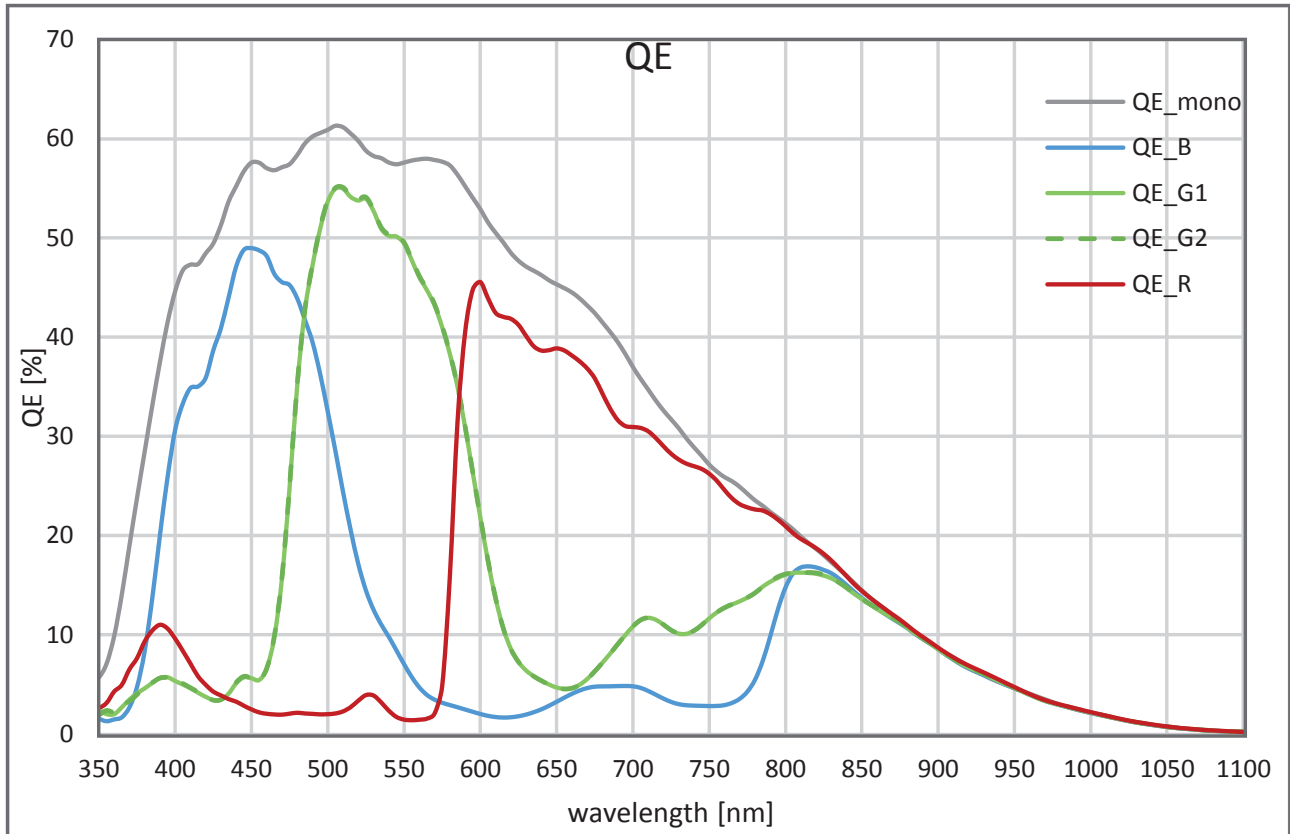

Ordering Scheme

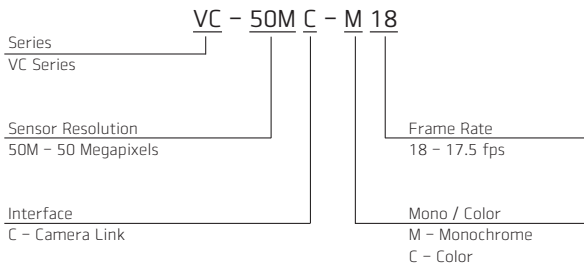

Connector Specification

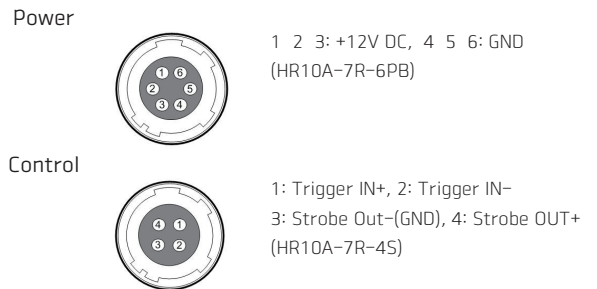


Connectors on camera body

VC-50MC

50 MEGA PIXEL CMOS DIGITAL CAMERA WITH CAMERA LINK INTERFACE

Mechanical Dimensions

Unit: mm

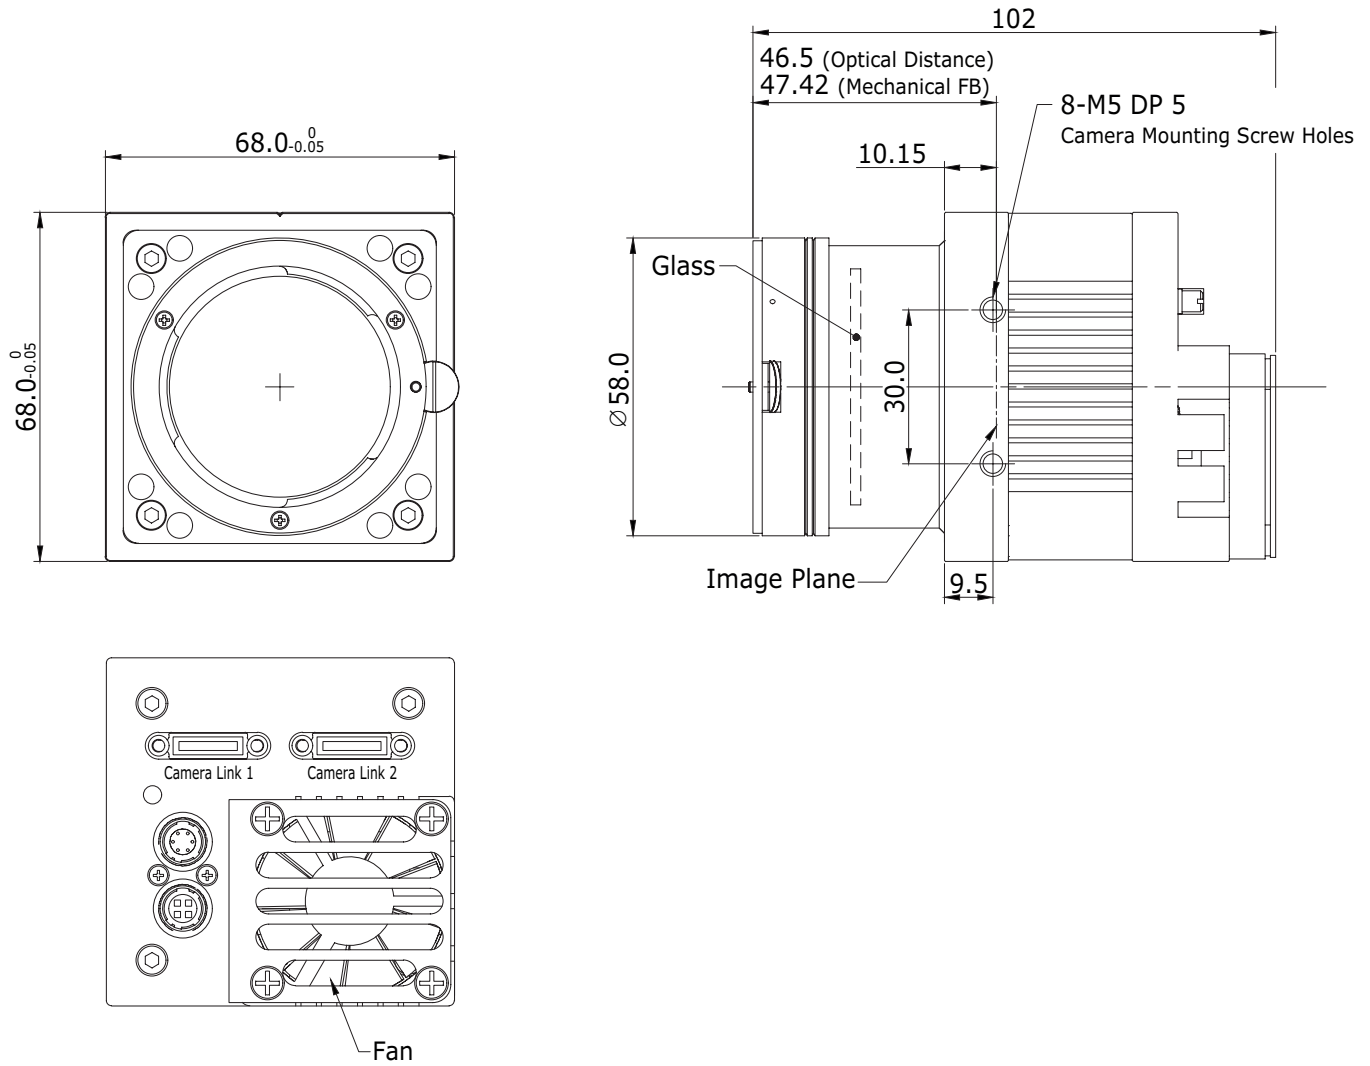

For more information please contact local distributor or visit our website at <http://www.viewworks.com>.

Reproduction in whole or in part without written permission is prohibited. Viewworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

D-18-278

For more information please contact:



BOCK OPTONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VIEWWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
tel +82-70-7011-6161 fax +82-31-386-8631 e-mail sales@viewworks.com

VC-50MX

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH COAXPRESS INTERFACE



The VC-50MX, the latest member of the industrial proven VC series, is a 50 megapixel resolution CMOS camera with the CoaXPress interface. The VC-50MX uses the latest 50 megapixel CMOS image sensor (CMV50000) technology from AMS CMOSIS, and offers up to 30.9 frames per second at 7920 × 6004 resolution. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-50MX camera offers not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, this camera is ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VC-50MX

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH COAXPRESS INTERFACE

Main Features

- * 50 Megapixel Resolution (AMS CMOSIS)
- * High Speed Progressive Scan CMOS Imager
- * Global Shutter CMOS Technology
- * CoaXPress Interface up to 30 fps at 25 Gbps using 4 CH
- * Pixel Defect Correction
- * Flat Field Correction
- * DSNU and PRNU Correction

Applications

- * Flat Panel Display Inspection
- * PCB Inspection
- * Machine Vision Inspection
- * Microscopy and Metrology


Specifications

Model	VC-50MX-M/C 30		
Resolution (H × V)	7920 × 6004		
Sensor	AMS CMOSIS CMV 50000		
Sensor Size (Optical Diagonal)	35 mm (45.72 mm)		
Sensor Type	High Speed CMOS Image Sensor		
Pixel Size	4.6 μm × 4.6 μm		
Interface	CoaXPress		
Max. Frame Rate	1CH: 7.7 fps @ 6.25 Gbps	2CH: 15.5 fps @ 6.25 Gbps	4CH: 30.9 fps @ 6.25 Gbps
Exposure Time (1 μs step)	1 μs – 60 s		
Partial Scan (Max. Speed)	3968 fps at 4 Lines		
Pixel Data Format	Mono	Mono 8 / Mono 10 / Mono 12	
	Color	BG Bayer 8 / BG Bayer 10 / BG Bayer 12	
Electronic Shutter	Global Shutter		
Exposure Mode	Free-Run, Timed and Trigger Width		
Dynamic Range	64 dB		
Gain Control	1 × ~ 30 × (1/1024 step)		
Black Level Control	0 ~ 256 LSB at 12 bit (1 LSB step)		
Dimension / Weight	80 mm × 80 mm × 112 mm, 760 g		
Temperature	Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C		
Vibration / Shock	3G (20 ~ 200 Hz) XYZ / 10G 6 ms		
Lens Mount	F-mount, Custom mount available upon request		
Power	External	10 ~ 24 V DC, Typ. 12.0 W	
	PoCXP	24 V DC, Minimum of two PoCXP cables required	
Compliance	CE, FCC, KC		
API SDK	Vieworks Imaging Solution 7.X		


VC-50MX

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH COAXPRESS INTERFACE


Quantum Efficiency Curves

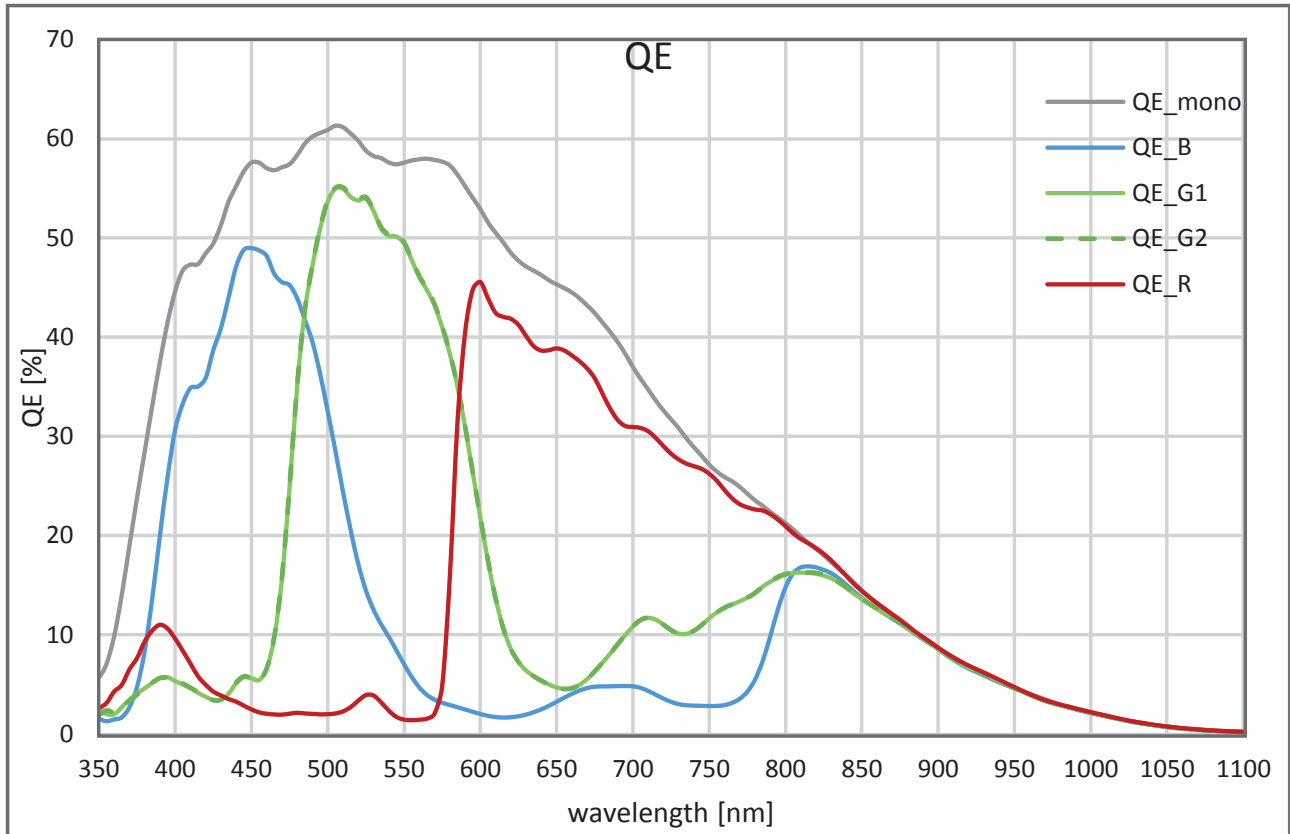

Ordering Scheme

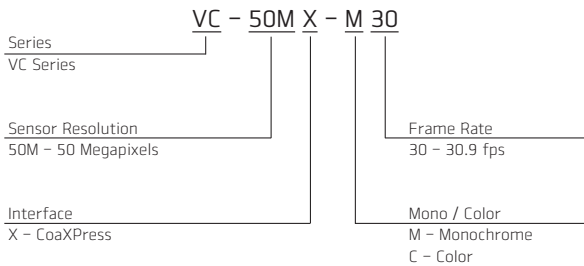

Connector Specification

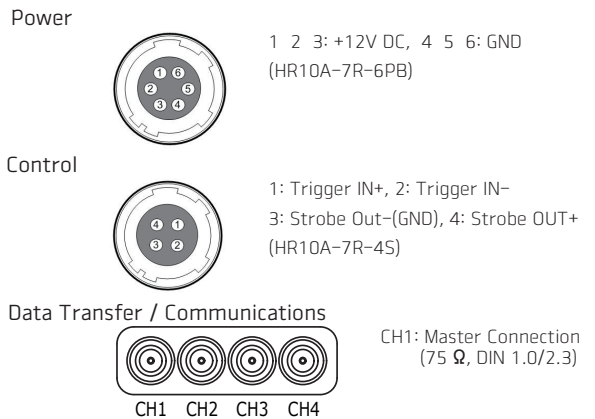


Connectors on camera body

VC-50MX

50 MEGAPIXEL CMOS DIGITAL CAMERA WITH COAXPRESS INTERFACE

Mechanical Dimensions

Unit: mm

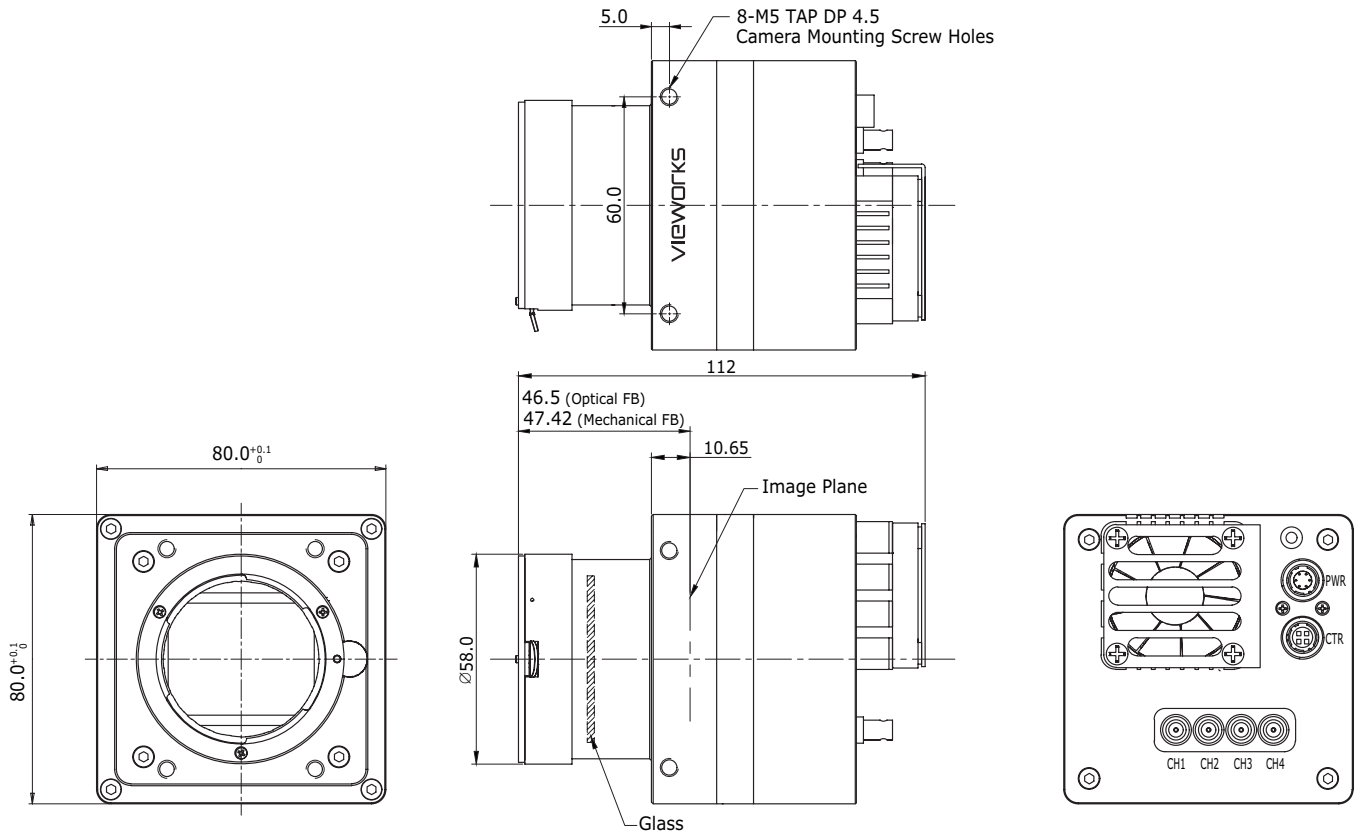

For more information please contact local distributor or visit our website at <http://www.viewworks.com>.

Reproduction in whole or in part without written permission is prohibited. Viewworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

D-18-113

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VIEWWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
tel +82-70-7011-6161 fax +82-31-386-8631 e-mail sales@viewworks.com

VC-65MX-M/C 35 I VC-65MX-M/C 31 I

65 Megapixel High Speed CMOS Digital Camera



CoaxPress®

The VC-65MX-31 I and VC-65MX-35 I, the latest models of the industrial proven VC series, are new 65 megapixel CoaxPress cameras and based on the latest CMOS image sensor technology (GMAX3265) from Gpixel. The VC-65MX-31 I offers up to 31.6 frames per second at 9344 × 7000 resolution. For high speed applications, the VC-65MX-35 I offers up to 35.5 frames per second at 9344 × 7000 resolution.

Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-65MX cameras offer not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, these cameras are ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VIEWORKS

www.vieworks.com

VC-65MX-M/C 35 I / VC-65MX-M/C 31 I

65 Megapixel High Speed CMOS Digital Camera

Main Features

- 65 Megapixel Resolution
- CoaXPress Interface up to 35.5 fps at 25 Gbps using 4 CH
- Global Shutter CMOS Technology
- DSNU and PRNU Correction
- Flat Field Correction
- Defective Pixel Correction
- Hot Pixel Correction
- GenICam Compatible – XML based Control

Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning


Specifications

Model		VC-65MX-M/C 31 I	VC-65MX-M/C 35 I
Resolution (H × V)		9344 × 7000	
Sensor		Gpixel GMAX3265 – Normal Speed	Gpixel GMAX3265 – High Speed
Sensor Size (Diagonal)		29.9 mm × 22.4 mm (37.4 mm)	
Pixel Size		3.2 μm × 3.2 μm	
Interface		CoaXPress	
Max. Frame Rate		4 CH: 31.6 fps @ 8 bit	4 CH: 35.5 fps @ 8 bit
		4 CH: 27.3 fps @ 10 bit	4 CH: 27.5 fps @ 10 bit
		4 CH: 24.1 fps @ 12 bit	N/A @ 12 bit
		4 CH: 31.6 fps @ 8 bit (2×2 Binning)	4 CH: 71.1 fps @ 8 bit (2×2 Binning)
Exposure Time (1 μs step)		14 μs – 60 s	12 μs – 60 s
Partial Scan (Max. Speed)		6349.2 fps at 4 Lines	7142.8 fps at 4 Lines
Binning		2 × 2 Binning	
Pixel Data Format	Mono	Mono 8 / Mono 10 / Mono 12	Mono 8 / Mono 10
	Color	GB Bayer 8 / GB Bayer 10 / GB Bayer 12	GB Bayer 8 / GB Bayer 10
Electronic Shutter		Global Shutter	
Trigger Synchronization		Free-Run, Hardware Trigger, Software Trigger or CXP	
External Trigger		3.3 V ~ 24.0 V, 10 mA, Logical Level Input, Optically Isolated	
Software Trigger		Asynchronous, Programmable via Camera API	
Dynamic Range		66 dB @ 12 bit	62 dB @ 10 bit
Gain Control		1 × ~ 32 ×	
Black Level Control		0 ~ 255 LSB at 12 bit	0 ~ 63 LSB at 10 bit
Dimension / Weight		80 mm × 80 mm × 103 mm, 750 g (with F-mount)	
Temperature		Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount		F-mount, Custom mount available upon request	
Power	External	11 ~ 24 V DC	
	Dissipation	Typ. 13.5 W	Typ. 17.5 W
	PoCXP	24 V DC, Minimum of two PoCXP cables required	
Compliance		CE, FCC, KC	
API SDK		Vieworks Imaging Solution 7.X	


VC-65MX-M/C 35 I / VC-65MX-M/C 31 I

65 Megapixel High Speed CMOS Digital Camera

Spectral Response

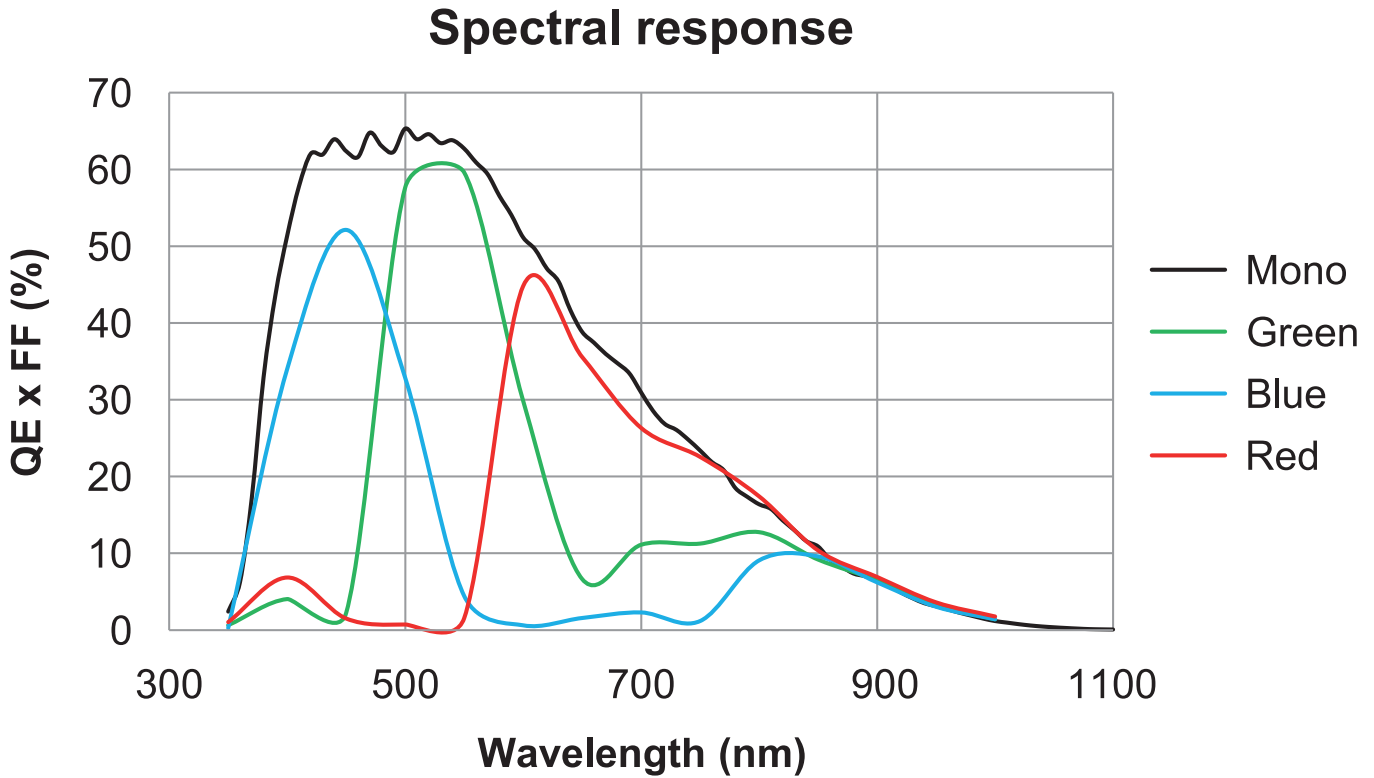

Ordering Scheme

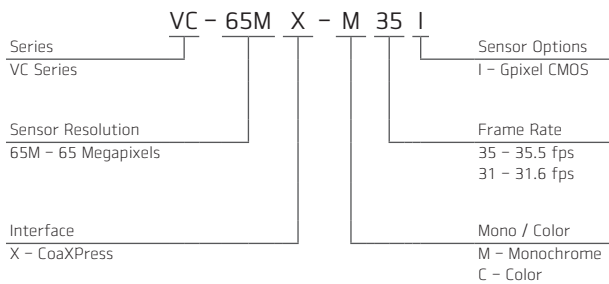


Connector Specification

Power




1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+
2: Trigger IN-
3: Strobe Out-(GND)
4: Strobe Out+
(HR10A-7R-4S)

Data Transfer / Communications



CH1 CH2 CH3 CH4

CH1: Master Connection
75 Ω, DIN 1.0/2.3



Connectors on camera body

VC-65MX-M/C 35 I / VC-65MX-M/C 31 I

65 Megapixel High Speed CMOS Digital Camera

Mechanical Dimensions

Unit: mm

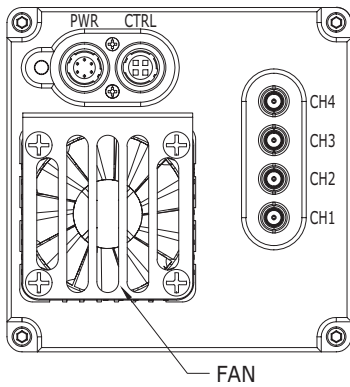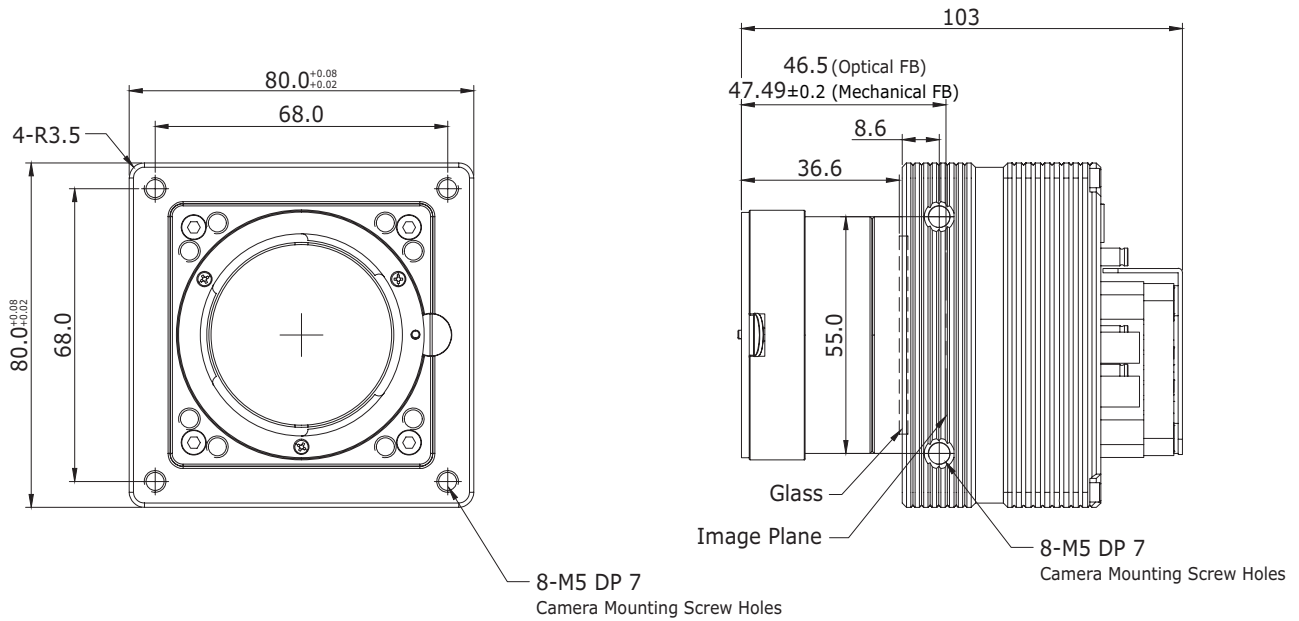

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VC-71MC-M/C 4

71 MEGAPIXELS

ULTRA HIGH RESOLUTION CMOS DIGITAL CAMERA



The VC-71MC, the latest member of the industrial proven VC series, is a new 71 megapixel resolution CMOS camera with Camera Link interface. The VC-71MC uses the latest 71 megapixel CMOS imaging sensor (CHR 70M) technology from CMOSIS, and offers a frame rate of 4 fps at full resolution. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-71MC camera offers not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, this camera is ideal for demanding applications such as FPD, PCB, and semiconductor inspections.

VIEWORKS

Main Features

- * 71 Megapixel Resolution
- * Ultra High Resolution CMOS Imaging Sensor
- * Camera Link Medium Interface up to 4.2 fps
- * Rolling Shutter
- * Flat Field Correction
- * Pixel Defect Correction
- * Non-uniformity Correction (DSNU and PRNU)
- * Field Upgradable Firmware

Applications

- * FPD, Electronics and Semiconductor Inspection
- * Research and Scientific Imaging
- * Document / Film Scanning


Specifications

Model	VC-71MC-M/C 4	
Resolution (H × V)	10000 × 7096	
Sensor	CMOSIS CHR70M	
Sensor Size (Optical Format)	31.00 mm × 22.00 mm (38 mm)	
Sensor Type	High Resolution CMOS Imaging Sensor	
Pixel Size	3.1 μm × 3.1 μm	
Interface	2 Tap	Camera Link Base
	4 Tap – Normal	Camera Link Medium
	4 Tap – High	
Max. Frame Rate	2.1 fps (CL Base)	
	3.0 fps (CL Medium)	
	4.2 fps (CL Medium / Overclocked)	
Transfer Time	476 ms (CL Base)	
	335 ms (CL Medium)	
	238 ms (CL Medium / Overclocked)	
Exposure Time	66 μs ~ 7 s (1 line step)	
Pixel Data Format	8 / 10 / 12 bit	
Electronic Shutter	Rolling Shutter	
Data Output	2 Tap	85 MHz
Pixel Clock Speed	4 Tap	Normal: 60 MHz / High: 85 MHz
Trigger Mode	Free-Run, External Trigger Programmable Exposure Time and Trigger Polarity	
Dynamic Range	63 dB	
Dimension / Weight	68 mm × 68 mm × 103 mm, 420 g (F-mount)	
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount	F-mount, Custom mount available upon request	
Power	10 ~ 38 V DC, Typ. 7.5 W	
Compliance	CE, FCC, KC (in preparation)	
Configuration Software	Configurator	


VC-71MC-4

71 MEGAPIXELS - ULTRA HIGH RESOLUTION CMOS DIGITAL CAMERA

Quantum Efficiency Curves

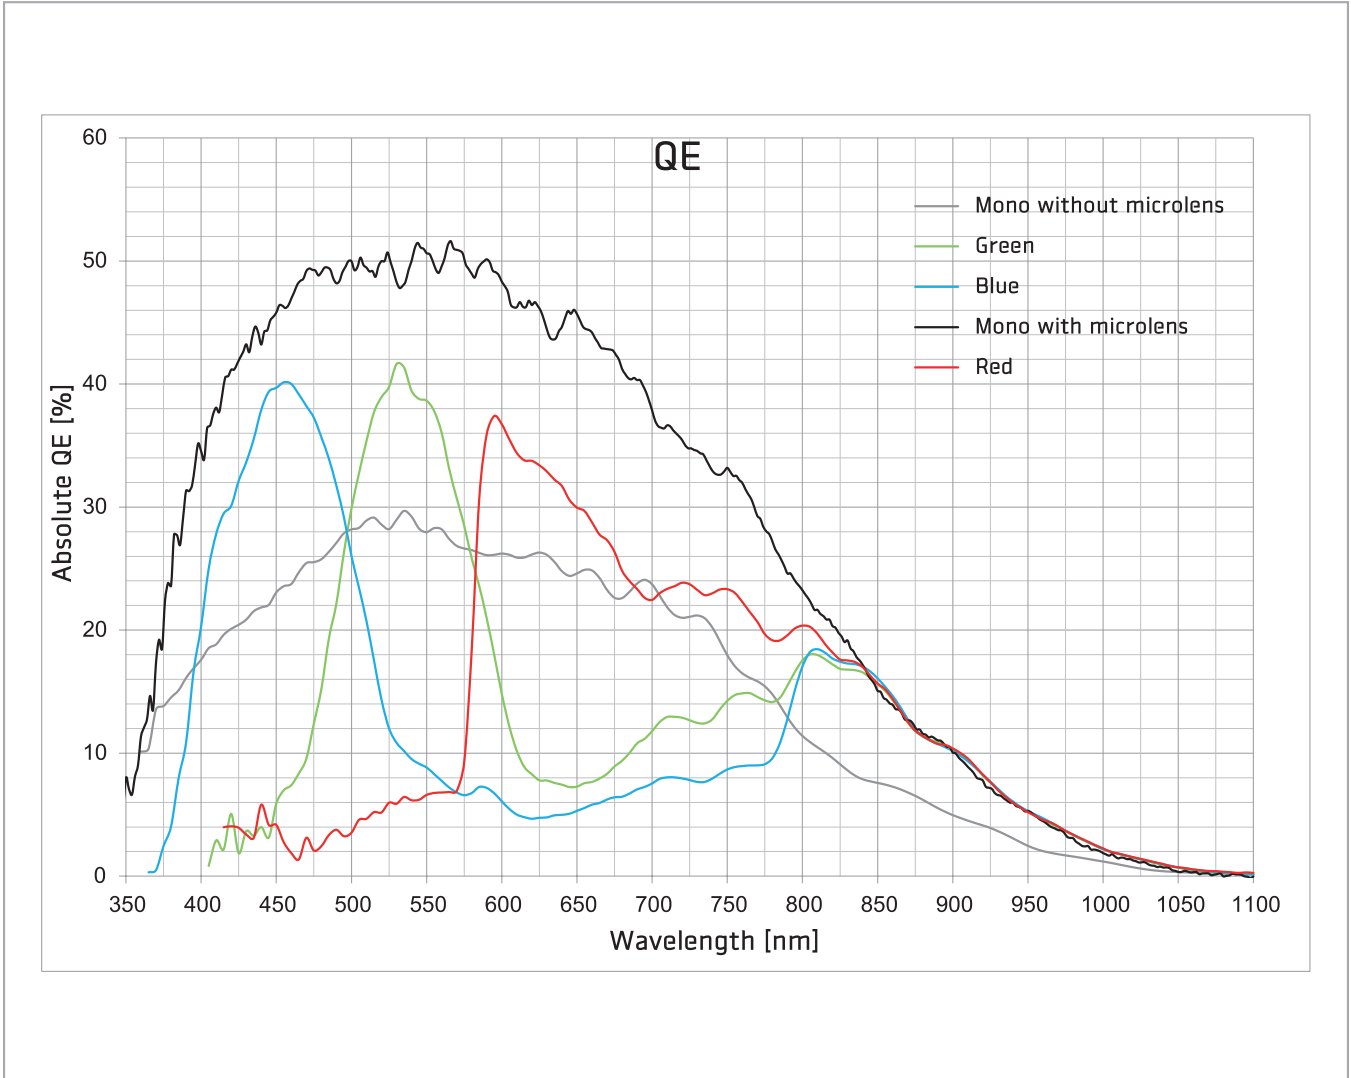

Ordering Scheme

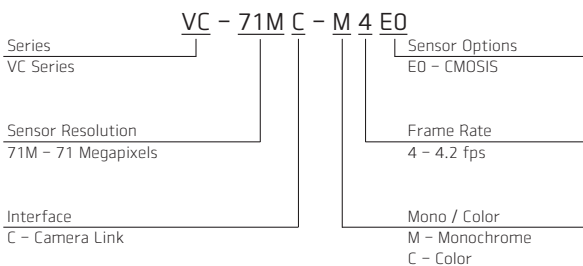


Connector Specification

Power



1 2 3: +12V DC, 4 5 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+, 2: Trigger IN-
3: DC Ground, 4: Strobe OUT+
(HR10A-7R-4S)



Connectors on camera body

VC-71MC-4

71 MEGAPIXELS - ULTRA HIGH RESOLUTION CMOS DIGITAL CAMERA

Mechanical Dimensions

Unit: mm

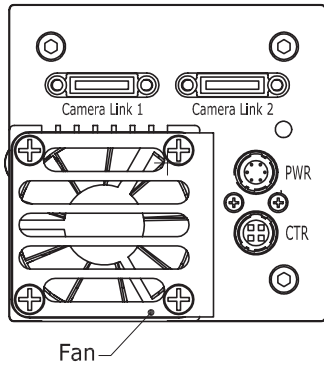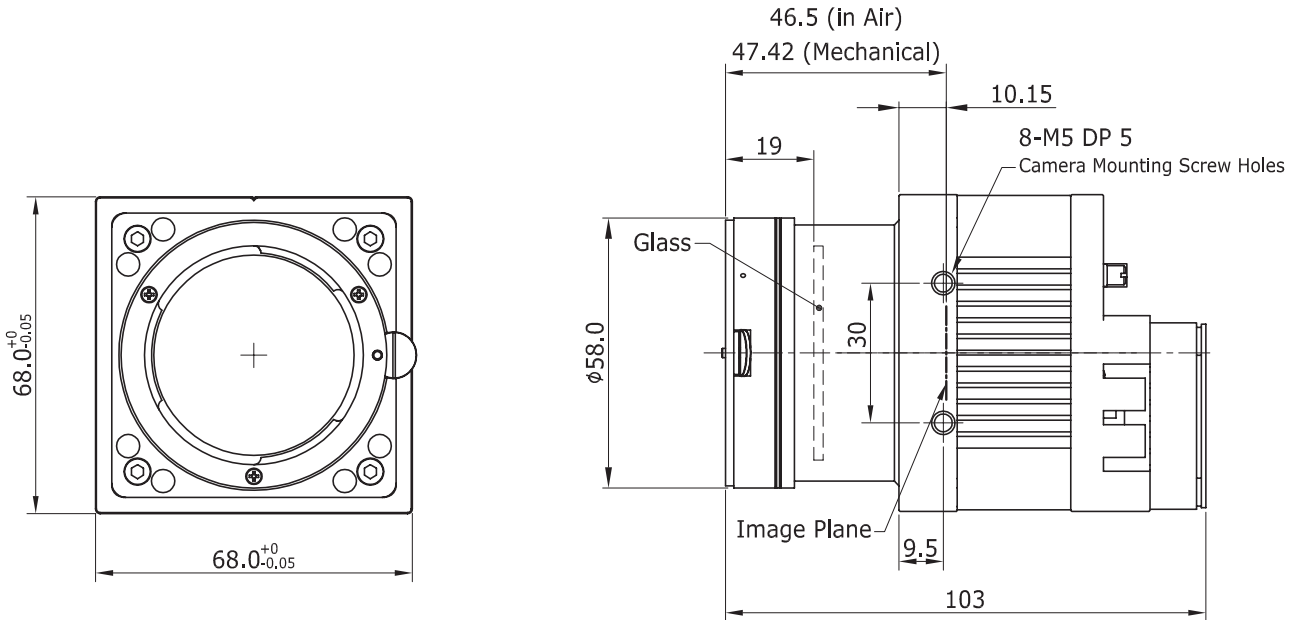

For more information please contact local distributor or visit our website at <http://www.vieworks.com>.

Reproduction in whole or in part without written permission is prohibited. Vieworks Co., Ltd. is not responsible for any technical or typographical errors and reserves the right to make changes to products, specifications and documentation without prior notice.

VW40-15B-001

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

VIEWWORKS

41-3, Burim-ro 170 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14055 Republic of Korea
tel +82-70-7011-6161 fax +82-31-386-8631 e-mail sales@vieworks.com

VC-101MC-M/C 8 H VC-151MC-M/C 5 H

Ultra High Resolution CMOS Digital Camera



The VC-101MC and VC-151MC, the latest models of the industrial proven VC series, are 101 and 151 megapixel resolution CMOS cameras available with the Camera Link interface. These cameras are based on the latest CMOS image sensor technology (IMX461 and IMX411) from Sony Semiconductor Solutions Corporation. The VC-101MC-8 offers up to 8.1 frames per second at 11648×8742 resolution. For even higher resolution applications, the VC-151MC-5 offers up to 5.5 frames per second at 14192×10640 resolution. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-101MC and VC-151MC cameras offer not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, these cameras are ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VIEWORKS

www.vieworks.com

VC-101MC-8 H / VC-151MC-5 H

Ultra High Resolution CMOS Digital Camera

Main Features

- 101 or 151 Megapixel Resolution
- Camera Link Full Interface
- Electronic Rolling Shutter
- DSNU and PRNU Correction
- Flat Field Correction with Sequencer Control
- Hot Pixel Correction
- Dynamic Defective Pixel Correction
- 4 Gb Frame Buffer for Burst Readout Mode

Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning



Specifications

Model		VC-101MC-M/C 8 H	VC-151MC-M/C 5 H
Resolution (H × V)		11648 × 8742	14192 × 10640
Sensor		SONY IMX461	SONY IMX411
Sensor Size (Diagonal)		43.80 mm × 32.87 mm (55 mm)	53.36 mm × 40.01 mm (66.7 mm)
Pixel Size		3.76 μm × 3.76 μm	
Interface		Camera Link Base / Medium / Full / 10 Tap, 26-pin SDR Connector	
Max. Frame Rate		8.1 fps (with Overlapped Acquisition)	5.5 fps (with Overlapped Acquisition)
Camera Image Memory		4 Gb	
Exposure Time (1 μs step)		1 μs – 60 s	
Binning	Sensor	×1, ×3 (Horizontal and Vertical Dependent)	
	Logic	×1, ×2, ×4 (Horizontal and Vertical Independent)	
Pixel Data Format		8 / 10 / 12 bit	
Data Output Pixel Clock Speed		65 MHz / 85 MHz	
Electronic Shutter		Rolling Shutter	
Trigger Synchronization	Overlapped Acquisition	Free-Run	
	Non-overlapped Acquisition	Hardware Trigger or CC1	
Dynamic Range		78 dB	
Gain Control		1× ~ 32×	
Black Level Control		0 ~ 255 LSB at 12 bit	
Dimension / Weight		90 mm × 90 mm × 92.5 mm, 800 g (with M-72 mount)	100 mm × 100 mm × 92.5 mm, 1070 g (with M-72 mount)
Temperature		Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount		M72-mount, Custom mount available upon request	
Power	External	11 ~ 24 V DC	
	Dissipation	Typ. 15.5 W	
Compliance		CE, FCC, KC	
API SDK		Vieworks Imaging Solution 7.X	


VC-101MC-8 H / VC-151MC-5 H

Ultra High Resolution CMOS Digital Camera

Relative Sensitivity Curves

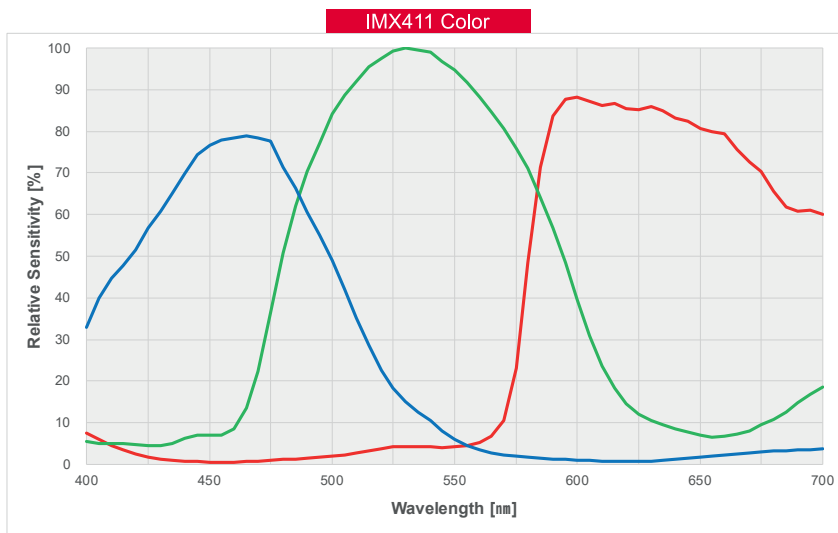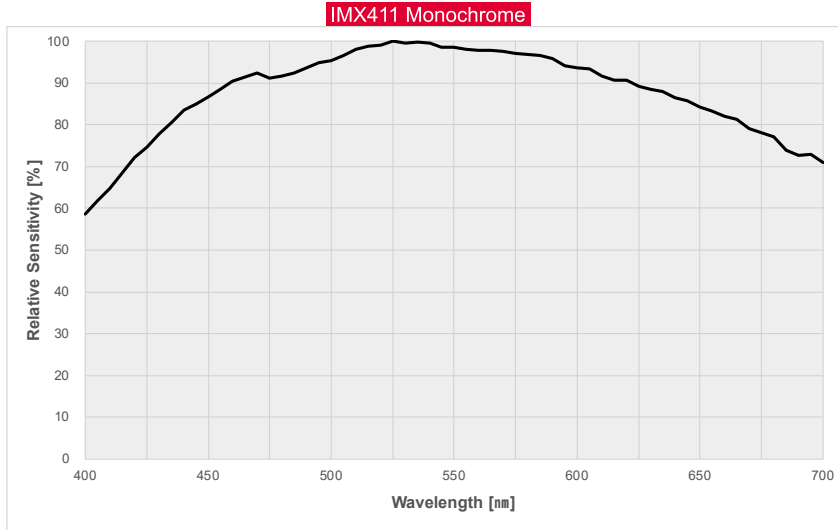

Ordering Scheme

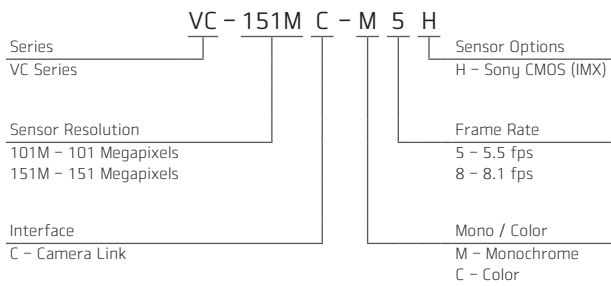


Connector Specification

Power



1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+
2: Trigger IN-
3: Strobe Out-(GND)
4: Strobe OUT+
(HR10A-7R-4S)

Connectors on camera body


VC-101MC-8 H / VC-151MC-5 H

Ultra High Resolution CMOS Digital Camera


Mechanical Dimensions

Unit: mm

VC-101MC-M/C 8 H

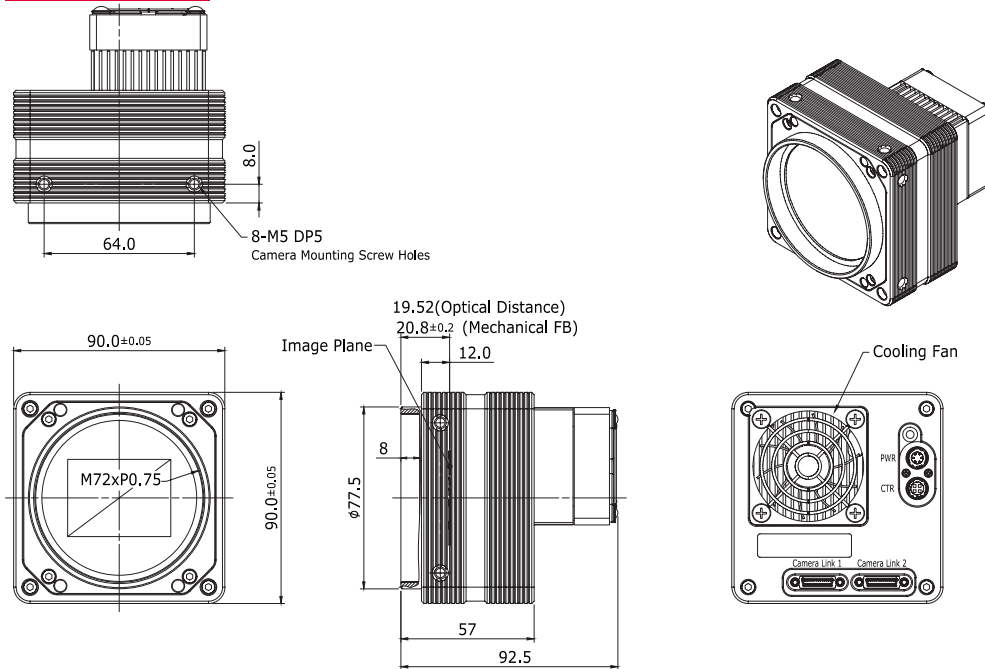

VC-151MC-M/C 5 H

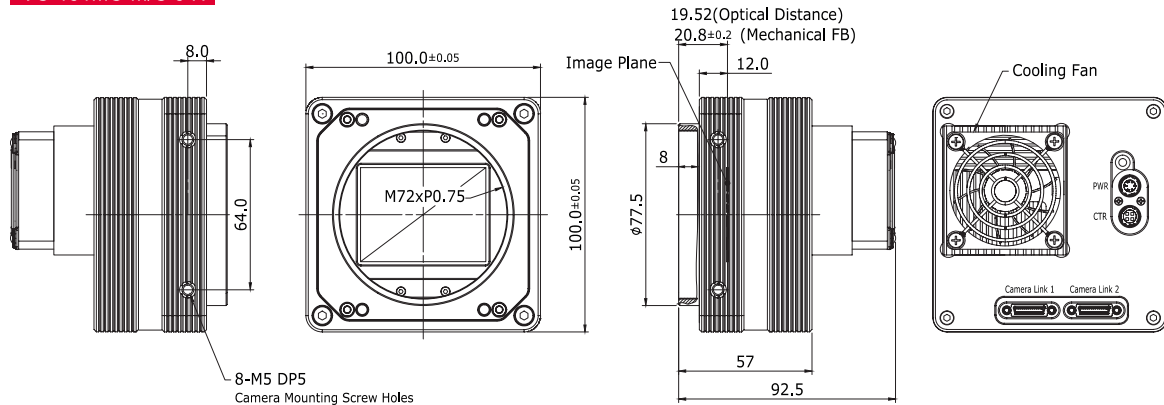


For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

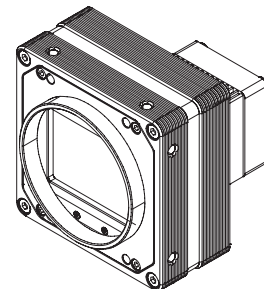

VC-101MX-M/C 9 H VC-151MX-M/C 6 H

Ultra High Resolution CMOS Digital Camera



The VC-101MX and VC-151MX, the latest models of the industrial proven VC series, are new 101 and 151 megapixel CoaXPress cameras and based on the latest CMOS image sensor technology (IMX461 and IMX411) from Sony Semiconductor Solutions Corporation. The VC-101MX-9 offers up to 8.7 frames per second at 11648×8742 resolution. For even higher resolution applications, the VC-151MX-6 offers up to 6.2 frames per second at 14192×10640 resolution. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-101MX and VC-151MX cameras offer not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, these cameras are ideal for demanding applications such as FPD, PCB and semiconductor inspections.

VIEWORKS

www.vieworks.com

VC-101MX-9 H / VC-151MX-6 H

Ultra High Resolution CMOS Digital Camera

Main Features

- 101 or 151 Megapixel Resolution
- CoaXPress Interface
- Electronic Rolling Shutter
- DSNU and PRNU Correction
- Flat Field Correction with Sequencer Control
- Hot Pixel Correction
- Dynamic Defective Pixel Correction

Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning



Specifications

Model		VC-101MX-M/C 9 H	VC-151MX-M/C 6 H
Resolution (H × V)		11648 × 8742	14192 × 10640
Sensor		SONY IMX461	SONY IMX411
Sensor Size (Diagonal)		43.80 mm × 32.87 mm (55 mm)	53.36 mm × 40.01 mm (66.7 mm)
Pixel Size		3.76 μm × 3.76 μm	
Interface		CoaXPress (CXP-3 / CXP-6)	
Max. Frame Rate		8.7 fps (with Overlapped Acquisition)	6.2 fps (with Overlapped Acquisition)
Exposure Time (1 μs step)		1 μs – 60 s	
Binning	Sensor	×1, ×3 (Horizontal and Vertical Dependent)	
	Logic	×1, ×2, ×4 (Horizontal and Vertical Independent)	
Pixel Data Format		8 / 10 / 12 / 14 / 16 bit	
Electronic Shutter		Rolling Shutter	
Trigger Synchronization	Overlapped Acquisition	Free-Run	
	Non-overlapped Acquisition	Hardware Trigger, Software Trigger or CXP	
Dynamic Range		78 dB	
Gain Control		1 × ~ 32 ×	
Black Level Control		0 ~ 4095 LSB at 16 bit	
Dimension / Weight		90 mm × 90 mm × 92.5 mm, 800 g (with M-72 mount)	100 mm × 100 mm × 92.5 mm, 1070 g (with M-72 mount)
Temperature		Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Software Trigger		Asynchronous, Programmable via Camera API	
Lens Mount		M72-mount, Custom mount available upon request	
Power	External	11 ~ 24 V DC	
	Dissipation	Typ. 15.5 W	
Compliance		CE, FCC, KC	
API SDK		Viewworks Imaging Solution 7.X	


VC-101MX-9 H / VC-151MX-6 H

Ultra High Resolution CMOS Digital Camera

Relative Sensitivity Curves

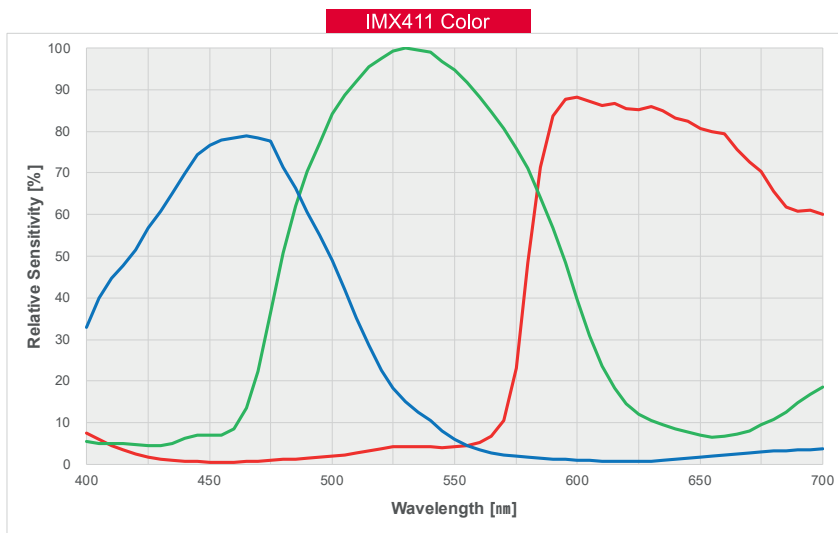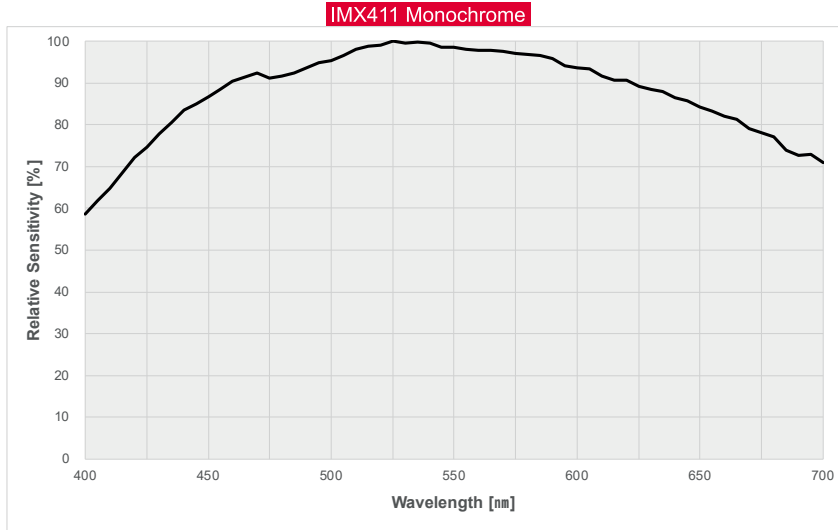

Ordering Scheme

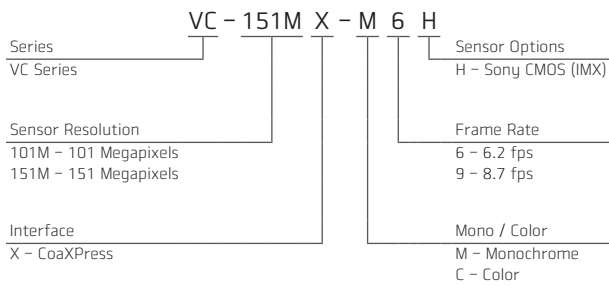


Connector Specification

Power




1, 2, 3: +12V DC
4, 5, 6: GND
(HR10A-7R-6PB)

Control



1: Trigger IN+
2: Trigger IN-
3: Strobe OUT-(GND)
4: Strobe OUT+
(HR10A-7R-4S)

Data Transfer / Communications



CH1 CH2 CH3 CH4

CH1: Master Connection
75 Ω, DIN 1.0/2.3

Connectors on camera body


VC-101MX-9 H / VC-151MX-6 H

Ultra High Resolution CMOS Digital Camera


Mechanical Dimensions

Unit: mm

VC-101MX-M/C 9 H

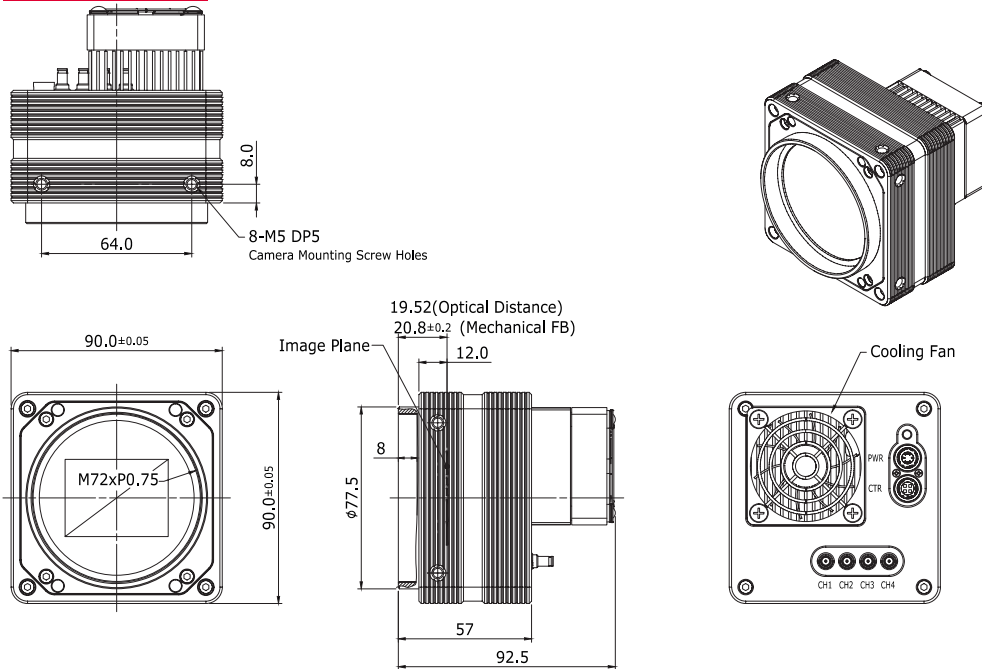

VC-151MX-M/C 6 H

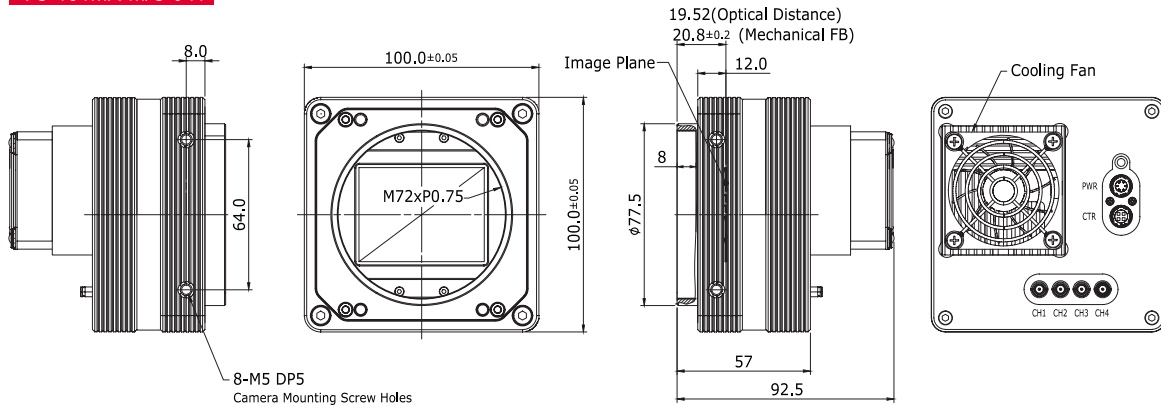

For more information please contact:



BOCK OPTRONICS INC.

14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

