


**SMALL, HIGH PERFORMANCE
UNCOOLED THERMAL MODULE**

Xenics
EXOSENS GROUP

XTM+ 640 Series

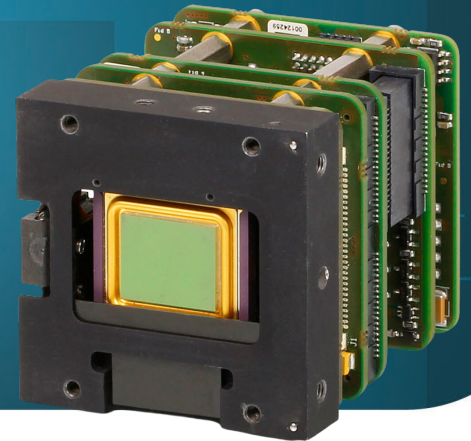

*SMALL, HIGH PERFORMANCE UNCOOLED
THERMAL MODULE*

KEY FEATURES



COMPACT SIZE



FRAME RATES UP TO 60 Hz



**EASY CONNECTIVITY VIA
MULTIPLE INTERFACES**

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca

The XTM+ 640 Series is based on an uncooled microbolometer detector with a 640 x 480 pixel resolution.


The XTM+ 640 offers frame rates up to 60 Hz and lower detector NETD options (< 30 mK available upon request).

The modules come with either a CameraLink, GigE Vision or QTE Samtec interface and feature low weight and power.



exosens.com

XTM+ 640 Series

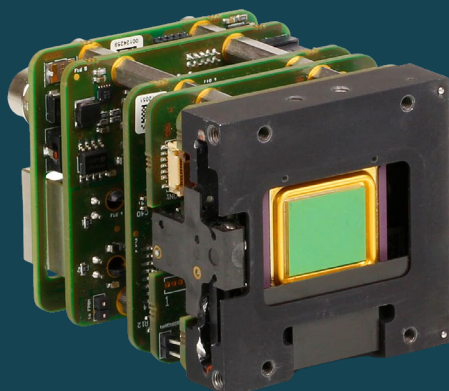

KEY PERFORMANCES

Image format / Pixel pitch	640 x 480 pixels / 17 μ m
Integration type	Rolling shutter
Spectral range	8 - 14 μ m
Max frame rate (full frame)	60 Hz or 9 Hz (CL; GigE; 16bit DV)
Power consumption	2.9 W (CL); 4.6 W (GigE); 2.7 W (16bit DV)
Power supply voltage	DC 12 V (CL); DC 12 V or PoE (Power over Ethernet)(GigE); DC 3.3 V (16bit DV)

FUNCTIONS & INTERFACES

Digital output format	CL; GigE; 16bit DV
Ambient operating temperature range	From -40°C to +60°C; also available in temperature range 0°C - 50°C
Storage temperature	From -40°C to +85°C
Detector NETD	<50 mK (at 30Hz, 300K, F/1); <30 mK (available upon request)
Shock / Vibration	40 g, 11 ms, MIL-STD810G, MIL-STD883J / 5 g (20 to 2000 Hz), MIL-STD810G, MIL-STD883J

PRODUCT SELECTOR GUIDE

XEN-000637 (XTM+ 640 GigE)	XEN-000642 (XTM+ 640 GigE [9 Hz])
XEN-000638 (XTM+ 640 CL)	XEN-000643 (XTM+ 640 CL [9 Hz])
XEN-000635 (XTM+ 640 16bit DV)	XEN-000640 (XTM+ 640 16bit DV [9 Hz])

advancedimaging@exosens.com



exosens.com

EXOSENS
REVEAL THE INVISIBLE

© Xenics. The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by Xenics nor by any Exosens Group companies. Performance data represents typical characteristics as individual product performance may vary. Customers should verify that they have the most current Xenics product information before placing orders. Texts and pictures may not be considered as contractually binding. This document may not be reproduced, in whole or in part, without the prior written consent of Xenics.