

**ULTRA SENSITIVE
INTENSIFIED CAMERA**


PHOTONIS
EXOSENS GROUP

iNocturn Series



**HIGH SENSITIVITY CAMERA WITH FAST
GATING CAPABILITY**

KEY FEATURES



**PHOTONIS EXPERTISE COMBINING
IN-HOUSE IMAGE INTENSIFIER
TUBE + CMOS SENSOR**



ULTRA SENSITIVE



HIGH SPATIAL RESOLUTION



GATING CAPABILITY

The superior intensified camera extracting the best of image intensifier tube and sensitive low light camera

The iNocturn series features a unique combination of ultra-sensitivity, low SWaP, high frame rate, high-QE photodetectors, and nano-second gating



iNocturn Series

SPECIFICATIONS

Camera resolution	1280 x 1024 pixels
Frame rate	Up to 100 fps at full resolution
Spectral range	200 – 1100 nm subject to photocathode choice
Gating options	Gated or non-gated
Minimum detection capability	Up to single photon
Connection	PAL/NTSC, CameraLink, HD-SDI, USB 3.0, LVCMOS
Lens mount	C-mount
Operational temperature	-10 C to +55 C


Key technical features

- ◆ Gating capability
- ◆ Video output: HD-SDI, Camera Link or PAL/NTSC, USB 3.0

Applications

- ◆ Corona Discharge Detection
- ◆ Quantum Computing
- ◆ Armored Vehicle
- ◆ Surveillance Operations

VARIOUS PHOTOCATHODES FOR TARGETED WAVELENGTH DETECTION

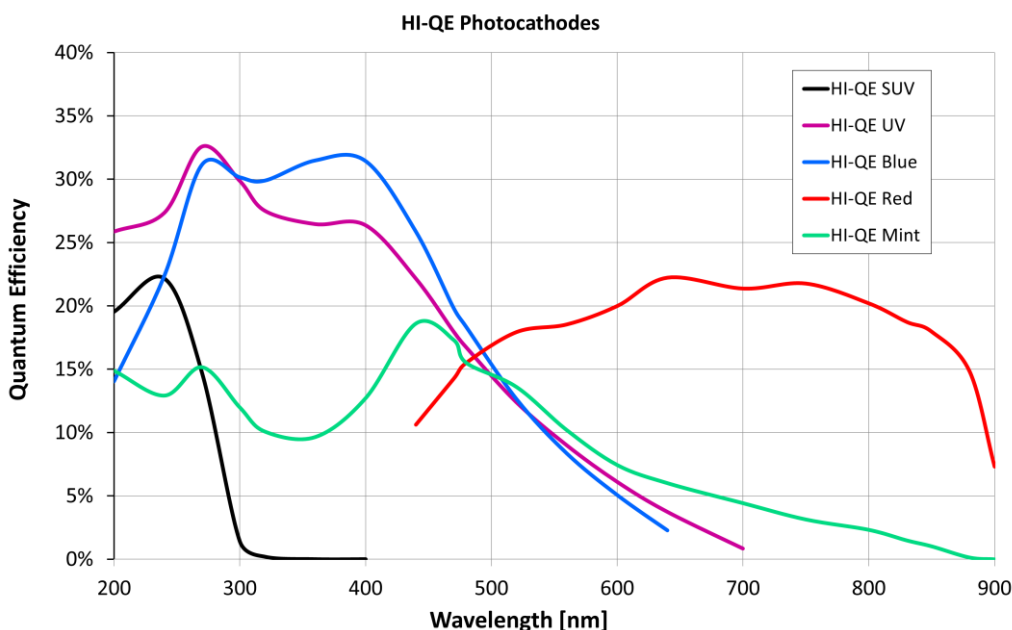

Thanks to a choice of various photocathodes, the iNocturn covers different ranges of wavelengths from UV to Near Infrared enabling the user to focus on a specific range of wavelength for a particular application

For more information please contact:



BOCK OPTRONICS INC.
14 Steinway Blvd., Unit 7
Toronto, Ontario M9W 6M6

Tel: (416) 674-2804
sales@bockoptronics.ca
www.bockoptronics.ca



exosens.com

EXOSENS
REVEAL THE INVISIBLE